



ESTER
95ESTER800/GR



ESTER
95ESTER500/GR



ESTER
95ESTERWL/GR



IP55

Resin



ESTER

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length/ Diameter (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95ESTER800/GR	C	10	1200	3000/4000/6500- adjustable	Grey	126	126	800	1/6	A+ A++ A
95ESTER500/GR	C	10	1200	3000/4000/6500- adjustable	Grey	126	126	480	1/12	A+ A++ A
95ESTERWL/GR	C	10	1200	3000/4000/6500- adjustable	Grey	126	165	126	1/18	A+ A++ A

Body: Resin with clear glass | UV resistant | Lamp holder: GX53 | Lamp included



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.

ESTER
901

GARDEN



GRF966
966W250



GRF966
966P500



GRF966
966P300



GRF966
966P800

GRF966

902

GARDEN

IP65



GRF966

Catalogue number	Product category	Model	Watt (W)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
966W250	C	GRF966-W	MAX 18W	dark grey	250	72	107	1/16	A++→C
966P300	C	GRF966-30	MAX 18W	dark grey	300	72	72	1/9	A++→C
966P500	C	GRF966-50	MAX 18W	dark grey	500	72	72	1/9	A++→C
966P800	C	GRF966-80	MAX 18W	dark grey	800	72	72	1/9	A++→C

Body: aluminium | Diffuser: polycarbonate (PC) | Operating temperature: -20°C+65°C



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



GRF965
965W200

GRF965
965P500

GRF965
965P300

GRF965
965P800

GRF965

903

GARDEN

IP65



GRF965

Catalogue number	Product category	Model	Watt (W)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
965W200	C	GRF965	MAX 23W	dark grey	200	175	190	1/8	A++→C
965P300	C	GRF965-30	MAX 23W	dark grey	300	175	-	1/8	A++→C
965P500	C	GRF965-50	MAX 23W	dark grey	500	175	-	1/4	A++→C
965P800	C	GRF965-80	MAX 23W	dark grey	800	175	-	1/4	A++→C

Body: aluminium | Diffuser: polycarbonate (PC) | Operating temperature: -20°C/+65°C

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



HECTORW1
96100006



HECTORW2
96100010

HECTOR / TARA

904

GARDEN

IP44



UNTIL SUPPLY
LAST

HECTOR / TARA

Catalogue number	Product category	Model	Watt (W)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
96100006	F	Wall	max 11W	satın nickel	377	80	-	1/20	A++A
96100010	F	Wall	max 11W	satın nickel	390	80	145	1/12	A++A

Body: stainless steel | Diffuser: ABS





PMMA CLEAR
96400023A60LED



PMMA CLEAR
96400024G95LED
96400025G95LED



PMMA CLEAR
9640002730LED
9640002740LED



PMMA CLEAR

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour aluminium ring	Diameter (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
96400023A60LED	C	18	1700	4000	clear	200	100	210	1/16	A+ A++A
96400024G95LED	C	20	1800	4000	clear	250	125	260	1/12	A+ A++A
96400025G95LED	C	20	1800	4000	clear	300	145	310	1/6	A+ A++A
9640002730LED	C	30	2700	4000	clear	400	220	410	1/2	A+ A++A
9640002740LED	C	40	3600	4000	clear	400	220	410	1/2	A+ A++A

Diffuser: PMMA (polymethyl methacrylate) | Lamp holder: E27 | Mounting: Metal pole φ60



SP60 METAL POLE
Colour: black
Size (mm):
Diameter 60 x Base Ø 145
Height: 600 - 93SP60BL
Height: 800 - 93SP80BL
Height: 1000 - 93SP100BL
Height: 1200 - 93SP120BL



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



PMMA OPAL

- 96300016
- 96300017
- 96300018
- 96300019



PMMA CLEAR

- 96400023
- 96400024
- 96400025
- 96400027



IP65

PMMA OPAL / CLEAR

Catalogue number	Product category	Watt (W)	Colour	Diameter (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
96300016	C	max 11W	opal	200	100	210	1/16	A++→B
96300017	C	max 15W	opal	250	125	260	1/12	A++→B
96300018	C	max 20W	opal	300	145	310	1/6	A++→B
96300019	C	max 40W	opal	400	220	410	1/2	A++→B
96400023	C	max 11W	clear	200	100	210	1/16	A++→B
96400024	C	max 15W	clear	250	125	260	1/12	A++→B
96400025	C	max 20W	clear	300	145	310	1/6	A++→B
96400027	C	max 40W	clear	400	220	410	1/2	A++→B

Diffuser: PMMA (polymethyl methacrylate) | Lamp holder: E27 | Mounting: Metal pole φ60 | Lamps not included



SP60 METAL POLE
Colour: black
Size (mm):
Diameter 60 x Base Ø 145
Height: 600 - 93SP60BL
Height: 800 - 93SP80BL
Height: 1000 - 93SP100BL
Height: 1200 - 93SP120BL



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



NINA 150
96NINA150/BL



NINA 150
96NINA150/GR



NEUTRAL
WHITE
4000K

IP55


Resin



NINA 150

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
96NINA150/BL	C	4	400	4000	black	145	50	50	1	A+ A++ A
96NINA150/GR	C	4	400	4000	grey	145	50	50	1	A+ A++ A

Body: Resin | Lamp holder: R7s | Lamp included

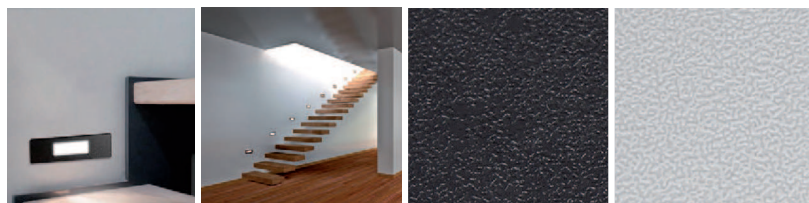

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days..



LETI 100
96LETI100/BL
96LETI100/GR



LETI 100GR
96LETI100GR/BL



LETI 100EL
96LETI100EL/BL
96LETI100EL/GR



LED 3000 K 4000 K 6000 K **IP55** **Resin**

LETI 100

Catalogue number	Product category	Model	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Diameter 1 (mm)	Width (mm)	Packing/Box (pcs)	Energy class
96LETI100/BL	C	LETI 100	3	350	3000/4000/6500- adjustable	Black	134	96	80	1/48	A+ A++-A
96LETI100/GR	C	LETI 100	3	350	3000/4000/6500- adjustable	Grey	134	96	80	1/48	A+ A++-A
96LETI100GR/BL	C	LETI 100GR	3	350	3000/4000/6500- adjustable	Black	134	96	80	1/48	A+ A++-A
96LETI100EL/BL	C	LETI 100EL	3	350	3000/4000/6500- adjustable	Black	134	96	80	1/48	A+ A++-A
96LETI100EL/GR	C	LETI 100EL	3	350	3000/4000/6500- adjustable	Grey	134	96	80	1/48	A+ A++-A

Body: Resin with opal glass | UV resistant | Lamp holder: GX53 | Lamp included




~230V 50/60 Hz Ra>80 >15000 INSTANT 100% **3+2** standard +extended **5** YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days..



LETI 300

96LETI300/BL
96LETI300/GR

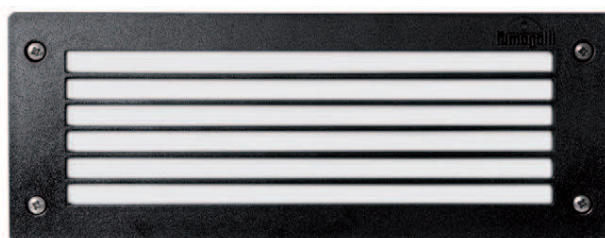

LETI 300GL

96LETI300GL/BL



LETI 300VP

96LETI300VP/BL

IP55

Resin



LETI 300

Catalogue number	Product category	Model	Colour body	Length (mm)	Height (mm)	Width (mm)	Lampholder	Packing/Box (pcs)	Energy class
96LETI300/BL	C	LETTI 300	Black	293	113	98	1xE27	1/24	A++→E
96LETI300/GR	C	LETTI 300	Grey	293	113	98	1xE27	1/24	A++→E
96LETI300GL/BL	C	LETTI 300GL	Black	293	113	98	1xE27	1/24	A++→E
96LETI300VP/BL	C	LETTI 300VP	Black	113	293	98	1xE27	1/24	A++→E

Body: Resin with opal glass | UV resistant | Lamp not included



RoHS **CE** **3+2** standard +extended **5** YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.

LETI 300

909

GARDEN



LED WALL FIXTURE 1.5W
96GRFLED52/DGR



LED WALL FIXTURES 1.8W
96GRFLED02/WH

GRF LED WALL FIXTURES

910

GARDEN



GRF LED WALL FIXTURES

Catalogue number WHITE	Catalogue number GREY	Catalogue number DARK GREY	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Height (mm)	Width (mm)	Packing/Box (pcs)	Energy class
96GRFLED52/WH	96GRFLED52/GR	96GRFLED52/DGR	C	1.5	60	4000	125	125	20.5	1/40	A++A
96GRFLED02/WH	96GRFLED02/GR	96GRFLED02/DGR	C	1.8	90	4000	230	80	16.5	1/24	A++A

Body material: ABS | Diffuser: PVC | Light source: 2835 SMD
Light source: LED type Ø5mm recessed fixture | Operating temperature: -20°C÷+65°C



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LORENZA 150
95LORENZA150/BL



LORENZA 150
95LORENZA150/GR



LORENZA 190
95LORENZA190/BL



LORENZA 190
95LORENZA190/GR



NEUTRAL
WHITE
4000K

IP55

Resin

LORENZA

Catalogue number	Product category	Model	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Height (mm)	Width (mm)	Packing/Box (pcs)	Energy class
95LORENZA150/BL	C	LORENZA 150	4	400	4000	Black	150	150	45	1/24	A+ A++A
95LORENZA150/GR	C	LORENZA 150	4	400	4000	Grey	150	150	45	1/24	A+ A++A
95LORENZA190/BL	C	LORENZA 190	8.5	900	4000	Black	190	150	45	1/24	A+ A++A
95LORENZA190/GR	C	LORENZA 190	8.5	900	4000	Grey	190	150	45	1/24	A+ A++A

Body material: Resin with clear glass | UV resistant | Lamp holder: R7s | Lamp included



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ABRAM 150
95ABRAM150/BL



ABRAM 150
95ABRAM150/GR



ABRAM 190
95ABRAM190/BL



ABRAM 190
95ABRAM190/GR

ABRAM

912

GARDEN



NEUTRAL
WHITE
4000K

IP55

Resin



ABRAM

Catalogue number	Product category	Model	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Height (mm)	Width (mm)	Packing/Box (pcs)	Energy class
95ABRAM150/BL	C	ABRAM 150	4	400	4000	Black	155	60	120	1/30	A+ A++ A
95ABRAM150/GR	C	ABRAM 150	4	400	4000	Grey	155	60	120	1/30	A+ A++ A
95ABRAM190/BL	C	ABRAM 190	8.5	900	4000	Black	195	60	120	1/30	A+ A++ A
95ABRAM190/GR	C	ABRAM 190	8.5	900	4000	Grey	195	60	120	1/30	A+ A++ A

Body material: Resin with clear glass | UV resistant | Lamp holder: R7s | Lamp included



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



GRF
96GRFLED005



GRF
96GRFLED0041
96GRFLED0031



GRF
96GRFLED010



GRF
96GRFLED0091



COOL
WHITE
6400K

IP65



GRF LED RECESSED FIXTURES

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Light angle	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
96GRFLED0031	C	1,5	55/32	6000-6500	30°	120	53	61	1/50	A++A
96GRFLED0091	C	1,5	75/42	6000-6500	30°	80	80	61	1/50	A++A
96GRFLED0041	C	3,5	187/165	6000-6500	30°	205	95	65	1/27	A++A
96GRFLED0005	F	1.5W*	30	6000-6500	110	45	54	1/50	1/27	A++A
96GRFLED010	F	2W*	35	6000-6500	105	105	57	1/50	1/27	A++A

Body: Stainless steel +Aluminium | Cable: 3G0.75mm2-10cm | Light source: SMD2835 | LED driver: mounted in the body
 Operating temperature: -20°C±+65°C

*Until Supply Last



Each of the models comes with additional decorative grid, shown in the picture.



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



GRF9617 LED
9617LEDW



GRF9617 LED
9619LEDW



GRF9617 LED
9618LEDW

GRF9617 LED


914

GARDEN



GRF9617 LED

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9617LEDW	C	3X3W	480	4000-4300	dark grey	44	138	143	1/24	A++>A
9618LEDW	C	3X3W	480	4000-4300	dark grey	44	138	143	1/24	A++>A
9619LEDW	C	2X3W	380	4000-4300	dark grey	44	138	143	1/24	A++>A

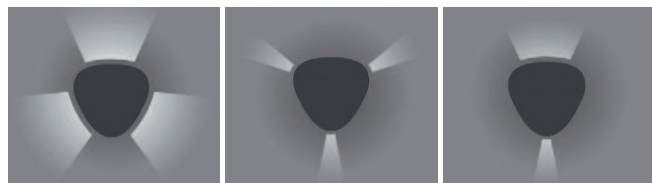

Body: aluminium | Diffuser: tempered glass | LED driver: mounted in the body | Light source: CREE LED
Operating temperature: -20°C/+65°C



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



WALL LAMP
95WL001/BL



WALL LAMP
95WL001/WH

GARDEN WALL LAMP E27

915

GARDEN

IP44



GARDEN WALL LAMP E27

Catalogue number	Product category	Description	Colour	Width (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
95WL001/BL	C	Wall lamp	Black	245	180	100	1 x E27	1/10	A++→E
95WL001/WH	C	Wall lamp	White	245	180	100	1 x E27	1/10	A++→E

Voltage: 220-240V AC | Lamps not included

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



**LED WALL LIGHT
ROUND IP54**
White / Black / Grey



**LED WALL LIGHT
SQUARE IP54**
White / Black / Grey



**LED WALL LIGHT
ROUNDED IP65**
White / Black / Grey




NEUTRAL
WHITE
4000K

IP54

IP65

LED WALL LIGHT

Catalogue number	Product category	Watt (W)	Type	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
969LED100R/WH	C	2X5W	Round	900	4000	white	130	110	100	1/12	A++A
969LED100R/BL	C	2X5W	Round	900	4000	black	130	110	100	1/12	A++A
969LED100R/GR	C	2X5W	Round	900	4000	grey	130	110	100	1/12	A++A
969LED100S/WH	C	2X5W	Square	900	4000	white	100	100	100	1/10	A++A
969LED100S/BL	C	2X5W	Square	900	4000	black	100	100	100	1/10	A++A
969LED100S/GR	C	2X5W	Square	900	4000	grey	100	100	100	1/10	A++A
969LEDW12/WH	C	2X6W	Rounded	1080	4000	white	175	28	90	1/40	A++A
969LEDW12/BL	C	2X6W	Rounded	1080	4000	black	175	28	90	1/40	A++A
969LEDW12/GR	C	2X6W	Rounded	1080	4000	grey	175	28	90	1/40	A++A

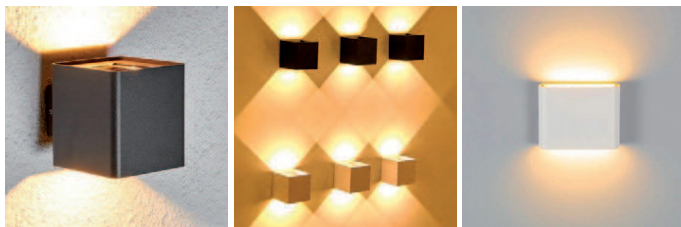

Body material: Aluminium | Diffuser: Glass | Light source 969led100: Epistar LED COB Light source 969LEDW12: Epistar SMD2835



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



TINA IP65
95TINA12/BL



LED WALL FIXTURE 6W IP65
96GRFLED05/GR



FRANCY IP66
95FRANCY/BL




FRANCY / GRF LED / TINA

Catalogue number BLACK body	Catalogue number WHITE body	Catalogue number GREY body	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length / diameter (mm)	Width (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
95FRANCY/BL	95FRANCY/WH		C	6	800	4000	300	85	130	1xE27	1/24	A+ A++A
96GRFLED05/DGR	96GRFLED05/WH	96GRFLED05/GR	C	6	480	4000	220	28	113		1/20	A++A
95TINA12/BL			C	12	1080	4000	230	72	105		1	A+ A++A

FANCY, TINA: Body material: Resin | UV resistant

GRF LED: Body material: ABS | Diffuser: PVC | Light source: 2835 SMD

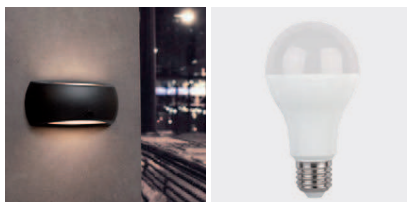

The product is accomplished with a LED bulb which parameters are noted in the chart. If you need any other color temperature or power, we suggest you to purchase the variants compatible to this fixtures separately as follows:

99LED583 LED PEAR A60 8W 2700K | 99LED584 LED PEAR A60 8W 6400K | 99LED794 LED PEAR A60 8W 6400K
99LED588 LED PEAR A60 12W 4000K | 99LED587 LED PEAR A60 12W 2700K | 99LED821 LED PEAR A60 12W 6400K

In case of insufficient quantity in stock of FRANCY IP66 the delivery time after order confirmation will be 45 days, and for others products 90 days.



BERTA
95BERTA/BL



STUCCHI
95STUCCHI/BL



LUCIA
95LUCIA/BL



UMBERTA
95UMBERTA/WH



IP66 Resin

BERTA / UMBERTA / LUCIA / STUCCHI

Catalogue number BLACK body	Catalogue number WHITE body	Product category	Description	Length / diameter (mm)	Width (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
95BERTA/BL	95BERTA/WH	C	BULKHEAD	275	80	275	1xE27	1/16	A⁺→E
95UMBERTA/BL	95UMBERTA/WH	C	BULKHEAD	350	94	350	2xE27	1/12	A⁺→E
95LUCIA/BL		C	BULKHEAD	300	175	255	1xE27	1/16	A⁺→E
95STUCCHI/BL	95STUCCHI/WH	C	BULKHEAD WITH BACKLIGHT	310	90	338	1xE27+ backlights	1/16	A⁺→E

Body material: Resin | UV resistant | Lamp not included



Recommended bulbs:

99LED583 LED PEAR A60 8W 2700K | 99LED584 LED PEAR A60 8W 6400K | 99LED794 LED PEAR A60 8W 6400K
99LED588 LED PEAR A60 12W 4000K | 99LED587 LED PEAR A60 12W 2700K | 99LED821 LED PEAR A60 12W 6400K



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



LUCIA EL
95LUCIAEL/BL

IP66 **Resin**



LUCIA EL

Catalogue number	Product category	Colour	Diameter (mm)	Width (mm)	Lampholder	Packing/Box (pcs)	Energy class
95LUCIAEL/BL	C	Black	300	90	1xE27	1/16	A++E
95LUCIAEL/GR	C	Grey	300	90	1xE27	1/16	A++E

Body: Resin with opal glass | UV resistant | Lamp not included



- Recommended bulbs:
- 99LED583 LED PEAR A60 8W 2700K
 - 99LED584 LED PEAR A60 8W 4000K
 - 9LED794 LED PEAR A60 8W 6400K
 - 99LED588 LED PEAR A60 12W 4000K
 - 99LED587 LED PEAR A60 12W 2700K
 - 99LED821 LED PEAR A60 12W 6400K



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



FRANCY OP IP66
95FRANCYOP/WH



BRLED ROUND
95BRLED6WH
95BRLED6BL
95BRLED12WH
95BRLED12BL



BRLED OVAL
95BELED6WH
95BELED6BL
95BELED12WH
95BELED12BL



BRLED / FRANCY OP

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	IP code	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95BRLED6WH	C	6	540	4000	white	54	170	170	100	1/24	A++A
95BRLED6BL	C	6	540	4000	black	54	170	170	100	1/24	A++A
95BRLED12WH	C	12	1080	4000	white	54	220	220	100	1/24	A++A
95BRLED12BL	C	12	1080	4000	black	54	220	220	100	1/24	A++A
95BELED6WH	C	6	540	4000	white	54	187	127	100	1/24	A++A
95BELED6BL	C	6	540	4000	black	54	187	127	100	1/24	A++A
95BELED12WH	C	12	1080	4000	white	54	239	162	100	1/24	A++A
95BELED12BL	C	12	1080	4000	black	54	239	162	100	1/24	A++A
95FRANCYOP/BL	C	empty			black	66	300	85	130	1/24	A++E
95FRANCYOP/WH	C	empty			white	66	300	85	130	1/24	A++E

BRLED: Body: polycarbonate | LED driver: mounted in the body | Light source: EPISTAR

FRANCY OP: Body material: Resin | UV resistant | Lamp not included



- Recommended bulbs:
- 99LED583 LED PEAR A60 8W 2700K
 - 99LED584 LED PEAR A60 8W 4000K
 - 9LED794 LED PEAR A60 8W 6400K
 - 99LED588 LED PEAR A60 12W 4000K
 - 99LED587 LED PEAR A60 12W 2700K
 - 99LED821 LED PEAR A60 12W 6400K



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



BRICE
95BRICE12LED



BRICE
95BRICE24LED

BRICE

921

GARDEN



BRICE

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	IP code	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95BRICE12LED	C	12	1080	4000	white	44	260	260	90	1/16	A++A
95BRICE24LED	C	24	2160	4000	white	44	380	380	110	1/10	A++A

Body: polycarbonate | LED driver: mounted in the body | Light source: EPISTAR



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED BULKHEAD LAMP
95BSLED6WH
95BSLED12WH



LED BULKHEAD LAMP
95BLN1540S/WH



LED BULKHEAD LAMP
95BLN1540/WH
95BLN2040/WH




LED BULKHEAD LAMP

Catalogue number	Product category	Watt (W)	Whole fixtures lumens (lm)	Colour temp. (K)	Colour of body	Length (mm)	Height (mm)	Width (mm)	Packing/Box (pcs)	Energy class
95BSLED6WH	F*	6	540	4500	white	172	71	116	116	A++A
95BSLED12WH	F*	12	1080	4500	white	220	78	143	143	A++A
95BL1540/WH	F*	15	1350	4000	white	190	59.5	190	1/40	A++A
95BL2440/WH	F*	24	2160	4000	white	230	64.5	230	1/20	A++A
95BL1540S/WH	F*	15	1350	4000	white	100	54.5	205	1/40	A++A
95BLN1540/WH	C	15	1350	4000	white	175	52	175	1/40	A++A
95BLN2040/WH	C	20	1800	4000	white	210	52	210	1/20	A++A
95BLN1540S/WH	C	15	1350	4000	white	200	46	98	1/40	A++A

Body: polycarbonate | LED driver: linear | C driver | Light source: 2835SMD | * Until Supply Last



ULTRA THIN

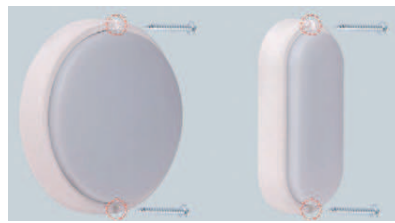

EASY INSTALLATION



BACK HIDDEN CABLE



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ARIA

91AT5201

91AT5202



LINIA4

91AT6126

91AT6127



LINIA1

91AT6117

91AT6119



SIRIUS

91AT1210

91AT1280

91AT1209

91AT1289



IP54

SIRIUS / ARIA / LINIA

Catalogue number	Product category	Model	Watt (W)	Colour	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
91AT1210	C	SIRIUS1	MAX 20W	white	230	-	110	1/21	A++C
91AT1280	F	SIRIUS1	MAX 20W	grey*	230	-	110	1/21	A++C
91AT1209	C	SIRIUS2	MAX 20W	white	280	-	115	1/14	A++C
91AT1289	F	SIRIUS2	MAX 20W	grey*	280	-	115	1/14	A++C
91AT5201	C	ARIA	MAX 23W	white	350	120	80	1/12	A++C
91AT5202	F	ARIA	MAX 23W	grey*	350	120	80	1/12	A++C
91AT6117	C	LINIA1	MAX 20W	white	320	137	110	1/26	A++C
91AT6119	F	LINIA1	MAX 20W	grey*	320	137	110	1/26	A++C
91AT6126	C	LINIA4	MAX 20W	white	320	200	110	1/18	A++C
91AT6127	F	LINIA4	MAX 20W	grey*	320	200	110	1/18	A++C

Body: polycarbonate (PC) | Diffuser: polycarbonate (PC)

*Until Supply Last



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



OL4023
914023/W



OL4023
914023/B

IP54



UNTIL SUPPLY
LAST

OL WATERPROOF FIXTURES

Catalogue number	Product category	Model	Watt (W)	Colour	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
914023/W	F	OL4023	MAX 20W	white	255	163	90	1/10	A++C
914023/B	F	OL4023	MAX 20W	black	255	163	90	1/10	A++C

Body: polycarbonate / metal | Diffuser: polycarbonate / glass





GRF
96GRF1482

IP65



GRF

Catalogue number	Product category	Width (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
96GRF1482	C	254	498.5	1482.6	1 x E27	1/2	A++ E

Body: aluminium, antique bronze



3+0 standard +extended **3** YEAR TOTAL WARRANTY



MARTA 90-1
96MARTA901L/BL



MARTA 90-2
96MARTA902L/BL



LED IP55 Resin

MARTA

Catalogue number	Product category	Description	Colour	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Diameter (mm)	Width (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
96MARTA901L/BL	C	Facade lighting	black	1x3.5	400	4000	92	80	170	1xGU10	1/36	A+ A++A
96MARTA901L/GR	C	Facade lighting	gray	1x3.5	400	4000	92	80	170	1xGU10	1/36	A+ A++A
96MARTA902L/BL	C	Facade lighting	black	2x3.5	800	4000	92	80	170	2xGU10	1/36	A+ A++A
96MARTA902L/GR	C	Facade lighting	gray	2x3.5	800	4000	92	80	170	2xGU10	1/36	A+ A++A

Body material: Resin | UV resistant | Lamp included | Lamp holder: GU10



The product is accomplished with a LED bulb which parameters are noted in the chart. If you need any other color temperature or power, we suggest you to purchase the variants compatible to this fixtures separately as follows:

99XLED727 GU10 LED SMD 3.5W 4000K | 99XLED728 GU10 LED SMD 3.5W 2700K | 99XLED731 GU10 LED SMD 3.5W 6400K
99LED729 GU10 LED SMD 6.5W 4000K | 99LED730 GU10 LED SMD 6.5W 2700K | 99LED796 GU10 LED SMD 6.5W 6400K



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



FRANCA 90
96FRANCA90/GR



FRANCA 90-1
96FRANCA901L/BL



FRANCA 90-2
96FRANCA902L/GR



IP55

Resin



FRANCA

Catalogue number	Product category	Description	Colour	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Diameter (mm)	Width (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
96FRANCA90/BL	C	Ceiling fixtures	black	3.5	400	4000	95		115	1xGU10	1/30	A+ A++A
96FRANCA90/GR	C	Ceiling fixtures	gray	3.5	400	4000	95		115	1xGU10	1/30	A+ A++A
96FRANCA901L/BL	C	Facade lighting	black	3.5	400	4000	95	110	128	1xGU10	1/30	A+ A++A
96FRANCA901L/GR	C	Facade lighting	gray	3.5	400	4000	95	110	128	1xGU10	1/30	A+ A++A
96FRANCA902L/BL	C	Facade lighting	black	2x3.5	800	4000	95	110	240	2xGU10	1/20	A+ A++A
96FRANCA902L/GR	C	Facade lighting	gray	2x3.5	800	4000	95	110	240	2xGU10	1/20	A+ A++A

Body material: Resin | UV resistant | Lamp included | Lamp holder: GU10



The product is accomplished with a LED bulb which parameters are noted in the chart. If you need any other color temperature or power, we suggest you to purchase the variants compatible to this fixtures separately as follows:

99XLED727 GU10 LED SMD 3.5W 4000K | 99XLED728 GU10 LED SMD 3.5W 2700K | 99XLED731 GU10 LED SMD 3.5W 6400K
99LED729 GU10 LED SMD 6.5W 4000K | 99LED730 GU10 LED SMD 6.5W 2700K | 99LED796 GU10 LED SMD 6.5W 6400K



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



LIVIA 160
 95LIVIA160/BL



LIVIA 160
 95LIVIA160/GR



LIVIA 160
 95LIVIA160/WH

LIVIA 160

928

FACADE AND GROUND


LED 3000 K 4000 K 6000 K **IP55** **Resin**



LIVIA 160

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95LIVIA160/BL	C	10	1200	3000/4000/6500- adjustable	Black	160	100	1/18	A+ A++A
95LIVIA160/GR	C	10	1200	3000/4000/6500- adjustable	Grey	160	100	1/18	A+ A++A
95LIVIA160/WH	C	10	1200	3000/4000/6500- adjustable	White	160	100	1/18	A+ A++A

Body: Resin with frosted glass | UV resistant | Lamp holder: GX53 | Lamp included

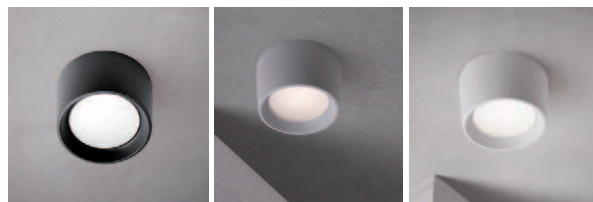

-230V 50/60 Hz 15mm² RoHS COMPLIANT F CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



OL9612-W1 LED
9612LEDW1



OL9611-W1 LED
9611LEDW1



OL9612-W2 LED
9612LEDW2




OL9611-W2 LED
9611LEDW2



OL9611 / OL9612

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9611LEDW1	C	3	210	4000-4300	dark grey	153	72.6	106.4	1/16	A++A
9611LEDW2	C	2X3W	320	4000-4300	dark grey	231.6	72.6	106.4	1/16	A++A
9612LEDW1	C	3	210	4000-4300	dark grey	170	92	65	1/12	A++A
9612LEDW2	C	2X3W	320	4000-4300	dark grey	200	92	65	1/12	A++A

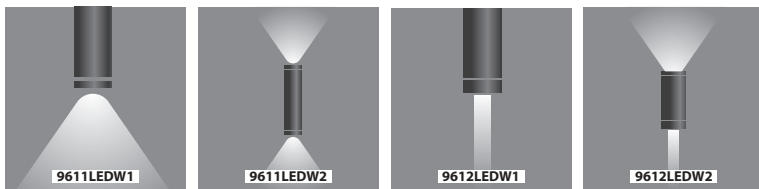

Body: aluminium | Diffuser: tempered glass | LED driver: mounted in the body | Light source: CREE LED
Operating temperature: -20°C/+65°C



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



GRF
 96GRF98C/AB



GRF
 96GRF76-1/AB

GRF98 / GRF76

930

FACADE AND GROUND

IP65



UNTIL SUPPLY
 LAST

GRF98 / GRF76


Catalogue number	Product category	Description	Voltage (V)	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Material	Packing/Box (pcs)	Energy class
96GRF98C/AB	F	Facade lighting	12	Antique bronze	98	-	41	1 x G4	Brass	1/24	A++→E
96GRF76-1/AB	F	Facade lighting	220-240	Antique bronze	76	60	76	1 x GU10	Brass	1/18	A++→E

Lamps not included





98LINEAR12

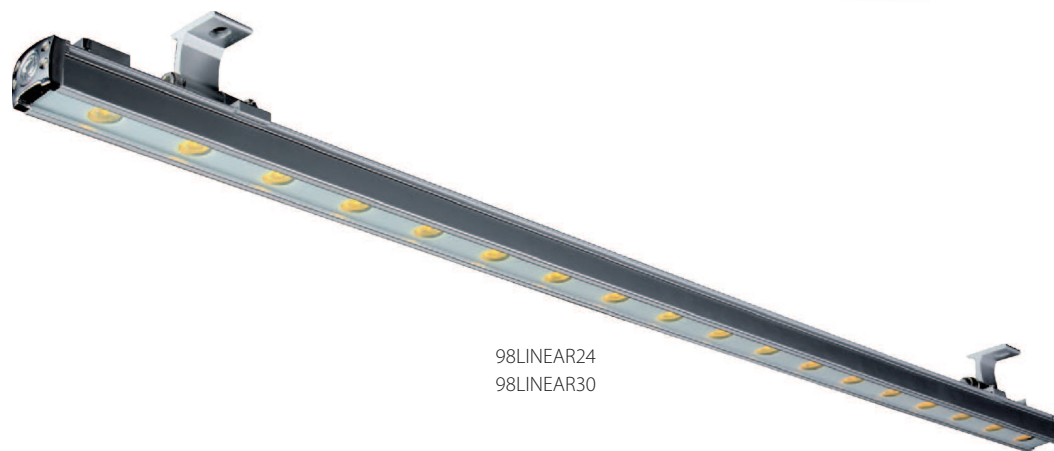

98LINEAR24
98LINEAR30



UNTIL SUPPLY
LAST

LINEAR

Catalogue number	Product category	Model	Watt (W)	Whole lamp lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98LINEAR12	F	LINEAR12	12	1080	4000		500	25	33	1/20	A++A
98LINEAR24	F	LINEAR24	24	2160	4000		1000	25	33	1/15	A++A
98LINEAR30	F	LINEAR30	30	2700	4000		1000	30	48	1/15	A++A

Body: aluminium casting | Light source: SMD2835 | Input voltage: LinearRGB DC24V; Linear 4000K: 220-240V | Rubber cable 300mm





STREAM STELLAR

Catalogue number	Product category	Model	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98STREAM9	C	STREAM9	9	720	5500	grey	300	50	56	1/9	A++A
98STREAM18	C	STREAM18	18	1440	5500	grey	600	50	56	1/9	A++A
98STREAM36	C	STREAM36	36	2880	5500	grey	1000	50	56	1/9	A++A
98STREAM9RGB	C	STREAM9 RGB	9	-	RGB	grey	300	50	56	1/9	A++A
98STREAM18RGB	C	STREAM18 RGB	18	-	RGB	grey	500	55	60	1/9	A++A
98STREAM36RGB	C	STREAM36 RGB	36	-	RGB	grey	1000	50	56	1/9	A++A

Body: aluminium casting | LED driver: mounted in the body | Light source: Epistar | Ambient Temperature: -25°C+ +55°C



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SOLAR LED WALL LIGHTS
WITH SENSOR
98SOL200



SOLAR LED WALL LIGHTS
WITH SENSOR
98SOL201


LED **IP54** **Solar**



SOLAR LED WALL LIGHTS WITH SENSOR

Catalogue number	Product category	LED QTY	Power (W)	Whole fixtures lumens (lm)	Solar panel (Wp)	Sensor range (m)	Colour of body	Length (mm)	Height (mm)	Width (mm)	Packing/Box (pcs)	Energy class
98SOL200	C	14 (FRONT 14+BACK 2PCS)	7	200	0.7- POLY CRISTALLINE	6	white	144.5	96	79	1	A++A
98SOL201	C	17 (FRONT 16+BACK 1PCS)	10	240	0.7- POLY CRISTALLINE	6	white	200	105	90	1	A++A

Material: ABS + PC, anti UV and glossy | **LED&Lens:** LM-80 LEDs 2835SMD; high transmittance PC optical lens | **Detection angle:** 120° | **Installation height:** ≤ 4meters | **Battery:** 3.7V/ 1200mAh
98SOL200 Auto on at night; Full brightnessby motion activated. Weak brightness when no motion | **Time delay:** 10 sek | **Modes:** A- Full brightness+Weak brightness (front and back lights ON); B- Full brightness+Weak brightness (front light OFF, back lights ON) | Auto on at night; Full brightnes
98SOL201 Auto on at night; Full brightnessby motion activated. Weak brightness when no motion | **Time delay:** 10 sek | **Battery >30%:** Full brightness+Weak brightness (front and back lights ON); **Battery <30%:** Full brightness+Weak brightness (front light OFF, back lights ON) | Auto on at night; Full brightnes

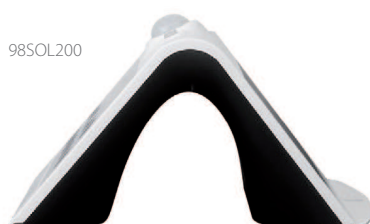

SMD **2+0** standard +extended **2** YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

SOLAR LED WALL LIGHTS WITH SENSOR

933

FACADE AND GROUND



SOLAR FIXTURE SOL WITH SENSOR
98SOL300



SOLAR FIXTURE SOL WITH SENSOR
98SOL302



SOLAR FIXTURE SOL WITH SENSOR
98SOL301

SOLAR LED FLOOD LIGHT WITH SENSOR

934

FACADE AND GROUND

LED **IP65** **Solar**



SOLAR LED FLOOD LIGHT WITH SENSOR

Catalogue number	Product category	LED QTY	Power (W)	Whole fixture lumens (lm)	Battery (V/mAh)	Sensor range (m)	Colour body	Length (mm)	Height (mm)	Width (mm)	Packing/Box (pcs)	Energy class
98SOL300	C	30	30	500	3.7V/ 2X1500mAh	6	black	217.4	149.3	33.7	1	A++A
98SOL301	C	72	50	1080	3.7V/7200mAh	6	black	300	215	35	1	A++A
98SOL302	C	55	50	1100	3.7V/ 7200mAh	6	black	-	165	35	1	A++A

Material: ABS + PC, anti UV and glossy | 3working mode | 98SOL302: Portable solar panel.Can use as portable power bank



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SOLAR FIXTURE SOL WITH SENSOR
98SOL45

LED **IP64** **Solar**



UNTIL SUPPLY
LAST

SOLAR FIXTURE SOL WITH SENSOR

Catalogue number	Product category	LED QTY	Whole fixture lumens (lm)	Solar panel (V/mA)	Battery (V/mAh)	Sensor range (m)	Colour body	IP Rating	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98SOL45	F	45	250	5.5V 160mA	3.7V 2200mAh	6-8	black	64	190	183	53	1/60	A++A



98SOL36



98SOL36

Body: ABS | Charging time: 8 hours | Working time: 2000 times

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



GRF
 96GRF190A/AB



GRF
 96GRF190B/AB

GRF

936

FACADE AND GROUND

IP68



UNTIL SUPPLY
 LAST

GRF

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Height (mm)	Lampholder	Material	Packing/Box (pcs)	Energy class
96GRF190A/AB	F	Ground recessed fixtures	Antique bronze	98	190	1 x GU5.3	Composite material	1/12	A++→E
96GRF190B/AB	F	Ground recessed fixtures	Antique bronze	98	190	1 x GU5.3	Composite material	1/12	A++→E

Lamps not included. The fixtures are with 6m cable.





UNDERWATER LED
98LED012SW



UNDERWATER LED
98LED007SW



UNDERWATER LED
98LED003SW



LED IP68

UNDERWATER LED LIGHTS, IP68

Catalogue number	Product category	Voltage (V)	Watt (W)	Whole lamp lumens (lm)	Colour temp. (K)	Colour body	Packing/Box (pcs)	Energy class
98LED003SW	C	12V AC	3 X 1	150	4000	silver	1/30	A++A
98LED007SW	C	12V AC	7 X 1	350	4000	silver	1/1	A++A
98LED012SW	C	24V AC	12 X 1	600	4000	silver	1/1	A++A
98LED006RGB	C	12V AC	6 X 1	-	RGB	silver	1/1	A++A



Body: Stainless steel | Light source: Epistar | Beam angle: 90° | without driver

3+2 standard+extended
5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MINI TOMMY ELSP
 96TOMMYELSP/BL



MINI TOMMY EL
 96TOMMYEL/BL



IP66 Resin

MINI TOMMY EL / MINI TOMMY ELSP

Catalogue number	Product category	Description	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour	Diameter (mm)	Width (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
96TOMMYEL/BL	C	GROUND/WALL FIXTURE	3.5	400	4000	black	122	118	127	1xGU10	1/30	A++A
96TOMMYEL/GR	C	GROUND/WALL FIXTURE	3.5	400	4000	gray	122	118	127	1xGU10	1/30	A++A
96TOMMYELSP/BL	C	SPIKE GROUND FIXTURE	3.5	400	4000	black	122	118	310	1xGU10	1/30	A++A
96TOMMYELSP/GR	C	SPIKE GROUND FIXTURE	3.5	400	4000	gray	122	118	310	1xGU10	1/30	A++A

Body material: Resin | UV resistant | Lamp not included | Fully adjustable position | Lamp holder: GU10



The product is accomplished with a LED bulb which parameters are noted in the chart. If you need any other color temperature or power, we suggest you to purchase the variants compatible to this fixtures separately as follows:

99LED729 GU 10 LED SMD 6.5W 4000K | 99LED730 GU 10 LED SMD 6.5W 2700K | 99LED796 GU 10 LED SMD 6.5W 6400K
 99LED733 GU 10 LED SMD RED | 99LED734 GU 10 LED SMD BLUE | 99LED735 GU 10 LED SMD GREEN



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



GRF 9615 LED
9615LEDP



GRF 9616 LED
9616LEDW



GRF 9617 LED
9617LEDP



GRF 9615 / 9616 / 9617

Catalogue number	Product category	Watt (W)	Body	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9615LEDP	C	3	aluminium	210	4000-4300	dark grey	279	73	112	1/16	A++A
9616LEDW	C	3	aluminium	210	4000-4300	dark grey		73	110	1/16	A++A
9617LEDP	C	5	PP+PC	360	5500-6000	dark grey	265	25	130	1/16	A++A

Diffuser: tempered glass | LED driver: mounted in the body | Operating temperature: -20°C+65°C



Terminal box IP44



Terminal box IP65



Cable connector IP68



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



GRF
96GRF187/CU



GRF
96GRF457LSP/AB



GRF
96GRF76B/AB



GRF
96GRF70B/AB

GRF

940

FACADE AND GROUND



UNTIL SUPPLY
LAST

IP65

GRF

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Height (mm)	Lampholder	Material	Packing/Box (pcs)	Energy class
96GRF187/CU	F	Ground recessed fixtures	Copper	54	187	1 x GU10	Copper	1/12	A++ E



UNTIL SUPPLY
LAST

GRF

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Height (mm)	Material	Packing/Box (pcs)
96GRF70B/AB	F	Connector for wall recessed fixtures	Antique bronze	70	28	Brass	1/50
96GRF76B/AB	F	connector for pole D50-70 mm	Antique bronze	76	73	Brass	1/60
96GRF457LSP/AB	F	riser type for ground recessed fixtures	Antique bronze	25	457	Brass	1/30



SOLAR TORCH LIGHT
98SOL96



WARM
WHITE
2700K

IP54

Solar



SOLAR TORCH LIGHT

Catalogue number	Product category	LED qty	Power (W)	Colour temp. (K)	Whole fixture lumens (lm)	Solar panel (V/mA)	Battery (V/mAh)	Colour body	Diameter (mm)	Length (mm)	Packing/Box (pcs)	Energy class
98SOL96	C	51	max 1W	1500-1800	20	5.5V/0.66W	3.7V/1200mAh	black	120	770	1/10	A++A

Material: ABS+PC | Charge time (h): 8h | Working Time: 8h | Light source: 2835 | Mode: Dark On>Off | Beam angle: 360° | Battery: Included



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SOLAR GROUND LIGHT
98SOL5420



SOLAR GROUND LIGHT
98SOL5520



SOLAR GROUND LIGHT
98SOL9620



SOLAR GROUND LIGHT
98SOL23310

SOLAR GROUND LIGHT

942

FACADE AND GROUND

LED **IP44** **Solar**



SOLAR GROUND LIGHT

Catalogue number	Product category	Power (W)	Whole fixture lumens (lm)	Solar panel	Battery (V/mAh)	Working time	Material	Colour body	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
98SOL5420	C	0,06	1	amorphous	Ni-Mh/100mAh AA 1.2V	8h	plastic	black	370	75/75	1/12	A++A
98SOL5520	C	0,06	1	amorphous	Ni-Mh/100mAh AAA 1.2V	8h	plastic	black	365	85/85	9/8	A++A
98SOL9620	C	0,06	1	amorphous	Ni-Mh/100mAh AAA 1.2V	8h	plastic	black	380	64	1/24	A++A
98SOL23310	C	0,08	2	amorphous	Ni-Mh AAA 2V	8h	plastic	black	373	57/57	1/24	A++A

RoHS **CE** **1+0** standard +extended **1** YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SOLAR GROUND LIGHT
98SOL4320



SOLAR GROUND LIGHT
98SOL8120



SOLAR GROUND LIGHT
98SOL5821

SOLAR GROUND LIGHT

943

FACADE AND GROUND



IP44

Solar



SOLAR GROUND LIGHT

Catalogue number	Product category	Power (W)	Whole fixture lumens (lm)	Solar panel	Battery (V/mAh)	Working time	Material	Colour body	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
98SOL4320	C	0,5	15	polycrystal	NI-MH AA 300mAh 1.2V	8h	plastic	black	425	130/110	1/12	A++A
98SOL8120	C	0,06	1	amorphous	Ni-Mh/40mAh button battery 1.2V	8h	plastic	black	340	100	1/16	A++A
98SOL5821	C	0,24	4	amorphous	Ni-Mh/200mAh AA 1.2V	8h	plastic	silver	510	200	1/8	A++A



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SOLAR GROUND LIGHT
98SOL9621



SOLAR GROUND LIGHT
98SOL3122



SOLAR GROUND LIGHT
98SOL6721



SOLAR GROUND LIGHT
98SOL6921

SOLAR GROUND LIGHT

944

FACADE AND GROUND

LED **IP44** **Solar**



SOLAR GROUND LIGHT


Catalogue number	Product category	Power (W)	Whole fixture lumens (lm)	Solar panel	Battery (V/mAh)	Working time	Material	Colour body	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
98SOL9621	C	0,5	6	amorphous	Ni-Mh/300mAh AA 1.2V	8h	stainless steel+glass	silver	430	140	1/12	A++A
98SOL3122	C	0,06	1	amorphous	Ni-Mh/100mAh AAA 1.2V	8h	stainless steel+plastic	brass	390	85	4/12	A++A
98SOL6721	C	0,06	1	amorphous	Ni-Mh/200mAh AA 1.2V	8h	stainless steel+plastic	silver	370	128	1/6	A++A
98SOL6921	C	0,06	1	amorphous	Ni-Mh/100mAh AAA 1.2V	8h	stainless steel + plastic	black	355	72	1/12	A++A

RoHS **CE** **1+0** standard +extended **1** YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SOLAR WALL
98SOL23423

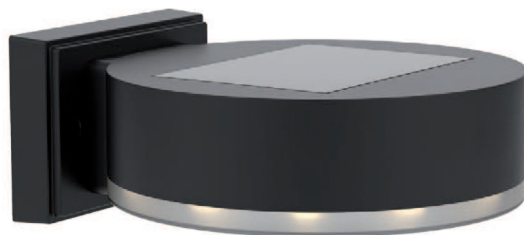

SOLAR WALL
98SOL23428



DRIVEWAY LIGHTS
98SOL41029




IP44

Solar



SOLAR WALL & DRIVEWAY LIGHTS

Catalogue number	Product category	Power (W)	Whole fixture lumens (lm)	Solar panel	Battery (V/mAh)	Working time	Material	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98SOL23423	C	0,8	30	mono	LiFePO4/800mAh 18500 4.5V	8h	plastic	black	100	100	100	1/24	A++A
98SOL23428	C	0,3	10	mono	Ni-Mh/ 900mAh 2V	8h	plastic	black	145	145	55	1/24	A++A
98SOL41029	C	0,24	6	poly	Ni-Mh/ 600mAh	8h	aluminium	grey	69	26	100	1/24	A++A



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SOLAR WALL
98SOL11128W



PATHWAY LIGHTS
98SOL11128



SOLAR WALL & PATHWAY LIGHTS

Catalogue number	Product category	Power (W)	Whole fixture lumens (lm)	Solar panel	Battery (V/mAh)	Working time	Material	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98SOL11128	C	0,32	10	mono	Ni-Mh AA battery	8h	metal & glass	black	127	127	456	1/24	A++>A
98SOL11128W	C	0,32	10	mono	Ni-Mh AA battery	8h	metal & glass	black	108	108	203	1/24	A++>A



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ALDO 2L
96ALDO2L/GR



ALDO
96ALDO/BL



NEUTRAL
WHITE
4000K

IP67

Resin



ALDO

Catalogue number	Product category	Model	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Diameter 1 (mm)	Beam angle	Packing/Box (pcs)	Energy class
96ALDO/BL	C	ALDO	1.7	170	4000	Black	50	47	110	1/50	A++A
96ALDO/GR	C	ALDO	1.7	170	4000	Grey	50	47	110	1/50	A++A
96ALDO2L/BL	C	ALDO 2L	1.7	170	4000	Black	50	47	110	1/50	A++A
96ALDO2L/GR	C	ALDO 2L	1.7	170	4000	Grey	50	47	110	1/50	A++A

Body: Resin with opal glass | UV resistant | Lamp holder: G9 | Lamp included



The product ALDO is accomplished with a LED bulb which parameters are noted in the chart. If you need any other color temperature or power, we suggest you to purchase the variants compatible to this fixtures separately as follows:

99LED933 G9 LED 7W 3000K | 99LED933W G9 LED 7W 4000K | 99LED933CW G9 LED 7W 6400K



In case of insufficient quantity in stock of 96GRFLED068 the delivery time after order confirmation will be 90 days, and for others products 45 days.



CECI 90 3L
96CECI3L/BL



CECI 90
96CECI90/GR



GRF
96GRFLED068



GRF068 / CECI RESIN

Catalogue number	Product category	Model	Colour	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Diameter (mm)	Height (mm)	Beam angle	Packing/Box (pcs)	Energy class
96CECI90/BL	C	CECI 90	Black	3.5	400	4000	95	115	45°	1/40	A++A
96CECI90/GR	C	CECI 90	Gray	3.5	400	4000	95	115	45°	1/40	A++A
96CECI3L/BL	C	CECI 90 3L	Black	3.5	400	4000	95	115	45°	1/40	A++A
96CECI3L/GR	C	CECI 90 3L	Gray	3.5	400	4000	95	115	45°	1/40	A++A
96GRFLED068	C	GRF	Gray	1	60	6000-6500	100	61	45°	1/40	A++A

GRF067: Material: 304 Stainless steel | Voltage: 100-240V | LED source: Integrated SMD Epistar | IK10 | Corrosion proof

CECI: Material: Resin | UV resistant | Lamp included | Lamp holder: GU10



The product CECI 90 and CECI 90 3L are accomplished with a LED bulb which parameters are noted in the chart. If you need any other color temperature or power, we suggest you to purchase the variants compatible to this fixtures separately as follows:

99LED729 GU 10 LED SMD 6.5W 4000K | 99LED730 GU 10 LED SMD 6.5W 2700K | 99LED796 GU 10 LED SMD 6.5W 6400K

99LED733 GU 10 LED SMD RED | 99LED734 GU 10 LED SMD BLUE | 99LED735 GU 10 LED SMD GREEN



In case of insufficient quantity in stock of 96GRFLED068 the delivery time after order confirmation will be 90 days, and for others products 45 days.



GRF109 IP67



GRF 102 IP67

96GRF102/AB



UNTIL SUPPLY
LAST

IP67

EMPTY FIXTURE GRF, IP67

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Height (mm)	Lampholder	Material	Packing/Box (pcs)	Energy class
96GRF102/AB	F	Ground recessed fixtures	Antique bronze	102	137	1 x GU5.3	Casting brass flat over and composite material body with PVC embedded part	1/18	A++→E

Load capacity is 3 ton



EMPTY FIXTURE GRF, IP67

949



UNTIL SUPPLY
LAST

IP67

EMPTY FIXTURE GRF 109, IP67

Catalogue number	Product category	Watt (W)	Voltage (V)	Lamp	Colour	Current (A)	Balast	Diameter (mm)	Length (mm)	Height (mm)	Energy class
96GRF109/70	F		230	MHL	satin nickel		empty	260	280	185	A++→E
96GRF109/150	F		230	MHL	satin nickel		empty	260	280	185	A++→E

Body: PVC | Diffuser: aluminium ring and tempered glass | Lamp not included
Load capacity is 3 ton. | w/o driver



FACADE AND GROUND



GRF105 IP65
96GRF105



GRF106 IP65
96GRF106

EMPTY FIXTURE GRF, IP65

950

FACADE AND GROUND

IP65



EMPTY FIXTURE GRF, IP65

Catalogue number	Product category	Watt (W)	Voltage (V)	Lamp holder	Colour	Diameter (mm)	Length (mm)	Packing/Box (pcs)	Energy class
96GRF105	F	max.50W	12	1 x GU5.3	satın nickel	107	145	1/20	A++A
96GRF106	F	max.50W	220	1 x GU10	satın nickel	107	145	1/20	A++A

Body: PVC | Diffuser: aluminium ring and tempered glass | Lamp not included
Load capacity is 3 ton. | w/o driver



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



RAY
96RAY40



RAY
96RAY30



RAY
96RAY20



RAY
96RAY10




RAY

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour aluminium ring	Diameter (mm)	Diameter 1 (mm)	Length (mm)	Packing/Box (pcs)	Energy class
96RAY10	C	10	900	5500	satın nickel	160	150	100	1/12	A++A
96RAY20	C	20	1800	5500	satın nickel	180	160	123	1/8	A++A
96RAY30	C	30	2700	5500	satın nickel	230	210	135	1/6	A++A
96RAY40	C	40	3600	5500	satın nickel	230	215	135	1/6	A++A

Body: aluminium | Diffuser: aluminium ring and tempered glass | Load capacity is 2.5 ton | LED driver: mounted in the body
Light source: Epistar LED



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

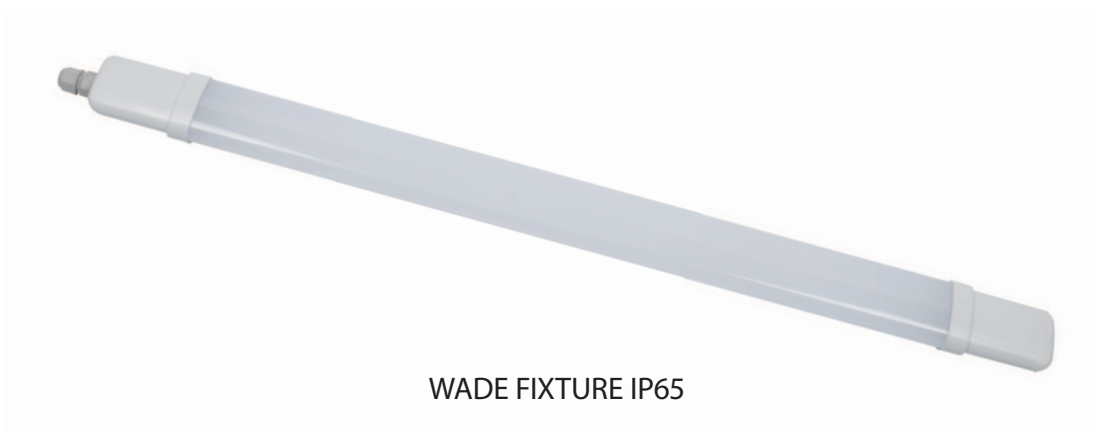

WADE FIXTURE IP65

952

LUMINAIRES



WADE FIXTURE IP65

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9WF18CW	C	18	1600	6500	white	700	55	35	1/20	A++>A
9WF36CW	C	36	3500	6500	white	1230	55	35	1/12	A++>A
9WF45CW	C	45	4300	6500	white	1530	53	35	1/12	A++>A

Body: polycarbonate (PC) | Diffuser: polycarbonate (PC) | Clamps: inox | Light source: Sanan 2835 SMD | Power factor: $\lambda > 0.9$ | Starting time: <1s | Beam angle: 120°
Cable gland, metal clips for wall fixing.



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



BELLA STELLAR SMD2835



BELLA STELLAR SMD2835

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9XBR18LED	C	18	1620	4000	Grey	610	75	62	1/8	A++A
9XBR18LEDCW	C	18	1620	6500	Grey	610	75	62	1/8	A++A
9XBR36LED	C	36	3240	4000	Grey	1210	75	62	1/8	A++A
9XBR36LEDCW	C	36	3240	6500	Grey	1210	75	62	1/8	A++A
9XBR54LED	C	54	4860	4000	Grey	1510	75	62	1/8	A++A
9XBR54LEDCW	C	54	4860	6500	Grey	1510	75	62	1/8	A++A



Body: PC | Diffuser: PC Opal | Clips: polycarbonate | Cable gland, metal clips for wall fixing | Light source: Sanan 2835SMD



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



BELLA SMD2835

BELLA LUMINAIRE SMD2835



BELLA LUMINAIRE SMD2835

Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9BR20LED	-	C	20	1800	4000	grey	600	80	70	1/16	A++A
9BR20LEDCW	-	C	20	1800	6500	grey	600	80	70	1/16	A++A
9BR40LED	9BR40LEDE	C	40	4400	4000	grey	1200	80	70	1/12	A++A
9BR40LEDCW	9BR40LEDCWE	C	40	4400	6500	grey	1200	80	70	1/12	A++A
9BR55LED	9BR55LEDE	C	55	5000	4000	grey	1476	80	70	1/9	A++A
9BR55LEDCW	9BR55LEDCWE	C	55	5000	6500	grey	1476	80	70	1/9	A++A



Emergency kit with a possibility for work in an emergency regime more than two hours.

Body: polycarbonate (PC) | Diffuser: polycarbonate (PC) | Reflector: steel white | Light source: Epistar | Clips: INOX
Cable gland, metal clips for wall fixing.



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



BELLA with LED Tubes T8 STELLAR



BELLA with LED Tubes T8 STELLAR

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9BR109LEDCW	C	1X9	585	6200-6500	grey	655	68	58	1/8	A+ A++A
9BR109LED	C	1X9	585	4000-4300	grey	655	68	58	1/8	A+ A++A
9BR209LEDCW	C	2X9	1170	6200-6500	grey	655	113	58	1/6	A+ A++A
9BR209LED	C	2X9	1170	4000-4300	grey	655	113	58	1/6	A+ A++A
9BR118LEDCW	C	1X18	1170	6200-6500	grey	1270	68	58	1/8	A+ A++A
9BR118LED	C	1X18	1170	4000-4300	grey	1270	68	58	1/8	A+ A++A
9BR218LEDCW	C	2X18	2340	6200-6500	grey	1270	113	58	1/8	A+ A++A
9BR218LED	C	2X18	2340	4000-4300	grey	1270	113	58	1/8	A+ A++A
9BR122LEDCW	C	1X24	1430	6200-6500	grey	1565	68	58	1/8	A+ A++A
9BR122LED	C	1X24	1430	4000-4300	grey	1565	68	58	1/8	A+ A++A
9BR222LEDCW	C	2X24	2860	6200-6500	grey	1565	113	58	1/6	A+ A++A
9BR222LED	C	2X24	2860	4000-4300	grey	1565	113	58	1/6	A+ A++A

with LED tubes STELLAR



Body: ABC | Diffuser: polycarbonate (PC) | Reflector: without | Clips: polycarbonate | Cable gland, metal clips for wall fixing. | Light source: LED tubes



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.




BELLA with LED Tubes T8 ELMARK

Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9BM110LEDCW	-	C	1X10	800	6500	grey	670	86	100	1/12	A+ A++ A
9BM110LED	-	C	1X10	800	4000	grey	670	86	100	1/12	A+ A++ A
9BM118LEDCW	-	C	1X18	1440	6500	grey	1270	86	100	1/9	A+ A++ A
9BM118LED	-	C	1X18	1440	4000	grey	1270	86	100	1/9	A+ A++ A
9BM124LEDCW	-	C	1X24	1920	6500	grey	1570	106	110	1/6	A+ A++ A
9BM124LED	-	C	1X24	1920	4000	grey	1570	106	110	1/6	A+ A++ A
9BM210LEDCW	-	C	2X10	1600	6500	grey	670	131	100	1/9	A+ A++ A
9BM210LED	-	C	2X10	1600	4000	grey	670	131	100	1/9	A+ A++ A
9BM218LEDCW	9BM218LEDCWE	C	2X18	2880	6500	grey	1270	131	100	1/6	A+ A++ A
9BM218LED	9BM218LEDE	C	2X18	2880	4000	grey	1270	131	100	1/6	A+ A++ A
9BM224LEDCW	9BM224LEDCWE	C	2X24	3840	6500	grey	1570	166	110	1/4	A+ A++ A
9BM224LED	9BM224LEDE	C	2X24	3840	4000	grey	1570	166	110	1/4	A+ A++ A

with LED tubes ELMARK



We offer the fixtures as per personal request with a fixed block and battery with a possibility for work in an emergency regime 60-180min



Wire and fittings for hanging mounting 2,5m
2 pcs/ pack
92ACC03

Body: polycarbonate (PC) | Diffuser: polycarbonate (PC) | Reflector: steel white | Ballast: fixed inside the body | Clamps: polycarbonate | Cable gland, metal clips for wall fixing.



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



UNTIL SUPPLY
LAST

BELLA luminaire with LED tubes T5 ELMARK

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9BE114LEDW	F	1X10	1000	4000	grey	670	74	80	1/12	A+ A++A
9BE128LEDW	F	1X20	2000	4000	grey	1210	64	85	1/9	A+ A++A
9BE214LEDW	F	2X10	2000	4000	grey	670	106	80	1/9	A+ A++A
9BE114LEDCW	F	1X10	1000	6400	grey	670	74	80	1/12	A+ A++A
9BE128LEDCW	F	1X20	2000	6400	grey	1210	64	85	1/9	A+ A++A
9BE214LEDCW	F	2X10	2000	6400	grey	670	106	80	1/9	A+ A++A

with LED tubes ELMARK



Body: polycarbonate (PC) | Diffuser: polycarbonate (PC) | Reflector: steel white | Clamps: inox | Cable gland, metal clips for wall fixing.





IP65

EMPTY FIXTURES BELLA FOR SINGLE ENDED LED TUBES T8

Catalogue number	Product category	Led tube size	Colour	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
89084	C	1x600mm	grey	670	86	100	1/12	A++B
89085	C	2x600mm	grey	670	131	100	1/9	A++B
89086	C	1x1200mm	grey	1270	86	100	1/9	A++B
89087	C	2x1200mm	grey	1270	131	100	1/6	A++B
89088	C	1x1500mm	grey	1570	86	100	1/6	A++B
89089	C	2x1500mm	grey	1570	131	100	1/4	A++B



Body: polycarbonate (PC) | Diffuser: polycarbonate (PC) | Reflector: steel white | Clips: polycarbonate | Cable gland, metal clips for wall fixing. | Lamp not included



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



HELIOS SMD

Catalogue number	Product category	Model	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98HELIOS10/WH	C	HELIOS10	10	800	4000	white	105	25	85	1/50	A++A
98HELIOS20/WH	C	HELIOS20	20	1600	4000	white	128	25	88	1/50	A++A
98HELIOS30/WH	C	HELIOS30	30	2400	4000	white	153	25	111	1/30	A++A
98HELIOS50/WH	C	HELIOS50	50	4000	4000	white	205	30	160	1/20	A++A
98HELIOS100/WH	C	HELIOS100	100	8000	4000	white	300	30	205	1/10	A++A

Body: Aluminium casting | LED driver: mounted in the body | Light source: Epistar SMD2835 | Input voltage: 176 - 264V | Ambient Temperature: -20°C÷ +55°C



Side View



Terminal box IP44

Material: PC
Voltage: 450V
Rated current: 6A
Wiring Capacity: 0.5-4.0mm²

Cat. Number: 31071



Terminal box IP65

Material: Polypropylene 94-V2 grade
Sunscreen Rating: Sun Protection(UV)
Voltage: 450V
Rated current: 10A
Terminal Blocks: 3p screw type
Metal Part: Plated Brass/Steel Spring
Wiring Capacity: 0.5-2.5mm²

Cat. Number: 31070



Cable connector IP68

Rated operational voltage: AC250V
Rated operational Amper(A): ≤30A
Material: flame retardant/Anti UV nylon(PA66)
Crimping terminals: Nickel-plated brass
Withstand voltage(normal temperature): 3KV
Operating temperature range: -40°C~+105°C
Wiring Capacity: 0.5-2.5mm²

Cat. Number: 31072




In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



HELIOS SMD

Catalogue number	Product category	Model	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98HELIOS10	C	HELIOS10	10	800	5000-5500	black	105	25	85	1/40	A++A
98HELIOS20	C	HELIOS20	20	1600	5000-5500	black	128	25	88	1/40	A++A
98HELIOS30	C	HELIOS30	30	2400	5000-5500	black	153	25	111	1/20	A++A
98HELIOS50	C	HELIOS50	50	4000	5000-5500	black	205	30	160	1/20	A++A
98HELIOS100	C	HELIOS100	100	8000	5000-5500	black	300	30	205	1/10	A++A
98HELIOS150	C	HELIOS150	150	10000	5000-5500	black	333	40	254	1/10	A++A
98HELIOS200	C	HELIOS200	200	12000	5000-5500	black	360	42	280	1/10	A++A
98HELIOS20SEN	C	HELIOS20SEN	20	1600	5000-5500	black	134	35	109	1/20	A++A
98HELIOS30SEN	C	HELIOS30SEN	30	2400	5000-5500	black	173	35	136	1/10	A++A
98HELIOS50SEN	C	HELIOS50SEN	50	4000	5000-5500	black	210	35	163	1/10	A++A

Body: Aluminium casting | LED driver: mounted in the body | Light source: Epistar SMD2835 | Input voltage: 176 - 264V | Ambient Temperature: -20°C+ +55°C
 Sensor: detection range:120° | Detection distance: MAX 8 m(±2 m) | Time setting: 140±20 s | Ambient light: 25±10 lux

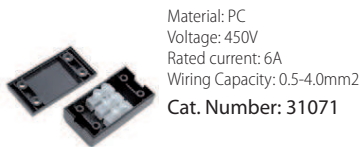

Terminal box IP44



Terminal box IP65



Cable connector IP68



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



VEGA SLIM

- 98VEGA10SLIM
- 98VEGA20SLIM
- 98VEGA30SLIM
- 98VEGA50SLIM
- 98VEGA100SLIM



VEGA SLIM WITH SENSOR

- 98VEGA10SENSLIM
- 98VEGA20SENSLIM
- 98VEGA30SENSLIM
- 98VEGA50SENSLIM



VEGA SLIM / VEGA SLIM WITH SENSOR

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98VEGA10SLIM	C	10	900	5500	black	102	24	83	1/40	A+ A++A
98VEGA20SLIM	C	20	1800	5500	black	131	26	117	1/40	A+ A++A
98VEGA30SLIM	C	30	2700	5500	black	215	30	185	1/20	A+ A++A
98VEGA50SLIM	C	50	4500	5500	black	230	30	195	1/20	A+ A++A
98VEGA100SLIM	C	100	9000	5500	black	327	42	265	1/10	A+ A++A
98VEGA10SENSLIM	C	10	900	5500	black	102	50	153	1/50	A+ A++A
98VEGA20SENSLIM	C	20	1800	5500	black	134	34	98	1/30	A+ A++A
98VEGA30SENSLIM	C	30	2700	5500	black	215	30	185	1/20	A+ A++A
98VEGA50SENSLIM	C	50	4500	5500	black	230	30	195	1/10	A+ A++A

Body: Plastic+Aluminium | LED driver: linear | Light source: SANAN | Input voltage: 220V-240V AC | Cable length: 300 mm | Ambient Temperature: -30°C+ +65°C
 Sensor: | Detection Range:110° | Detection Distance: MAX 8m(adjustable) | Ambient Light: 2-1000 lux (adjustable) | Detection Motion Speed: 0.6-1.5m/s;



Terminal box IP44



Terminal box IP65

Material: Polypropylene 94-V2 grade
 Sunscreen Rating:Sun Protection(UV)
 Voltage: 450V
 Rated current: 10A
 Terminal Blocks: 3p screw type
 Metal Part:Plated Brass/Steel Spring
 Wiring Capacity: 0.5-2.5mm2

Cat. Number: 31070



Cable connector IP68

Rated operational voltage:AC250V
 Rated operational Ampere(A):≤30A
 Material: flame retardant/Anti UV nylon(PA66)
 Crimping terminals:Nickle-plated brass
 Withstand voltage(normal temperature):3KV
 Operating temperature range: -40°C~+105°C
 Wiring Capacity: 0.5-2.5mm2

Cat. Number: 31072



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



VEGA SLIM

- 98VEGA10SLIM/WH
- 98VEGA20SLIM/WH
- 98VEGA30SLIM/WH
- 98VEGA50SLIM/WH
- 98VEGA100SLIM/WH

VEGA SLIM / VEGA SLIM WITH SENSOR



VEGA SLIM / VEGA SLIM WITH SENSOR

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98VEGA10SLIM/WH	C	10	900	4000	white	111	25	100	1/40	A+ A++-A
98VEGA20SLIM/WH	C	20	1800	4000	white	131	26	117	1/40	A+ A++-A
98VEGA30SLIM/WH	C	30	2700	4000	white	215	32	185	1/20	A+ A++-A
98VEGA50SLIM/WH	C	50	4500	4000	white	230	30	195	1/20	A+ A++-A
98VEGA100SLIM/WH	C	100	9000	4000	white	327	42	265	1/10	A+ A++-A
98VEGA20SENSLIM/WH	C	20	1800	4000	white	131	26	117	1/30	A+ A++-A
98VEGA30SENSLIM/WH	C	30	2700	4000	white	215	30	185	1/20	A+ A++-A
98VEGA50SENSLIM/WH	C	50	4500	4000	white	230	32	195	1/10	A+ A++-A

Body: Plastic+Aluminium | LED driver: linear | Light source: SANAN | Input voltage: 220V-240V AC | Cable length: 300 mm | Ambient Temperature: -30°C+ +65°C
 Sensor: | Detection Range:110° | Detection Distance: MAX 8m(adjustable) | Ambient Light: 2-1000 lux (adjustable) | Detection Motion Speed: 0.6-1.5m/s;



Material: PC
 Voltage: 450V
 Rated current: 6A
 Wiring Capacity: 0.5-4.0mm²
Cat. Number: 31071

Terminal box IP44



Terminal box IP65

Material: Polypropylene 94-V2 grade
 Sunscreen Rating:Sun Protection(UV)
 Voltage: 450V
 Rated current: 10A
 Terminal Blocks: 3p screw type
 Metal Part:Plated Brass/Steel Spring
 Wiring Capacity: 0.5-2.5mm²
Cat. Number: 31070



Cable connector IP68

Rated operational voltage:AC250V
 Rated operational Ampere(A):≤30A
 Material: flame retardant/Anti UV nylon(PA66)
 Crimping terminals:Nickle-plated brass
 Withstand voltage(normal temperature):3KV
 Operating temperature range: -40°C~+105°C
 Wiring Capacity: 0.5-2.5mm²
Cat. Number: 31072



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



VEGA SLIM

98VEGA150SLIM
98VEGA200SLIM



VEGA SLIM

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98VEGA150SLIM	C	150	15000	5500	black	381	45	302	1/1	A+ A++A
98VEGA200SLIM	C	200	20000	5500	black	420	45	320	1/1	A+ A++A

Body: Plastic+Aluminium | LED driver: linear | Light source: SANAN | Input voltage: 220V-240V AC | Cable length: 300 mm | Ambient Temperature: -30°C~+65°C



Terminal box IP44



Terminal box IP65



Cable connector IP68



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LYRA RGB
98LYRA15RGB



LYRA RGB
98LYRA50RGB



LYRA RGB
98LYRA30RGB

LYRA RGB

964

FLOODLIGHTS



LYRA RGB

Catalogue number	Product category	Model	Watt (W)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98LYRA15RGB	C	LYRA15	15	RGB	black	140	195	50	1/20	A++A
98LYRA30RGB	C	LYRA30	30	RGB	black	184	254	57	1/10	A++A
98LYRA50RGB	C	LYRA50	50	RGB	black	233	300	67	1/5	A++A

Body: Aluminium casting | LED driver: mounted in the body | Light source: Epistar SMD2835 | Input voltage: 200-240V | Remote-controlled distance: 6-8M
Ambient Temperature: - 30°C÷ +55°C | Diffuser: Tempered glass

Material: PC
Voltage: 450V
Rated current: 6A
Wiring Capacity: 0.5-4.0mm²
Cat. Number: 31071

Terminal box IP44

Material: Polypropylene 94-V2 grade
Sunscreen Rating: Sun Protection (UV)
Voltage: 450V
Rated current: 10A
Terminal Blocks: 3p screw type
Metal Part: Plated Brass/Steel Spring
Wiring Capacity: 0.5-2.5mm²
Cat. Number: 31070

Terminal box IP65

Rated operational voltage: AC250V
Rated operational Ampere(A): ≤30A
Material: flame retardant/Anti UV nylon (PA66)
Crimping terminals: Nickel-plated brass
Withstand voltage (normal temperature): 3KV
Operating temperature range: -40°C~+105°C
Wiring Capacity: 0.5-2.5mm²
Cat. Number: 31072

Cable connector IP68





In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SIRIUS SMD

Catalogue number	Product category	Model	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98SIRIUS50SMD	C	SIRIUS50SMD	50	5000	6500	black	137	35	170	1/10	A++A
98SIRIUS100SMD	C	SIRIUS100SMD	100	10000	5500	black	310	80	430	1/10	A++A
98SIRIUS150SMD	C	SIRIUS150SMD	150	15000	5500	black	310	80	430	1/10	A++A
98SIRIUS200SMD	C	SIRIUS200SMD	200	20000	5500	black	386	106	560	1/10	A++A
98SIRIUS250SMD	C	SIRIUS250SMD	250	25000	5500	black	386	106	560	1/10	A++A
98SIRIUS300SMD	C	SIRIUS300SMD	300	30000	5500	black	386	106	560	1/10	A++A



Body: Aluminium | LED driver: mounted in the body | Light source: 2835SMT Epistar | Input voltage: 100V-240V AC | Ambient Temperature: -30°C~+65°C

Material: PC
Voltage: 450V
Rated current: 6A
Wiring Capacity: 0.5-4.0mm²
Cat. Number: 31071



Terminal box IP44



Terminal box IP65

Material: Polypropylene 94-V2 grade
Sunscreen Rating: Sun Protection(UV)
Voltage: 450V
Rated current: 10A
Terminal Blocks: 3p screw type
Metal Part: Plated Brass/Steel Spring
Wiring Capacity: 0.5-2.5mm²
Cat. Number: 31070



Cable connector IP68

Rated operational voltage: AC250V
Rated operational Ampere(A): ≤30A
Material: flame retardant/Anti UV nylon(PA66)
Crimping terminals: Nickel-plated brass
Withstand voltage(normal temperature): 3KV
Operating temperature range: -40°C~+105°C
Wiring Capacity: 0.5-2.5mm²
Cat. Number: 31072



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



STADIUM FLOOD LIGHTS PHOENIX
98PHOENIX720CW/BL



STADIUM FLOOD LIGHTS PHOENIX
98PHOENIX960CW/BL

STADIUM FLOOD LIGHTS PHOENIX


966

FLOODLIGHTS



STADIUM FLOOD LIGHTS PHOENIX

Catalogue number	Product category	Watt (W)	Lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98PHOENIX720CW/BL	C	720	86400	5500K	30°	833,4	442	201	1/1	A++A
98PHOENIX960CW/BL	C	960	115200	5500K	30°	1090	442	201	1/1	A++A

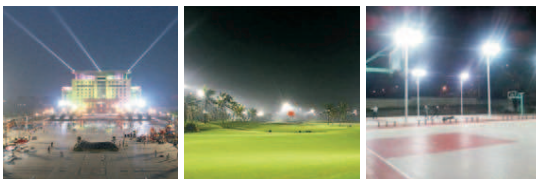

Body: Aluminium | LED driver: MEANWELL | Light source: PHILIPS | Input voltage: 230V AC | Ambient Temperature: -20°C÷ +65°C



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



STADIUM FLOOD LIGHTS PHOENIX
98PHOENIX240CW/BL



STADIUM FLOOD LIGHTS PHOENIX
98PHOENIX480CW/BL




STADIUM FLOOD LIGHTS PHOENIX
98PHOENIX360CW/BL



STADIUM FLOOD LIGHTS PHOENIX

Catalogue number	Product category	Watt (W)	Lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98PHOENIX240CW/BL	C	240	28800	5500K	30°	435,4	341	190	1/1	A++A
98PHOENIX360CW/BL	C	360	43200	5500K	30°	618,4	341	200	1/1	A++A
98PHOENIX480CW/BL	C	480	57600	5500K	30°	579,4	442	201	1/1	A++A

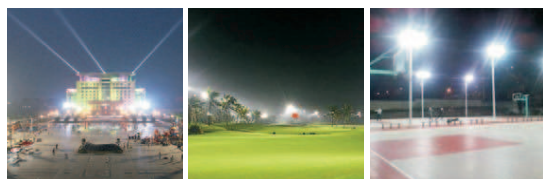

Body: Aluminium | LED driver: MEANWELL | Light source: PHILIPS | Input voltage: 230V AC | Ambient Temperature: -20°C ÷ +65°C



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



RECHARGEABLE
WORKLAMP SMD
98FLOOD10



UNTIL SUPPLY
LAST



LED WORKLAMP SMD

Catalogue number	Product category	Model	Watt (W)	Whole lamp lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98FLOOD10	F	FLOOD10	10	1000	4000	orange	170	41	125	1/20	A++A

98FLOOD10: 5V input & output with 220V adaptor and 1m USB charging cable | Ultra bright led | Materials: ABS | Beam angle: 120° | Battery: 18650 lithium 3.7V 4.4Ah | Run time: 4 hrs in 100% light/ 8hrs in 50% light | Fully charge time: 5-6hrs | Lighting Mode: 100%-50%-SOS-FLASH-OFF



LED WORKLAMP SMD

968

FLOODLIGHTS



RECHARGEABLE
WORKLAMP SMD
98FLOOD10Y



UNTIL SUPPLY
LAST



RECHARGEABLE WORKLAMP SMD

Catalogue number	Product category	Model	Watt (W)	Whole lamp lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98FLOOD10Y	F	FLOOD10Y	10	600	4000	yellow	242	25	215	1/10	A++A

Body: Aluminium | Light source: SMD2835 | Input voltage: 100V-240V | All-round rotation 360° | Any angle hover | With adaptor and car charge
Time of battery work: 100% light-2h; 50% light-4h





LED WORK FLOODLIGHTS

98FLOOD30S
98FLOOD50S



LED IP65 220V

LED WORK FLOODLIGHTS

Catalogue number	Product category	Model	Watt (W)	Whole lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Height (mm)	Width (mm)	Packing/Box (pcs)	Energy class
98FLOOD30S	C	FLOOD30S	30	2700	5500	110°	163.5	210	30.5	1/20	A++A
98FLOOD50S	C	FLOOD50S	50	4500	5500	110°	171	227	32	1/20	A++A

Material: Aluminium | Color body: Yellow | Working Temperature: -20°C +45°C | Two meters 3*1.0mm² rubber cable with plug



~230V 50/60 Hz 110° 20000h RoHS COMPLIANT CE 3+0 standard +extended 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ATLAS 45
98ATLAS45/BL1
98ATLAS45/BL2



ATLAS Sim
98ATSIM106
98ATLASSIM/1
98ATLASSIM/2




ATLAS Ring
98ATR107
98ATLASRING/1
98ATLASRING/2



UNTIL SUPPLY
LAST

ATLAS

Catalogue number	Product category	Watt (W)	Lampholder	Colour	Length1 (mm)	Length2 (mm)	Width (mm)	Width2 (mm)	Height (mm)	Current (A)	Control gear	Packing/Box (pcs)	Energy class
98ATLAS45/BL1	F	70	Rx7s	black	435	350	232	-	85	-	empty fixture	1/4	A++-C
98ATLAS45/BL2	F	150	Rx7s	black	435	350	232	-	85	-	empty fixture	1/4	A++-C
98ATLAS45/W1	F	70	Rx7s	white	435	350	232	-	85	-	empty fixture	1/4	A++-C
98ATSIM106	F	150	Rx7s	black	232	210	280	220	170	1,80	magnetic	1/6	A++-C
98ATLASSIM/1	F	70	Rx7s	black	232	210	280	220	170	-	empty fixture	1/6	A++-C
98ATLASSIM/2	F	150	Rx7s	black	232	210	280	220	170	-	empty fixture	1/6	A++-C
98ATR107	F	70	Rx7s	black	325	280	230	210	93	0,95	magnetic	1/6	A++-C
98ATLASRING/1	F	70	Rx7s	black	325	280	230	210	93	-	empty fixture	1/6	A++-C
98ATLASRING/2	F	150	Rx7s	black	325	280	230	210	93	-	empty fixture	1/6	A++-C

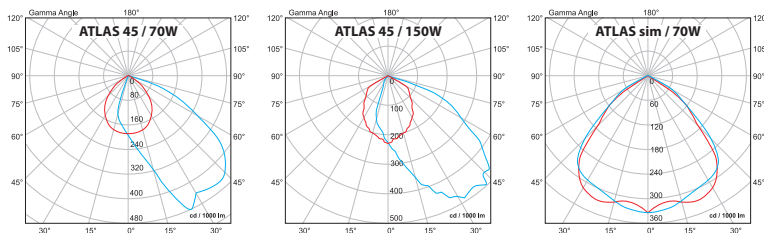

Body: aluminium | Diffuser: tempered glass | Control gear: mounted in the body
Ambient Temperature: -20°C ÷ +65°C





VEGA IP44

- 989009LED
- 989012LED
- 989008LED



VEGA IP65

98VEGA20



VEGA WITH SENSOR IP44

989019LED



NEUTRAL
WHITE
4000K

COOL
WHITE
5400K

IP44

IP65



UNTIL SUPPLY
LAST

VEGA

Catalogue number	Product category	Model	Watt (W)	Lamp	Whole fixture lumens (lm)	Colour temp. (K)	Socket	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
989009LED	F	VEGAJ-78	5.5	LED	440	4000	R7s	grey	200	145	120	1/20	A+ A++A
989012LED	F	VEGA J-118	7.5	LED	700	4000	R7s	grey	260	210	230	1/10	A+ A++A
989008LED	F	VEGAJ-78	5.5	LED	440	4000	R7s	black	200	145	120	1/20	A+ A++A
989019LED	F	VEGA J-118 with sensor	7.5	LED	700	4000	R7s	white	260	210	230	1/10	A+ A++A
989020LED	F	VEGA J-118 with sensor	7.5	LED	700	4000	R7s	black	260	210	230	1/10	A+ A++A
98VEGA20	F	VEGA 20	20	COB	1400	5500	-	grey	140/150	180	100	1/12	A+ A++A

Body: aluminium casting | Ambient Temperature: -30°C÷ +65°C | Diffuser: Tempered glass





ROAD LIGHTS




STREET 300 SMD

98STREET300SMD



STREET SMD, LED CHIP SAMSUNG

Catalogue number	Product category	Dimmable	Watt (W)	LED chip lumens (lm)	Colour temp (K)	Beam angle	Colour body	Diameter of the pole (mm)	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98STREET150SMD	C	-	150	18000	5500	85°x135°	Silver aluminium	60	501	290	87	1/1	A++A
98STREET200SMD	C	-	200	24000	5500	85°x135°	Silver aluminium	60	582	290	87	1/1	A++A
98STREET250SMD	C	Yes	250	30000	5500	85°x135°	Silver aluminium	60	662	290	87	1/1	A++A
98STREET300SMD	C	Yes	300	36000	5500	85°x135°	Silver aluminium	60	796	347	142	1/1	A++A

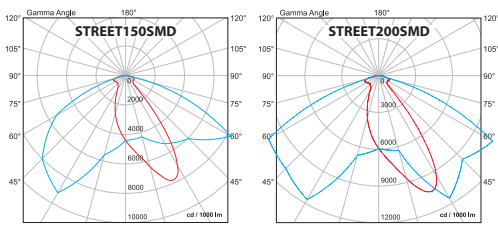

WALL MOUNTING ACCESSORIES
Diam.: 60mm
 Colour body: grey
 Size (mm): Diameter 60 / Width 150 / Height 250
 Catalogue number: 98POLE60
 Packing (pcs): 1



POLE MOUNTING ACCESSORIES
Diam.: 60mm
 Colour body: grey
 Size (mm): Diameter 60 / Width 150 / Height 250
 Catalogue number: 98POLE60P
 Packing (pcs): 1

Body: Silver aluminium | LED driver: mounted in the body | Light source: Samsung 3030SMD | Input voltage: 100V-240V AC | Ambient temperature: -30°C÷ +65°C



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ROUTE SMD STELLAR

- 98ROUTE30SMD
- 98ROUTE50SMD
- 98ROUTE100SMD
- 98ROUTE150SMD



ROUTE SMD STELLAR

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp (K)	Beam angle	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98ROUTE30SMD	C	30	3000	5000-5500	85°x140°	130	53	340	1/1	A++A
98ROUTE50SMD	C	50	5000	5000-5500	85°x140°	155	55	390	1/1	A++A
98ROUTE100SMD	C	100	10000	5000-5500	85°x140°	160	65	450	1/1	A++A
98ROUTE150SMD	C	150	15000	5000-5500	85°x140°	170	65	570	1/1	A++A

Ultra thin design



WALL MOUNTING ACCESSORIES
Diam.: 45mm
Colour body: grey
Size (mm): Diameter 45 / Width 150 / Height 250
Catalogue number: 98POLE45
Packing (pcs): 1



POLE MOUNTING ACCESSORIES
Diam.: 45mm
Colour body: grey
Size (mm): Diameter 45 / Width 150 / Height 250
Catalogue number: 98POLE45P
Packing (pcs): 1

Body: Aluminium | Cover: PC | Voltage: 100-265 VAC | Light source: Sanan | Ambient temperature: -35°C+ +45°C



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



AVENUE 100 SMD
98AVENUE100SMD



AVENUE 50 SMD
98AVENUE50SMD



AVENUE 30 SMD
98AVENUE30SMD



AVENUE SMD, LED CHIP PHILIPS

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp (K)	Beam angle	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98AVENUE30SMD	C	30	3000	5500	70°x150°	365	18	90	1/1	A++A
98AVENUE50SMD	C	50	5000	5500	70°x150°	420	15	234	1/1	A++A
98AVENUE100SMD	C	100	10000	5500	80°x150°	605	15	295	1/1	A++A

AVENUE SMD, LED CHIP PHILIPS

975

ROAD LIGHTS



Ultra thin design



WALL MOUNTING ACCESSORIES
Diam.: 60mm
Colour body: grey
Size (mm): Diameter 60 / Width 150 / Height 250
Catalogue number: 98POLE60
Packing (pcs): 1



POLE MOUNTING ACCESSORIES
Diam.: 60mm
Colour body: grey
Size (mm): Diameter 60 / Width 150 / Height 250
Catalogue number: 98POLE60P
Packing (pcs): 1

Body: Aluminium casting | LED driver: mounted in the body | Light source: SMD3030 | Input voltage: 220-240V | Working temperature: -25+55°C



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SOLAR LED STREET LIGHTS WITH SENSOR

98SOL100
98SOL101
98SOL102

SOLAR LED STREET LIGHTS WITH SENSOR



SOLAR LED STREET LIGHTS WITH SENSOR

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Solar panel (Wp)	Battery (V/mAh)	Sensor range (m)	Length (mm)	Height (mm)	Width (mm)	Packing/Box (pcs)	Energy class
98SOL100	C	20	400	6000	2.3	3.7V/2400mAh	2-6	137	224.4	41.5	1/1	A++A
98SOL101	C	40	850	6000	7	3.7V/6000mAh	3-8	193.7	351.4	50.8	1/1	A++A
98SOL102	C	80	1600	6000	9.5	7.4V/5400mAh	3-8	232	413	58	1/1	A++A

Material: ABS + PC, anti UV and glossy, V0 fireproof | **Colour body:** Black | **Detection angle:** 120° | **Beam angle:** 140°x 70° | **Installation height 98SOL100:** 2-4meters, other models: 3-5m | Possibility to mounting on Wall or Lamp-post | **First 5 hours lighting:** Full brightness+ Weak brightness | After 5 hours or battery capacity<30%: Full brightness+ Weak brightness+ OFF | **Solar panels:** Poly-cristalline silicone; Frosted surface- scratch resistant | **LED&Lens:** LM-80 LEDs 2835SMD; high transmittance PC optical lens | Accessory for wall mounted installation: included

Accessory for wall mounted installation



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.




FESTA SMD STELLAR

98FESTA100SMD
98FESTA150SMD
98FESTA200SMD



FESTA SMD STELLAR

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Beam angle	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98FESTA100SMD	C	100	10000	5000-5500	120°	black	270	151	1/1	A++A
98FESTA150SMD	C	150	15000	5000-5500	120°	black	320	159	1/1	A++A
98FESTA200SMD	C	200	20000	5000-5500	120°	black	380	166	1/1	A++A



Gear box: Aluminium + Graphene | Cover: PC | Voltage: 180-265 VAC | Light source: Sanan | Ambient temperature: -25°C÷ +45°C



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



VECA SMD
98VECA120SMD



VECA SMD
98VECA150SMD



VECA SMD
98VECA200SMD
98VECA250SMD

VECA SMD

978

HIGH BAYS



VECA SMD, LED CHIP PHILIPS

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Beam angle	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98VECA120SMD	C	120	12000	5500	120°	grey	400	120.3	1/1	A++→A
98VECA150SMD	C	150	15000	5500	120°	grey	382	60	1/1	A++→A
98VECA200SMD	C	200	20000	5500	120°	grey	460	170.3	1/1	A++→A
98VECA250SMD	C	250	25000	5500	120°	black	500	180	1/1	A++→A

Gear box: Aluminium | LED driver: mounted in the gear box | Light source: Philips | Ambient temperature: -25°C+ +55°C



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MINICOLOR
98MINICOL-BL



MINICOLOR
98MINICOL-WT



MINICOLOR
98MINICOL-GR



MINICOLOR
98MINICOL-R



MINICOLOR
98MINICOL-G




MINICOLOR
98MINICOL-B



MINICOLOR

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Diameter1 (mm)	Height (mm)	Height1 (mm)	Packing/Box (pcs)	Energy class
98MINICOL-BL	F	30	2400	5500	black	220	115	280	120	1/1	A++>A
98MINICOL-WT	F	30	2400	5500	white	220	115	280	120	1/1	A++>A
98MINICOL-GR	F	30	2400	5500	grey	220	115	280	120	1/1	A++>A
98MINICOL-R	F	30	2400	5500	red	220	115	280	120	1/1	A++>A
98MINICOL-G	F	30	2400	5500	green	220	115	280	120	1/1	A++>A
98MINICOL-B	F	30	2400	5500	blue	220	115	280	120	1/1	A++>A



Reflector: aluminium | Gear box: aluminium casting | LED driver: mounted in the gear box | Light source: Epistar | Ambient Temperature: - 30°C÷ +65°C





LAMPS AND COMPONENTS





VINTAGE LAMP
99LED890S



VINTAGE LAMP
99LED890G



VINTAGE LAMP
99LED104G



VINTAGE LAMPS

Catalogue number	Product category	Watt (W)	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Material	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED104G	C	8	E27	500	2000	Golden glass	240	200	1	A+
99LED890G	C	8	E27	800	2800-3200K	Golden glass	200	185	1	A+
99LED890S	C	8	E27	800	2800-3200K	Smoked glass	200	185	1	A+



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

LED FILAMENT VINTAGE C35 / A60 / ST64



A60
99LED773D




ST64
99LED769D



C35
99LED772D

982

LAMPS



LED FILAMENT VINTAGE C35 / A60 / ST64

Catalogue number	Product category	Dimmable	Watt (W)	Socket type	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED772D	C	yes	4	E14	360	2800-3200K	360°	99	35	1/100	A+
99LED773D	C	yes	8	E27	580	2800-3200K	360°	106	60	1/100	A+
99LED769D	C	yes	8	E27	580	2800-3200K	360°	145	64	1/100	A+

Material: Golden glass



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



G125
99LED771D



G95
99LED770D



G80
99LED975D



LED FILAMENT VINTAGE G80 / G95 / G125

Catalogue number	Product category	Dimmable	Watt (W)	Socket type	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED975D	C	yes	8	E27	580	2700	360°	120	80	1/100	A+
99LED770D	C	yes	8	E27	580	2800-3200K	360°	135	95	1/50	A+
99LED771D	C	yes	8	E27	580	2800-3200K	360°	165	125	1/20	A+

Material: Golden glass



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

VINTAGE LAMPS



VINTAGE LAMP

99LED863G
99LED863S




VINTAGE LAMP

99LED858G
99LED858S



VINTAGE LAMPS

Catalogue number	Product category	Watt (W)	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Material	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED863G	C	8	E27	800	2800-3200K	Golden glass	250	125	1/1	A+
99LED858G	C	8	E27	800	2800-3200K	Golden glass	295	160	1/1	A+
99LED863S	C	8	E27	800	2800-3200K	Smoked glass	250	125	1/1	A+
99LED858S	C	8	E27	800	2800-3200K	Smoked glass	295	160	1/1	A+



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.




VINTAGE LAMP

99LED857G
99LED857S



VINTAGE LAMP

99LED856G
99LED856S



VINTAGE LAMPS

Catalogue number	Product category	Watt (W)	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Material	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED857G	C	8	E27	800	2800-3200K	Golden glass	210	110	1/1	A ⁺
99LED856G	C	8	E27	800	2800-3200K	Golden glass	245	130	1/1	A ⁺
99LED857S	C	8	E27	800	2800-3200K	Smoked glass	210	110	1/1	A ⁺
99LED856S	C	8	E27	800	2800-3200K	Smoked glass	245	130	1/1	A ⁺



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



VINTAGE LAMP
99LED888G



VINTAGE LAMP
99LED889G

VINTAGE LAMPS

986

LAMPS



VINTAGE LAMPS

Catalogue number	Product category	Watt (W)	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Material	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED888G	C	8	E27	800	2800-3200K	Golden glass	390	200	1/1	A*
99LED889G	C	8	E27	800	2800-3200K	Golden glass	400	200	1/1	A*



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



VINTAGE LAMP
99LED888S



VINTAGE LAMP
99LED889S

VINTAGE LAMPS

987

LAMPS



VINTAGE LAMPS

Catalogue number	Product category	Watt (W)	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Material	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED888S	C	8	E27	800	2800-3200K	Smoked glass	390	200	1/1	A*
99LED889S	C	8	E27	800	2800-3200K	Smoked glass	400	200	1/1	A*



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



VINTAGE LAMP

99LED859G
99LED859S




VINTAGE LAMP

99LED860G
99LED860S

VINTAGE LAMPS

988



VINTAGE LAMPS

Catalogue number	Product category	Watt (W)	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Material	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED859G	C	8	E27	800	2800-3200K	Golden glass	310	185	1/1	A ⁺
99LED860G	C	8	E27	800	2800-3200K	Golden glass	280	120	1/1	A ⁺
99LED859S	C	8	E27	800	2800-3200K	Smoked glass	310	185	1/1	A ⁺
99LED860S	C	8	E27	800	2800-3200K	Smoked glass	280	120	1/1	A ⁺



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

LAMPS



VINTAGE LAMP
99LED861G
99LED861S



VINTAGE LAMP
99LED862G
99LED862S



VINTAGE LAMPS

Catalogue number	Product category	Watt (W)	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Material	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED861G	C	8	E27	800	2800-3200K	Golden glass	255	150	1/1	A ⁺
99LED862G	C	8	E27	800	2800-3200K	Golden glass	305	200	1/1	A ⁺
99LED861S	C	8	E27	800	2800-3200K	Smoked glass	255	150	1/1	A ⁺
99LED862S	C	8	E27	800	2800-3200K	Smoked glass	305	200	1/1	A ⁺



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



VINTAGE LAMP
99LED100G



VINTAGE LAMP
99LED979G




VINTAGE LAMP
99LED101G

VINTAGE LAMPS

990

LAMPS



VINTAGE LAMPS

Catalogue number	Product category	Watt (W)	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Material	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED100G	C	4	E27	250	2000	Golden glass	265	220	1	A ⁺
99LED101G	C	8	E27	500	2000	Golden glass	300	200	1	A ⁺
99LED979G	C	4	E27	270	2200	Golden glass	330	120	1/15	A ⁺



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



VINTAGE LAMP
99LED100S




VINTAGE LAMP
99LED101S

VINTAGE LAMPS

991

LAMPS



VINTAGE LAMPS

Catalogue number	Product category	Watt (W)	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Material	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED100S	C	4	E27	150	2000	Smoked glass	265	220	1	A*
99LED101S	C	8	E27	300	2000	Smoked glass	300	200	1	A*



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



VINTAGE LAMP
99LED102S



VINTAGE LAMP
99LED103S

VINTAGE LAMPS

992

LAMPS



VINTAGE LAMPS

Catalogue number	Product category	Watt (W)	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Material	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED102S	C	8	E27	300	2000	Smoked glass	250	180	1	A*
99LED103S	C	8	E27	300	2000	Smoked glass	295	180	1	A*



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



99782



99783



99787

VINTAGE LAMPS

993

LAMPS



IP20



UNTIL SUPPLY
LAST

VINTAGE LAMPS

Catalogue number	Product category	Watt (W)	Socket type	Lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99782	F	60	E27	250	2200-2700	360°	115	60	1/100	D
99783	F	60	E27	250	2200-2700	360°	115	60	1/100	D
99787	F	40	E14	210	2700	360°	98	35	1/100	D

Material brass+ golden glass



SPECIAL purpose lamp





LED GLOBE P45 FILAMENT
99LED664D



LED GLOBE G45 FILAMENT
99LED665D



LED CANDLE C35 FILAMENT
99LED662D



LED A60 FILAMENT
99LED663

LED FILAMENT

994

LAMPS



LED FILAMENT

Catalogue number	Product category	Dimmable	Watt (W)	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Colour body	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED662D	C	yes	4	E14	400	2700	360°	mat	100	35	1/100	A+
99LED664D	C	yes	4	E14	400	2700	360°	mat	76	45	1/100	A+
99LED665D	C	yes	4	E27	400	2700	360°	mat	72	45	1/100	A+
99LED660	C	no	4	E27	400	2700	360°	mat	104	60	1/100	A+



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED CANDLE C37
99LED914
99LED915




LED FLAME
99LED753
99LED754
99LED820



LED CANDLE C37
99LED916
99LED917
99LED917CW



**LED CANDLE C37
DIMMABLE**
99LED855



LED CANDLE C37 / LED FLAME

Catalogue number	Product category	Dimmable	Watt (W)	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED855	C	Yes	5	E14	500	3000	180°	100	37	1/100	A+
99LED914	C	-	8	E27	800	4000	180°	110	37	1/100	A+
99LED915	C	-	8	E27	800	2700	180°	110	37	1/100	A+
99LED916	C	-	8	E14	800	4000	180°	110	37	1/100	A+
99LED917	C	-	8	E14	800	2700	180°	110	37	1/100	A+
99LED917CW	C	-	8	E14	800	6400	180°	110	37	1/100	A+
99LED753	C	-	6	E14	500	4000	220°	100	37	1/100	A+
99LED754	C	-	6	E14	500	2700	220°	100	37	1/100	A+
99LED820	C	-	6	E14	500	6400	220°	100	37	1/100	A+



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED GLOBE P45

99LED912
99LED913
99LED925



LED GLOBE P45

99LED746
99LED747
99LED800



LED GLOBE G45

99LED910
99LED911
99LED911CW




LED GLOBE G45

99LED744
99LED745
99LED801

LED GLOBE P45 / GLOBE G45

996

LAMPS



LED GLOBE P45 / GLOBE G45

Catalogue number	Product category	Watt (W)	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED746	C	6	E14	540	4000	240°	80	45	1/100	A+
99LED747	C	6	E14	540	2700	240°	80	45	1/100	A+
99LED800	C	6	E14	540	6400	240°	80	45	1/100	A+
99LED744	C	6	E27	540	4000	240°	80	45	1/100	A+
99LED745	C	6	E27	540	2700	240°	80	45	1/100	A+
99LED801	C	6	E27	540	6400	240°	80	45	1/100	A+
99LED910	C	8	E27	800	4000	180°	80	45	1/100	A+
99LED911	C	8	E27	800	2700	180°	80	45	1/100	A+
99LED911CW	C	8	E27	800	6400	180°	80	45	1/100	A+
99LED912	C	8	E14	800	4000	180°	80	45	1/100	A+
99LED913	C	8	E14	800	2700	180°	80	45	1/100	A+
99LED925	C	8	E14	800	6400	180°	80	45	1/100	A+



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



DIMMABLE LED CORN BULBS

99LED976



DIMMABLE LED CORN BULBS

99LED977WW

99LED977CW



DIMMABLE LED CORN BULBS


99LED978WW

99LED978CW

DIMMABLE LED CORN BULBS

997

LAMPS



DIMMABLE LED CORN BULBS

Catalogue number	Product category	Watt (W)	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED976	C	7	E14	420	4000	360°	65	16	1/100	A+
99LED977WW	C	6	E14	500	3000	360°	98	35	1/100	A+
99LED977CW	C	6	E14	500	5500	360°	98	35	1/100	A+
99LED978WW	C	6	E27	500	3000	360°	98	35	1/100	A+
99LED978CW	C	6	E27	500	5500	360°	98	35	1/100	A+



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED PEAR A60 STELLAR

99XLED584
99XLED583



LED PEAR A60 STELLAR

99XLED795
99XLED586
99XLED585



LED PEAR A60 STELLAR

99LED742
99LED743




LED PEAR A60 STELLAR

99XLED588
99XLED587

LED PEAR STELLAR

998

LAMPS



LED PEAR STELLAR

Catalogue number	Product category	Watt (W)	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99XLED584	F	8*	580	4000	240°	110	60	1/100	A+
99XLED583	F	8*	580	2700	240°	110	60	1/100	A+
99XLED795	C	10	720	6400	240°	110	60	1/100	A+
99XLED586	C	10	720	4000	240°	110	60	1/100	A+
99XLED585	C	10	720	2700	240°	110	60	1/100	A+
99XLED821	C	12	860	6400	240°	110	60	1/100	A+
99XLED588	C	12	860	4000	240°	110	60	1/100	A+
99XLED587	C	12	860	2700	240°	110	60	1/100	A+
99LED742	C	15	1080	4000	240°	110	60	1/100	A+
99LED743	C	15	1080	2700	240°	110	60	1/100	A+

*Until supply last



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED PEAR A60

99LED794
99LED584
99LED583



LED PEAR A60

99LED795
99LED586
99LED585



**LED PEAR A60
+ RADAR SENSOR**

99LED852



LED PEAR DIMMABLE

99LED425
99LED426



WARM WHITE 2700K
NEUTRAL WHITE 4000K
COOL WHITE 6400K
IP20

LED PEAR

Catalogue number	Product category	Dimmable	Watt (W)	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED794	F	-	8*	720	6400	240°	110	60	1/100	A⁺
99LED584	F	-	8*	720	4000	240°	110	60	1/100	A⁺
99LED583	F	-	8*	720	2700	240°	110	60	1/100	A⁺
99LED795	C	-	10	900	6400	240°	110	60	1/100	A⁺
99LED586	C	-	10	900	4000	240°	110	60	1/100	A⁺
99LED585	C	-	10	900	2700	240°	110	60	1/100	A⁺
99LED852	C	-	10	900	4000	240°	110	60	1/100	A⁺
99LED425	F	Yes	10*	800	4000	240°	114	60	1/100	A⁺
99LED426	F	Yes	10*	800	2700	240°	114	60	1/100	A⁺

*Until supply last

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED PEAR A60

99LED818
99LED819
99LED797

LED PEAR A65

99LED850WW
99LED850W
99LED850CW

LED PEAR A80


99LED908
99LED909
99LED909CW
99LED722

LED PEAR A60

99LED588
99LED587
99LED821

LED PEAR A60 DIMMABLE

99LED582
99LED581



LED PEAR

Catalogue number	Product category	Dimmable	Watt (W)	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED588	C	-	12	1080	4000	240°	127	60	1/100	A+
99LED587	C	-	12	1080	2700	240°	127	60	1/100	A+
99LED821	C	-	12	1080	6400	240°	127	60	1/100	A+
99LED582	C	Yes	12	1080	4000	180°	127	60	1/60	A+
99LED581	C	Yes	12	1080	2700	180°	127	60	1/60	A+
99LED818	C	-	15	1500	4000	180°	115	60	1/100	A+
99LED819	C	-	15	1500	2700	180°	115	60	1/100	A+
99LED797	C	-	15	1500	6400	180°	115	60	1/100	A+
99LED722	F	-	15*	1200	2700	160°	153	80	1/100	A+
99LED850WW	C	-	18	1700	2700	180°	133	65	1/100	A+
99LED850W	C	-	18	1700	4000	180°	133	65	1/100	A+
99LED850CW	C	-	18	1700	6400	180°	133	65	1/100	A+
99LED908	C	-	20	1800	4000	180°	153	80	1/50	A+
99LED909	C	-	20	1800	2700	180°	153	80	1/50	A+
99LED909CW	C	-	20	1800	6400	180°	153	80	1/50	A+

*Until supply last -3 year standard+0 year extended warranty



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MOSQUITO LED 8W IP20
99LED8M



MOSQUITO LED 6W IP20
99LED6KM



MOSQUITO LED PEAR IP20

Catalogue number	Product category	Type	Watt (W)	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED8M	C	Mosquito repellent	8	780	3500	180°	105	60	1/50	A+
99LED6KM	C	Mosquito killer	6	400	4000	200°	113	60	1/50	A+



MOSQUITO LED PEAR: No smell | No noise | No flicker | No UV | Friendly to eyes | Produced with a large amount of light (530-580nm), that repel mosquitoes, thus to achieve the special repellent effect.



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED GLOBE G95
99LED694
99LED695



LED GLOBE G120
99LED748
99LED749




LED FLAME
99LED851

LED GLOBE / LED FLAME

1002

LAMPS



LED GLOBE / LED FLAME

Catalogue number	Product category	Watt (W)	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED694	C	15	1350	4000	240°	130	95	1/20	A+
99LED695	C	15	1350	2700	240°	130	95	1/20	A+
99LED748	C	20	1650	4000	240°	157	120	1/20	A+
99LED749	C	20	1650	2700	240°	157	120	1/20	A+
99LED851	C	1.5-5	200	1500-1800	360°	138	65	1/100	A+



LED Flame effect
99LED851



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED STICKS

- 99LED902
- 99LED903
- 99LED903CW
- 99LED900
- 99LED901
- 99LED901CW



LED R50

- 99LED439
- 99LED440
- 99LED827W
- 99LED827CW



LED SMD E27

- 99LED736
- 99LED736CW
- 99LED737
- 99LED737CW
- 99LED812
- 99LED812CW



LED SMD E27 / LED STICK / LED R50 / LED R80

Catalogue number	Product category	Type	Watt (W)	Lamp holder	LED lamp lumens (lm)	Beam angle	Colour temp. (K)	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED736	C	LED SMD	30	E27	2700	150°	4000	190	100	1/20	A⁺
99LED736CW	C	LED SMD	30	E27	2700	150°	6000	190	100	1/20	A⁺
99LED737	C	LED SMD	40	E27	3600	150°	4000	220	120	1/20	A⁺
99LED737CW	C	LED SMD	40	E27	3600	150°	6000	220	120	1/20	A⁺
99LED812	C	LED SMD	50	E27	4500	150°	4000	255	140	1/20	A⁺
99LED812CW	C	LED SMD	50	E27	4500	150°	6000	255	140	1/20	A⁺
99LED902	C	LED STICKS	9	E27	720	180°	4000	122	37	1/100	A⁺
99LED903	C	LED STICKS	9	E27	720	180°	2700	122	37	1/100	A⁺
99LED903CW	C	LED STICKS	9	E27	720	180°	6400	122	37	1/100	A⁺
99LED900	C	LED STICKS	15	E27	1350	180°	4000	140	45	1/100	A⁺
99LED901	C	LED STICKS	15	E27	1350	180°	2700	140	45	1/100	A⁺
99LED901CW	C	LED STICKS	15	E27	1350	180°	6400	140	45	1/100	A⁺
99LED439	C	LED R50	5,5	E14	500	180°	4000	85	50	1/100	A⁺
99LED440	C	LED R50	5,5	E14	500	180°	2700	85	50	1/120	A⁺
99LED827W	C	LED R80	11	E27	950	180°	4000	112	80	1/100	A⁺
99LED827CW	C	LED R80	11	E27	950	180°	6400	112	80	1/100	A⁺



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



HIGH POWER LED LAMP

99LED854
99LED854CW



HIGH POWER LED LAMP

99LED853
99LED853CW

HIGH POWER LED LAMP

1004

LAMPS



HIGH POWER LED LAMP

Catalogue number	Product category	Watt (W)	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED853	C	40	E27	3600	4000	330°	235	87	1/30	A+
99LED853CW	C	40	E27	3600	6500	330°	235	87	1/30	A+
99LED854	C	60	E27	5400	4000	330°	274	98	1/20	A+
99LED854CW	C	60	E27	5400	6500	330°	274	98	1/20	A+

Material: Thermal conductive plastic and aluminium & PC milky white cover



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED FLYING SAUCER U95
99LED906



LED FLYING SAUCER U95
99LED776



LED FLYING SAUCER U95
99LED778



LED FLYING SAUCER U95
99LED780

LED FLYING SAUCER U95

LAMPS

LED WARM WHITE 2700K NEUTRAL WHITE 4000K **IP20**



UNTIL SUPPLY
LAST

LED FLYING SAUCER U95

Catalogue number	Product category	Watt (W)	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED776	F	18	1620	3000	120°	81	150	1/50	A+
99LED778	F	24	2160	3000	120°	81	150	1/50	A+
99LED780	F	32	2880	3000	120°	81	235	1/30	A+
99LED906	F	50	4500	3000	180°	100	160	1/12	A+

~230V 50/60 Hz SMD 5730 120° E27 Ra≥80 >25000 INSTANT 100% 30000h Hg RoHS COMPLIANT EMC CE 3+0 standard +extended **3** YEAR TOTAL WARRANTY



99LED766
99LED791
99LED766T



99LED767
99LED792
99LED767T



99LED768
99LED793

LED MOULD FOR CEILING LAMP

106

LAMPS



LED MOULD FOR CEILING LAMP

Catalogue number	Product category	Rated voltage	Watt (W)	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99LED766	C	230V AC	9W	900	4000K	120°	160	27	1/40	A+
99LED791	C	230V AC	9W	900	2700K	120°	160	25	1/40	A+
99LED766T	C	12V DC	9W	900	4000K	120°	160	27	1/40	A+
99LED767	C	230V AC	18W	1800	4000K	120°	220	25	1/40	A+
99LED792	C	230V AC	18W	1800	2700K	120°	220	27	1/40	A+
99LED767T	C	12V DC	18W	1800	4000K	120°	220	25	1/40	A+
99LED768	C	230V AC	22W	2200	4000K	120°	270	25	1/40	A+
99LED793	C	230V AC	22W	2200	2700K	120°	270	25	1/40	A+

Body: epoxy board+PC



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED COLOR
99LED825



LED COLOR
99LED826



LED COLOR
99LED822



LED COLOR
99LED823



LED COLOR
99LED824



LED IP20

LED COLOR

Catalogue number	Product category	Watt (W)	Colour of light	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED825	C	3	red	360°	84	60	1/200	A+
99LED826	C	3	yellow	360°	84	60	1/200	A+
99LED822	C	3	blue	360°	84	60	1/200	A+
99LED823	C	3	green	360°	84	60	1/200	A+
99LED824	C	3	white	360°	84	60	1/200	A+

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

LED COLOR
1007
LAMPS



PAR30 IP65

99LED932WW
99LED932W
99LED932CW



PAR30

99LED774
99LED931



PAR30

99LED936W
99LED936WW
99LED936CW



LEDT25

99LED445
99LED446



LED AR111 DIMMABLE

99LED904
99LED905



PAR30 / LED AR111 / LEDT25

Catalogue number	Product category	Dimmable	Watt (W)	Lamp holder	LED type	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter/Width (mm)	Packing/Box (pcs)	Energy class
99LED931	F		12*	E27	SMD 2835	1080	6400	38°	93	95	1/20	A+
99LED936W	C		15	E27	SMD 2835	1350	4000	38°	93	95	1/50	A+
99LED936WW	C		15	E27	SMD 2835	1350	2700	38°	93	95	1/50	A+
99LED936CW	C		15	E27	SMD 2835	1350	6500	38°	93	95	1/50	A+
99LED932CW	C		15	E27	SMD 2835	1275	6400	90°	93	95	1/50	A+
99LED932W	C		15	E27	SMD 2835	1275	4000	90°	93	95	1/50	A+
99LED932WW	C		15	E27	SMD 2835	1275	2700	90°	93	95	1/50	A+
99LED904	C	yes	11	G53	high power	990	4000	36°	58	111	1/100	A+
99LED905	C	yes	11	G53	high power	990	2700	36°	58	111	1/100	A+
99LED445	C		1	E14	SMD 2835	90	4000	180°	63	25	1/500	A+
99LED446	C		1	E14	SMD 2835	90	2700	180°	63	25	1/500	A+

* Until Supply Last



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED7 HIGH POWER PAR16

99LED524
99LED525



LED7 HIGH POWER PAR16

99LED526
99LED527



LED7 HIGH POWER LEDCOB

99LED376



LED7 HIGH POWER LEDCOB

99LED378
99LED379
99LED380
99LED381

LED7 HIGH POWER / LEDCOB



UNTIL SUPPLY
LAST

1009

LED7 HIGH POWER / LEDCOB

Catalogue number	Product category	Watt (W)	Voltage	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED524	F	6	~230V	E14	480	4000	36°	74	50	1/100	A+
99LED525	F	6	~230V	E14	480	2700	36°	74	50	1/100	A+
99LED526	F	6	~230V	E27	480	4000	36°	64	50	1/100	A+
99LED527	F	6	~230V	E27	480	2700	36°	64	50	1/100	A+
99LED376	F	5	~230V	GU10	350	4000	120°	85	50	1/100	A+
99LED378	F	5	~230V	E14	350	4000	120°	85	50	1/100	A+
99LED379	F	5	~230V	E27	350	2700	120°	85	50	1/100	A+
99LED380	F	5	~230V	E14	350	4000	120°	85	50	1/100	A+
99LED381	F	5	~230V	E27	350	2700	120°	85	50	1/100	A+



LAMPS



STELLAR LEDSMD GU10

- 99XLED727
- 99XLED728
- 99XLED729
- 99XLED730
- 99XLED796
- 99XLED731

LEDSMD

1010

LAMPS

WARM WHITE 2700K
NEUTRAL WHITE 4000K
COOL WHITE 6400K
IP20



LEDSMD

Catalogue number	Product category	Watt (W)	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99XLED727	C	3.5	GU10	250	4000	120°	53	50	1/100	A+
99XLED728	C	3.5	GU10	250	2700	120°	53	50	1/100	A+
99XLED731	C	3.5	GU10	250	6400	120°	53	50	1/100	A+
99XLED729	C	7	GU10	500	4000	120°	53	50	1/100	A+
99XLED730	C	7	GU10	500	2700	120°	53	50	1/100	A+
99XLED796	C	7	GU10	500	6400	120°	53	50	1/100	A+

2+0 standard +extended

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED SMD GU10
99LED725



LED SMD GU10

99LED727
99LED728
99LED796
99LED729
99LED730
99LED733
99LED734
99LED735



LED SMD GU10 DIMMABLE

99LED731
99LED732



LED SMD GU5.3 12V

99LED880
99LED880WW



IP20



LED SMD / LED SMD DIMMABLE

Catalogue number	Product category	Dimmable	Voltage (V)	Watt (W)	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED725	F	-	230 V	6	GU10*	540	4000	40°	53	50	1/100	A+
99LED727	C	-	230 V	3	GU10	270	4000	120°	53	50	1/100	A+
99LED728	C	-	230 V	3	GU10	270	2700	120°	53	50	1/100	A+
99LED796	C	-	230 V	6.5	GU10	585	6400	120°	53	50	1/100	A+
99LED729	C	-	230 V	6.5	GU10	585	4000	120°	53	50	1/100	A+
99LED730	C	-	230 V	6.5	GU10	585	2700	120°	53	50	1/100	A+
99LED733	C	-	230 V	6	GU10	-	red	120°	53	50	1/100	A+
99LED734	C	-	230 V	6	GU10	-	blue	120°	53	50	1/100	A+
99LED735	C	-	230 V	6	GU10	-	green	120°	53	50	1/100	A+
99LED731	C	Yes	230 V	6.5	GU10	585	4000	120°	53	50	1/100	A+
99LED732	C	Yes	230 V	6.5	GU10	585	2700	120°	53	50	1/100	A+
99LED880	C	-	12V	6	GU5.3	480	4000	120°	54	50	1/100	A+
99LED880WW	C	-	12V	6	GU5.3	480	2700	120°	54	50	1/100	A+

* Until Supply Last



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LEDSMD PAR16

99LED606
99LED605



LEDSMD PAR16

99LED608
99LED607



LED48SMD

99LED365



LED48SMD

99LED363

LEDSMD

1012

LAMPS

LED WARM WHITE 2700K NEUTRAL WHITE 4000K IP20



UNTIL SUPPLY
LAST

LEDSMD

Catalogue number	Product category	Voltage (V)	Watt (W)	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED606	F	230	3	E14	240	4000	120°	75	50	1/100	A*
99LED605	F	230	3	E14	240	2700	120°	75	50	1/100	A*
99LED608	F	230	3	E27	240	4000	120°	75	50	1/100	A*
99LED607	F	230	3	E27	240	2700	120°	75	50	1/100	A*
99LED363	F	230	3,5	E14	250	2700	120°	76	50	1/100	A
99LED365	F	230	3,5	E27	250	2700	120°	76	50	1/100	A

50/60 Hz SMD 2835 Ra280 >20000 INSTANT ON 100% 30000h RoHS EMC CE 3+0 standard +extended 3 YEAR TOTAL WARRANTY



LED60SMD
99LED414



LEDCOB
99LED374
99LED375
99LED562
99LED563




LED3X2 230VAC
99LED296



LED3X2 230VAC
99LED297



LED3X2 230VAC
99LED300



UNTIL SUPPLY
LAST

LED60SMD / LED3X2 / LEDCOB

Catalogue number	Product category	Watt (W)	Lamp holder	LED lamp lumens (lm)	Voltage (V)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED414	F	3	E27	250	230	2700-3000	120°	76	50	1/100	A*
99LED296	F	6	E14	420	230	2700-3000	60°	65	50	1/100	A
99LED297	F	6	E27	420	230	6000-6400	60°	72	50	1/100	A
99LED300	F	6	GU10	360	230	2700-3000	60°	85	50	1/100	A
99LED374	F	5	GU5.3	350	12	4000-4300	120°	75	50	1/100	A
99LED375	F	5	GU5.3	350	12	2700-3000	120°	75	50	1/100	A
99LED562	F	7	GU5.3	400	12	4000-4300	120°	75	50	1/100	A
99LED563	F	5	GU5.3	400	12	4000-4300	120°	75	50	1/100	A



LED60SMD / LED3X2 / LEDCOB



LEDG4
99LED813
99LED814



LEDG9
99LED815
99LED816
99LED817




LEDG9
99LED933
99LED933W
99LED933CW



LED DECORATIVE CANDLE
99CANDLE



CABINET HINGE LED LIGHT
9HINGE2



LEDG4 / LEDG9 / CABINET HINGE LED LIGHT / LED DECORATIVE CANDLE WITH REMOTE

Catalogue number	Product category	Description	Lamp holder	Watt (W)	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED813	C	LED G4-12V	G4	1,2	100	3000	300°	38	12	1/500	A
99LED814	F	LED G4-12V*	G4	1,2	100	4000	300°	38	12	1/500	A
99LED815	C	LED G9-230V	G9	4	350	3000	300°	51	15	1/500	A
99LED816	C	LED G9-230V	G9	4	350	4000	300°	51	15	1/500	A
99LED817	C	LED G9-230V	G9	4	350	6500	300°	51	15	1/500	A
99LED933	C	LED G9-230V	G9	7	630	3000	300°	65	19	1/500	A
99LED933W	C	LED G9-230V	G9	7	630	4000	300°	65	19	1/500	A
99LED933CW	C	LED G9-230V	G9	7	630	6400	300°	65	19	1/500	A
9HINGE2	C	CABINET HINGE LED LIGHT	-	2	-	-	-	48	20	0/300	A
99CANDLE	F	LED CANDLE WITH REMOTE*	-	-	-	-	-	2.25	1.45	1/120	A

*Until Supply Last



High-quality ABS material, environmental-friendly, sturdy and durable to use. Easy to install and convenient to use| Operated by 12V 23A battery (Not included) | When opening the cabinet, lamp will turn on automatically. When closing the cabinet, the light turns off



LED DECORATIVE CANDLE WITH REMOTE
Power supply:DC3.7V/200MAH(Rechargeable Polymer Li-battery)
4hours to recharge,12hours working
LED lights identify the charging state
With ON/OFF and dimmer function
Time fuction 2H/4H/6H/8H
1set = 1 Candle + 1 charge + 1 remote



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

LEDG4/LEDG9/CABINETHINGELEDLIGHT/LEDDCORATIVECANDLEWITHREMOTE



2U
99200029



3U
99216165




IP20



UNTIL SUPPLY
LAST

2U / 3U

Catalogue number	Product category	Model	Watt (W)	Lamp holder	Lumen (lm)	Colour temp. (K)	Diameter (mm)	Length (mm)	Ø (mm)	Packing/Box (pcs)	Energy class
99200028	F	2U/T3	5	E14	175	2700K	37	110	9	1/100	A
99200029	F	2U/T3	5	E27	175	2700K	37	110	9	1/100	A
99200030	F	2U/T3	9	E14	405	2700K	37	130	9	1/100	A
99200032	F	2U/T3	11	E14	530	2700K	37	140	9	1/100	A
99200033	F	2U/T3	11	E14	530	6400K	37	140	9	1/100	A
99216166	F	3U/T2	7	E14	285	4000K	33	100	7	1/100	A
99216165	F	3U/T2	7	E27	285	4000K	33	100	7	1/100	A
99216168	F	3U/T2	11	E14	530	4000K	33	110	7	1/100	A
99216170	F	4U/T2	15	E14	800	4000K	40	115	7	1/100	A





FULL SPIRAL

99210046
99210048



FULL SPIRAL

99210047



HALF SPIRAL

99210144



HALF SPIRAL

99210145
99210147


FULL SPIRAL / HALF SPIRAL

1016

LAMPS




UNTIL SUPPLY
LAST



FULL SPIRAL / HALF SPIRAL

Catalogue number	Product category	Model	Watt (W)	Lamp holder	Lumen (lm)	Colour temp. (K)	Diameter (mm)	Length (mm)	Ø (mm)	Packing/Box (pcs)	Energy class
99210046	F	FULL SPIRAL	5	E14	175	2700K	32	78	7	1/100	A
99210048	F	FULL SPIRAL	9	E14	405	2700K	32	96	7	1/100	A
99210047	F	FULL SPIRAL	5	E27	175	2700K	32	78	7	1/100	A
99210145	F	HALF SPIRAL/T2	9	E14	405	4000K	40	96	8	1/100	A
99210147	F	HALF SPIRAL/T2	11	E14	530	4000K	40	100	8	1/100	A
99210144	F	HALF SPIRAL/T2	9	E27	405	4000K	40	90	8	1/100	A





SPIRAL G9

- 99211152
- 99211418
- 99211419
- 99211153



ESLJ

99217304



GU10/SPIRAL

- 99212156
- 99212422

ESL WARM WHITE 2700K NEUTRAL WHITE 4000K COOL WHITE 6400K IP20



UNTIL SUPPLY
LAST

G9 / GU10 / ESLJ

Catalogue number	Product category	Model	Watt (W)	Lamp holder	Lumen (lm)	Colour temp. (K)	Diameter (mm)	Length (mm)	Ø (mm)	Packing/Box (pcs)	Energy class
99211152	F	G9/SPIRAL	5	G9	175	4000K	31	66	7	1/100	A
99211418	F	G9/SPIRAL	5	G9	175	2700K	31	66	7	1/100	A
99211419	F	G9/SPIRAL	7	G9	285	2700K	31	76	7	1/100	A
99211153	F	G9/SPIRAL	7	G9	285	4000K	31	76	7	1/100	A
99212156	F	GU10/SPIRAL	5	GU10	175	4000K	31	68	7	1/100	A
99212422	F	GU10/SPIRAL	5	GU10	175	2700K	31	68	7	1/100	A
99217304	F	ESLJ78	9	R7s	370	6400K	60	78	-	1/100	A

-230V 50/60 Hz Ra282 >10000 8000h Hg <2mg RoHS EMC CE 2+0 standard+extended 2 YEAR TOTAL WARRANTY



GLOBE
99280093




PEAR
99290100
99290101
99290102
99290103
99290104
99290105
99290106

GLOBE / PEAR

1018

LAMPS



GLOBE / PEAR

Catalogue number	Product category	Watt (W)	Lumen (lm)	Colour temp. (K)	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99280093	F	15	800	6400	80	115	1/20	A
99290100	F	9	405	2700	100	55	1/100	A
99290101	F	9	405	6400	100	55	1/100	A
99290102	F	11	530	2700	106	55	1/100	A
99290103	F	11	530	6400	106	55	1/100	A
99290104	F	15	800	2700	140	65	1/100	A
99290105	F	15	800	6400	140	65	1/100	A
99290106	F	20	1150	2700	150	65	1/100	A





CANDLE
99213159
99213160



G45
9918305
9918356



G45
9918357




GU10
99214358
99214161
99214359
99214162
99214163



CANDLE / G45 / GU10

Catalogue number	Product category	Watt (W)	Lamp holder	Lumen (lm)	Colour temp. (K)	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99213159	F	7	E14	285	4000	100	38	1/100	A
9918305	F	7	E14	285	2700	85	45	1/100	A
9918356	F	7	E14	285	4000	85	45	1/100	A
9918357	F	7	E27	285	4000	85	45	1/100	A
99214358	F	7	GU10	285	2700	58	50	1/100	A
99214161	F	7	GU10	285	4000	58	50	1/100	A
99214359	F	9	GU10	405	2700	58	50	1/100	A
99214162	F	9	GU10	405	4000	58	50	1/100	A
99214360	F	11	GU10	530	2700	58	50	1/100	A
99214163	F	11	GU10	530	4000	58	50	1/100	A





R50
99215351



T45
9918307
9918352



T45
9918308
9918353

R50 / T45

100

LAMPS

ESL WARM WHITE 2700K NEUTRAL WHITE 4000K IP20



UNTIL SUPPLY
LAST

R50 / T45

Catalogue number	Product category	Model	Watt (W)	Lamp holder	Lumen (lm)	Colour temp. (K)	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99215351	F	R50	9	E14	405	2700	88	50	1/100	A
99215164	F	R50	9	E14	405	4000	88	50	1/100	A
9918307	F	T45	8	E27	380	2700	92	45	1/100	A
9918352	F	T45	8	E27	380	4000	92	45	1/100	A
9918308	F	T45	8	E27	380	2700	92	45	1/100	A
9918353	F	T45	8	E27	380	4000	92	45	1/100	A

-230V 50/60 Hz Ra282 >10000 <2s 8000h Hg <2mg RoHS EMC CE 2+0 standard +extended 2 YEAR TOTAL WARRANTY



LED PLL

99LED930

LED PLL

1021

LAMPS



COOL
WHITE
6400K

IP20



LED PLL

Catalogue number	Product category	Dimmable	Watt (W)	Lamp holder	LED type	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter/Width (mm)	Packing/Box (pcs)	Energy class
99LED930	C		20	2G11	SMD 2835	2000	5500	170°	530	43	1/50	A+





LED PLC
99LED553

LED PLC

102

LAMPS

LED WARM WHITE 2700K IP20



UNTIL SUPPLY
LAST

LED PLC

Catalogue number	Product category	Watt (W)	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Width (mm)	Height (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED553	F	15	G24d	1350	2700	120°	193	-	-	38	1/10	A+



PLC2P
99250367



PLC4P
99270375
99270376
99270089



PLC / PLL

Catalogue number	Product category	Model	Watt (W)	Lamp holder	Lumen (lm)	Colour temp. (K)	Length (mm)	Width (mm)	Height (mm)	Ø (mm)	Packing/Box (pcs)	Energy class
99250367	F	PLC2P	10	G24d	530	2700	35	35	110	12	1/100	A
99270375	F	PLC4P	13	G24d	780	2700	35	35	136	12	1/100	A
99270376	F	PLC4P	13	G24d	780	4000	35	35	136	12	1/100	A
99270089	F	PLC4P	13	G24d	780	6400	35	35	136	12	1/100	A





LED TUBE T5

99LED929

99LED927



LED TUBE T5

99LED928

99LED926

LED TUBE T5

1024

LAMPS



LED TUBE T5

Catalogue number	Product category	Watt (W)	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED928	C	10W	1100	4000	170°	549	16	1/100	A ⁺
99LED926	C	10W	1100	6400	170°	549	16	1/100	A ⁺
99LED929	C	20W	2200	4000	170°	1149	16	1/100	A ⁺
99LED927	C	20W	2200	6400	170°	1149	16	1/100	A ⁺



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



**MEAT FRESH LIGHT
LED TUBE T8**

99LED960M
99LED962M



**VEGETABLES FRESH LIGHT
LED TUBE T8**

99LED963F
99LED965F



**BREAD FRESH LIGHT
LED TUBE T8**

99LED966B
99LED968B



FRESH LIGHT LED TUBE T8

Catalogue number	Product category	Watt (W)	Colour temp. (K)	LED lamp lumens (lm)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED960M	C	9	6000+red (660nm)	585	300°	600	26	1/25	A+
99LED962M	C	18	6000+red (660nm)	1170	300°	1200	26	1/25	A+
99LED963F	C	9	6000+green (470nm)	720	300°	600	26	1/25	A+
99LED965F	C	18	6000+green (470nm)	1440	300°	1200	26	1/25	A+
99LED966B	C	9	3000	810	300°	600	26	1/25	A+
99LED968B	C	18	3000	1620	300°	1200	26	1/25	A+



This special lighting mostly use for meat, fruit, vegetable, bread and so on in supermarket. Through the colour mixing technology to achieve unparalleled lighting effect and effectively improve the fresh food area to attract customer different occasions, green for vegetable and fruit department. Red in generally used for meat lighting to show the delicious meat and you could always find the lighting that you need. Application- supermarket, shelves, freezer stores, department stores counters.



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED TUBE T8 STELLAR

99XLED447
99XLED448



LED TUBE T8 STELLAR

99XLED354
99XLED355



LED TUBE T8 STELLAR

99XLED351
99XLED352

LED TUBE T8 STELLAR

106

LAMPS



LED TUBE T8 STELLAR

Catalogue number	Product category	Watt (W)	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99XLED351	C	9	630	6400	270°	603	26	1/25	A+
99XLED352	C	9	630	4000	270°	603	26	1/25	A+
99XLED354	C	18	1260	6400	270°	1213	26	1/25	A+
99XLED355	C	18	1260	4000	270°	1213	26	1/25	A+
99XLED447	C	24	1680	6400	270°	1513	26	1/25	A+
99XLED448	C	24	1680	4000	270°	1513	26	1/25	A+



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED TUBE T8

99LED447M
99LED448M



LED TUBE T8

99LED354M
99LED355M



LED TUBE T8

99LED351M
99LED352M



LED TUBE T8

Catalogue number	Product category	Watt (W)	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED351M	C	10	900	6400	300°	604	28	1/25	A*
99LED352M	C	10	900	4000	300°	604	28	1/25	A*
99LED354M	C	18	1850	6400	300°	1213	28	1/25	A*
99LED355M	C	18	1850	4000	300°	1213	28	1/25	A*
99LED447M	C	24	2400	6400	300°	1514	28	1/25	A*
99LED448M	C	24	2400	4000	300°	1514	28	1/25	A*



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



EST3F-T8



EST-T5

EST3F-T8 & T5 TRIPHOSPHOR



UNTIL SUPPLY
LAST

EST3F-T8 & T5 TRIPHOSPHOR

Catalogue number	Product category	Model	Watt (W)	Lumen (lm)	Colour temp. (K)	Length 1 (mm)	Length 2 (mm)	Packing/Box (pcs)	Energy class
992304163F	F	EST3F-T8	58	4450	2700	1500	1515	1/25	A
992304173F	F	EST3F-T8	58	4450	4000	1500	1515	1/25	A
99230407	F	EST-T8	58	4080	4000	1500	1515	1/25	B
99220383	F	EST-T5	4	195	2700	144	150	1/100	A
99220384	F	EST-T5	4	195	4000	144	150	1/100	A
99220063	F	EST-T5	4	195	6400	144	150	1/100	A
99220385	F	EST-T5	6	380	2700	210	220	1/100	A
99220393	F	EST-T5	21	1850	2700	847	863	1/100	A
99220394	F	EST-T5	21	1850	4000	847	863	1/100	A
99220395	F	EST-T5	28	2550	2700	1148	1200	1/100	A
99220397	F	EST-T5	35	3250	2700	1445	1500	1/100	A
99220399	F	EST-T5	35	3250	6400	1445	1500	1/100	A
99220400	F	EST-T5	49	3850	2700	1445	1500	1/100	A
99220425	F	EST-T5	54	4250	2700	1148	1200	1/100	A

108

LAMPS





MHL
99410129



MHL GR
99410132
99410133

MHL / MHL GR

109

LAMPS

IP20



UNTIL SUPPLY
LAST

MHL / MHL GR

Catalogue number	Product category	Watt (W)	Lamp holder	Lumen (lm)	Colour temp. (K)	Colour	Length 1 (mm)	Length 2 (mm)	Width (mm)	Packing/Box (pcs)	Energy class
99410129	F	150	G12	12000	4200	transparent	79	110	23	1/240	A+
99410132	F	70	Rx7s	-	-	green	104	117	20	1/20	A+
99410133	F	150	Rx7s	-	-	green	121	134	24	1/20	A+



LED STRIPS AND ALUMINIUM PROFILES



LED 150 RGB 12V DC STELLAR IP20
99XLED311



LED 300 12V DC STELLAR IP65
99XLED312
99XLED313



LED 150 RGB / 300 STELLAR

Catalogue number	Product category	Model	LEDs (pcs/m)	Watts / meter	Colour temp. (K)	Colour of light	Protection rating	Packing/Box (pcs)	Energy class
99XLED311	C	LED- 5050 *	30pcs/m	7.2 W/M	-	RGB	IP 20	5/20	A++A
99XLED316	C	LED- 5050*	30pcs/m	7.2W/M		RGB	IP65	5/20	A++A
99XLED306	C	LED- 3528-60WW ***	60pcs/m	4.8W/M	2700-3000K	warm white	IP 20	5/20	A++A
99XLED305	C	LED- 3528-60CW ***	60pcs/m	4.8W/M	6000-6500K	cold white	IP 20	5/20	A++A
99XLED312	C	LED- 3528-60CW ***	60pcs/m	4.8W/M	6000-6500	cold white	IP65	5/20	A++A
99XLED313	C	LED- 3528-60WW ***	60pcs/m	4.8W/M	2700-3000	warm white	IP65	5/20	A++A

* Flex white FCB, 10mm, double layer, mark cut
 ** Luminous efficiency: 10-12 lm/LED, 10mm Flex white FCB, double layer, mark cut
 *** Luminous efficiency: 3-4 lm/LED, 8mm Flex yellow PCB, single layer, mark cut
 **** Luminous efficiency: 3-4 lm/LED, 8mm Flex white FCB, double layer, mark cut

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED 300 12V DC IP20

- 99LED670
- 99LED671
- 99LED672
- 99LED673
- 99LED674
- 99LED675
- 99LED676



LED 300 12V DC IP65

- 99LED677
- 99LED678
- 99LED679
- 99LED680
- 99LED681
- 99LED682
- 99LED683



WARM WHITE 2700K
COOL WHITE 6400K
IP20
IP65
12V DC

LED 300

Catalogue number	Product category	Model	LEDs (pcs/m)	Watts / meter	Colour temp. (K)	Colour of light	Protection rating	Packing/Box (pcs)	Energy class
99LED670	C	LED-5050-60-WW	60pcs/m	14.4W/M	2700~3000	warm white	IP 20	5/20	A++A
99LED671	C	LED-5050-60-CW	60pcs/m	14.4W/M	6200~6500	cold white	IP 20	5/20	A++A
99LED672	C	LED-5050-60-Y	60pcs/m	14.4W/M	587-592	yellow	IP 20	5/20	A++A
99LED673	C	LED-5050-60-G	60pcs/m	14.4W/M	520-525	green	IP 20	5/20	A++A
99LED674	C	LED-5050-60-B	60pcs/m	14.4W/M	465-470	blue	IP 20	5/20	A++A
99LED675	C	LED-5050-60-R	60pcs/m	14.4W/M	620-630	red	IP 20	5/20	A++A
99LED676	C	LED-5050-60-RGB*	60pcs/m	14.4W/M	-	RGB	IP 20	5/20	A++A
99LED677	C	LED-5050-60-WW	60pcs/m	14.4W/M	2700~3000	warm white	IP 65	5/20	A++A
99LED678	C	LED-5050-60-CW	60pcs/m	14.4W/M	6200~6500	cold white	IP 65	5/20	A++A
99LED679	C	LED-5050-60-Y	60pcs/m	14.4W/M	587-592	yellow	IP 65	5/20	A++A
99LED680	C	LED-5050-60-G	60pcs/m	14.4W/M	520-525	green	IP 65	5/20	A++A
99LED681	C	LED-5050-60-B	60pcs/m	14.4W/M	465-470	blue	IP 65	5/20	A++A
99LED682	C	LED-5050-60-R	60pcs/m	14.4W/M	620-630	red	IP 65	5/20	A++A
99LED683	C	LED-5050-60-RGB*	60pcs/m	14.4W/M	-	RGB	IP 65	5/20	A++A

Luminous efficiency: 20-22Lm/LED, 10mm Flex white PCB, with 3M adhere attached, mark cut.

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED 600 12V DC STELLAR IP20

99XLED308
99XLED307
99XLED321



LED 300 12V DC STELLAR IP65

99XLED317
99XLED318
99XLED319



WARM WHITE 2700K
NEUTRAL WHITE 4000K
COOL WHITE 6400K
IP20
IP65
12V DC

LED 600 / 300 STELLAR

Catalogue number	Product category	Model	LEDs (pcs/m)	Watts / meter	Colour temp. (K)	Colour of light	Protection rating	Packing/Box (pcs)	Energy class
99XLED308	C	LED- 3528-120WW ****	120pcs/m	9.6W/M	2700-3000	warm white	IP 20	5/20	A++A
99XLED321	C	LED- 3528-120W ****	120pcs/m	9.6W/M	4000-4300	neutral white	IP 20	5/20	A++A
99XLED307	C	LED- 3528-120CW ****	120pcs/m	9.6W/M	6000-6500	cold white	IP 20	5/20	A++A
99XLED315	C	LED- 3528-120WW ****	120pcs/m	9.6W/M	2700-3000	warm white	IP65	5/20	A++A
99XLED320	C	LED- 3528-120W ****	120pcs/m	9.6W/M	4000-4300	neutral white	IP65	5/20	A++A
99XLED314	C	LED- 3528-120CW ****	120pcs/m	9.6W/M	6000-6500	cold white	IP65	5/20	A++A
99XLED310	C	LED- 5050-60WW **	60pcs/m	14.4W/M	2700-3000	warm white	IP 20	5/20	A++A
99XLED322	C	LED- 5050-60W **	60pcs/m	14.4W/M	4000-4300	neutral white	IP 20	5/20	A++A
99XLED309	C	LED- 5050-60CW **	60pcs/m	14.4W/M	6000-6500	cold white	IP 20	5/20	A++A
99XLED318	C	LED- 5050-60WW **	60pcs/m	14.4W/M	2700-3000	warm white	IP65	5/20	A++A
99XLED319	C	LED- 5050-60W **	60pcs/m	14.4W/M	4000-4300	neutral white	IP65	5/20	A++A
99XLED317	C	LED- 5050-60CW **	60pcs/m	14.4W/M	6000-6500	cold white	IP65	5/20	A++A

* Flex white FCB, 10mm, double layer, mark cut
 ** Luminous efficiency: 10-12 lm/LED, 10mm Flex white FCB, double layer, mark cut
 *** Luminous efficiency: 3-4 lm/LED, 8mm Flex yellow PCB, single layer, mark cut
 **** Luminous efficiency: 3-4 lm/LED, 8mm Flex white FCB, double layer, mark cut

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED 600 12V DC IP20

99LED666
99LED667



LED 600 12V DC IP65

99LED668
99LED669

LED 600

1034

LED STRIPS AND PROFILES



WARM WHITE 2700K
COOL WHITE 6400K
IP20
IP65
12V DC

LED 600

Catalogue number	Product category	Model	LEDs (pcs/m)	Watts / meter	Colour temp. (K)	Colour of light	Protection rating	Packing/Box (pcs)	Energy class
99LED666	C	LED-3528-120-WW	120pcs/m	9,6W/M	2700-3000	warm white	IP20	5/20	A++A
99LED667	C	LED-3528-120-CW	120pcs/m	9,6W/M	6200-6500	cold white	IP20	5/20	A++A
99LED668	C	LED-3528-120-WW	120pcs/m	9,6W/M	2700-3000	warm white	IP65	5/20	A++A
99LED669	C	LED-3528-120-CW	120pcs/m	9,6W/M	6200-6500	cold white	IP65	5/20	A++A

Luminous efficiency: 20-22Lm/LED, with 3M adhere attached, mark cut.

4+1 standard +extended

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED 1200 12V DC IP20

99LED684
99LED685



LED 1200 12V DC IP65

99LED686
99LED687



LED 600 12V DC IP20

99LED688
99LED689
99LED690



LED 600 12V DC IP65

99LED691
99LED692
99LED693



WARM WHITE 2700K
COOL WHITE 6400K
IP20
IP65
12V DC

LED 1200 / 600

Catalogue number	Product category	Model	LEDs (pcs/m)	Watts / meter	Colour temp. (K)	Colour of light	Protection Rating	Packing/Box (pcs)	Energy class
99LED684	C	LED-3528-2X120-WW	2X120pcs/m	20W/M	2700-3000	warm white	IP20	5/20	A++A
99LED685	C	LED-3528-2X120-CW	2X120pcs/m	20W/M	6200-6500	cold white	IP20	5/20	A++A
99LED686	C	LED-3528-2X120-WW	2X120pcs/m	20W/M	2700-3000	warm white	IP65	5/20	A++A
99LED687	C	LED-3528-2X120-CW	2X120pcs/m	20W/M	6200-6500	cold white	IP65	5/20	A++A
99LED688	C	LED-5050-2X60-WW	2X60pcs/m	29W/M	2700-3000	warm white	IP 20	5/20	A++A
99LED689	C	LED-5050-2X60-CW	2X60pcs/m	29W/M	6200-6500	cold white	IP 20	5/20	A++A
99LED690	C	LED-5050-2X60-RGB	2X60pcs/m	29W/M	-	RGB	IP 20	5/20	A++A
99LED691	C	LED-5050-2X60-WW	2X60pcs/m	29W/M	2700-3000	warm white	IP 65	5/20	A++A
99LED692	C	LED-5050-2X60-CW	2X60pcs/m	29W/M	6200-6500	cold white	IP 65	5/20	A++A
99LED693	C	LED-5050-2X60-RGB	2X60pcs/m	29W/M	-	RGB	IP 65	5/20	A++A

Luminous efficiency: 6-7Lm/LED, 15mm Flex white PCB, with 3M adhere attached, mark cut.
Luminous efficiency: 6-7Lm/LED, 17mm Flex white PCB hollow tube waterproof IP65, with 3M adhere attached, mark cut.

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED 300 RGBW

99LED884

LED 300 RGBW

1036









LED 300 RGBW

Catalogue number	Product category	Model	LEDs (pcs/m)	Watts / meter	Colour of light	Protection rating	Packing/Box (pcs)	Energy class
99LED884	C	LED-5050-RGBW	60pcs/m	14.4W/M	RGB+WHITE	IP 20	5/50	A++→A

Dimensions: 5000 x 10 x 1mm
















In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

LED STRIPS AND PROFILES



LED 300 24V DC - IP20

99LED866
99LED867



LED 300 24V DC - IP65

99LED874
99LED875



WARM WHITE 2700K
COOL WHITE 6400K
IP20
IP65
24V DC

LED 300

Catalogue number	Product category	Model	LEDs (pcs/m)	Watts / meter	Colour temp. (K)	Colour of light	Protection rating	Packing/Box (pcs)	Energy class
99LED866	C	LED-5050-60-WW **	60pcs/m	14.4W/M	2700-3000	warm white	IP 20	5/100	A++A
99LED867	C	LED-5050-60-CW **	60pcs/m	14.4W/M	6200-6500	cold white	IP 20	5/100	A++A
99LED874	C	LED-5050-60-WW **	60pcs/m	14.4W/M	2700-3000	warm white	IP 65	5/100	A++A
99LED875	C	LED-5050-60-CW **	60pcs/m	14.4W/M	6200-6500	cold white	IP 65	5/100	A++A

* Luminous efficiency: 20-22 lm/LED, with 3M adhere attached, mark cut.

** Luminous efficiency: 20-22 lm/LED, with 3M adhere attached, mark cut.

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED 600 24V DC - IP20

- 99LED864
- 99LED865
- 99LED868
- 99LED869
- 99LED870
- 99LED871



LED 600 24V DC - IP65

- 99LED872
- 99LED873
- 99LED876
- 99LED877
- 99LED878
- 99LED879



WARM WHITE 2700K
COOL WHITE 5400K
IP20
IP65
24V DC


LED 600

Catalogue number	Product category	Model	LEDs (pcs/m)	Watts / meter	Colour temp. (K)	Colour of light	Protection rating	Packing/Box (pcs)	Energy class
99LED864	C	LED-3528-120-WW *	120pcs/m	9.6W/M	2700-3000	warm white	IP 20	5/100	A++A
99LED865	C	LED-3528-120-CW *	120pcs/m	9.6W/M	6200-6500	cold white	IP 20	5/100	A++A
99LED868	C	LED-3528-120-Y *	120pcs/m	9.6W/M	587-592	yellow	IP 20	5/100	A++A
99LED869	C	LED-3528-120-G *	120pcs/m	9.6W/M	520-525	green	IP 20	5/100	A++A
99LED870	C	LED-3528-120-B *	120pcs/m	9.6W/M	465-470	blue	IP 20	5/100	A++A
99LED871	C	LED-3528-120-R *	120pcs/m	9.6W/M	620-630	red	IP 20	5/100	A++A
99LED872	C	LED-3528-120-WW *	120pcs/m	9.6W/M	2700-3000	warm white	IP 65	5/100	A++A
99LED873	C	LED-3528-120-CW *	120pcs/m	9.6W/M	6200-6500	cold white	IP 65	5/100	A++A
99LED876	C	LED-3528-120-Y *	120pcs/m	9.6W/M	587-592	yellow	IP 65	5/50	A++A
99LED877	C	LED-3528-120-G *	120pcs/m	9.6W/M	520-525	green	IP 65	5/50	A++A
99LED878	C	LED-3528-120-B *	120pcs/m	9.6W/M	465-470	blue	IP 65	5/50	A++A
99LED879	C	LED-3528-120-R *	120pcs/m	9.6W/M	620-630	red	IP 65	5/50	A++A

* Luminous efficiency: 22-24 lm/LED, with 3M adhere attached, mark cut.


** Luminous efficiency: 22-24 lm/LED, with 3M adhere attached, mark cut.

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

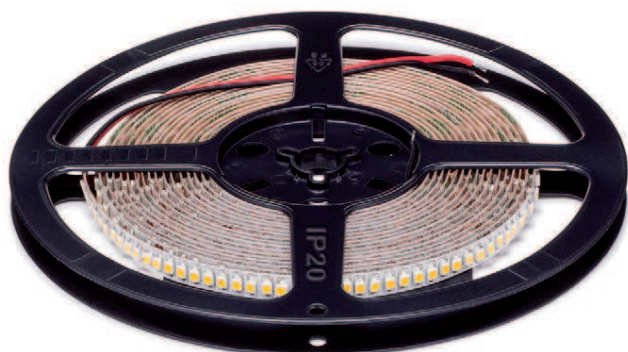

LED 960 24V DC - IP20

99LED881WW
99LED881
99LED881CW

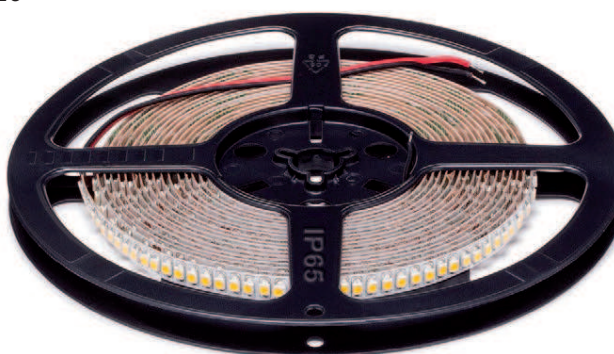

LED 960 24V DC - IP65

99LED882WW
99LED882
99LED882CW



LED WARM WHITE 2700K NEUTRAL WHITE 4000K COOL WHITE 6400K **IP20** **IP65** **24V DC**

LED 960

Catalogue number	Product category	Model	LEDs (pcs/m)	Watts / meter	Colour temp. (K)	Colour of light	Protection Rating	Packing/Box (pcs)	Energy class
99LED881WW	C	LED-3528-192-WW	192pcs/m	20W/M	2700-3000	warm white	IP20	5/50	A++A
99LED881	C	LED-3528-192-W	192pcs/m	20W/M	4000-4300	neutral white	IP20	5/50	A++A
99LED881CW	C	LED-3528-192-CW	192pcs/m	20W/M	6000-6500	cold white	IP20	5/50	A++A
99LED882WW	C	LED-3528-192-WW	192pcs/m	20W/M	2700-3000	warm white	IP65	5/50	A++A
99LED882	C	LED-3528-192-W	192pcs/m	20W/M	4000-4300	neutral white	IP65	5/50	A++A
99LED882CW	C	LED-3528-192-CW	192pcs/m	20W/M	6000-6500	cold white	IP65	5/50	A++A

Luminous efficiency: 22-24 lm/LED, 8mm Flex white PCB, with 3M adhere attached, mark cut.

24V DC SMD 3528 REEL 5m 120° 30000h (Hg) RoHS COMPLIANT III F CE **4+1** standard +extended **5** YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



HIGH EFFICIENCY LED STRIP- 200lm/W

99LED982WW

99LED982

99LED982CW

HIGH EFFICIENCY LED STRIP- 200LM/W

1040

LED STRIPS AND PROFILES



WARM WHITE 2700K
NEUTRAL WHITE 4000K
COOL WHITE 6400K
IP20
24V DC
HIGH EFFICIENCY

HIGH EFFICIENCY LED STRIP- 200lm/W

Catalogue number	Product category	Model	LEDs (pcs/m)	Watts / meter	Colour temp. (K)	Colour of light	Protection Raiting	Packing/Box (pcs)	Energy class
99LED982WW	C	LED-5630-WW	72pcs/m	9.6W/M	3000	warm white	IP20	5/100	A++A
99LED982	C	LED-5630-W	72pcs/m	9.6W/M	4000	neutral white	IP20	5/100	A++A
99LED982CW	C	LED-5630-CW	72pcs/m	9.6W/M	6500	cold white	IP20	5/100	A++A

Luminous efficiency: 1920 lm/m, 200lm/W, 10mm, self adhesive, mark cut.

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



COB LED STRIP

99LED980WW

99LED980

99LED980CW











COB LED STRIP

Catalogue number	Product category	Model	Watts / meter	Colour temp. (K)	Colour of light	Protection Raiting	Packing/Box (pcs)	Energy class
99LED980WW	C	LED-COB-WW	10W/M	3000	warm white	IP20	5/100	A++A
99LED980	C	LED-COB-W	10W/M	4000	neutral white	IP20	5/100	A++A
99LED980CW	C	LED-COB-CW	10W/M	6500	cold white	IP20	5/100	A++A
99LED981CW	C	LED-COB-CW	10W/M	6500	cold white	IP67	5/100	A++A

Luminous efficiency: 1000 lm/m, 10mm, self adhesive, mark cut.














In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



BENDABLE LED STRIP

99LED983WW

99LED983

99LED983CW

S-TYPE BENDABLE LED STRIP

1042

LED STRIPS AND PROFILES



S-TYPE BENDABLE LED STRIP

Catalogue number	Product category	Model	Watts / meter	Colour temp. (K)	Colour of light	Protection Rating	Packing/Box (pcs)	Energy class
99LED983WW	C	LED-SMD2835	12W/M	3000	warm white	IP20	5/100	A++A
99LED983	C	LED-SMD2835	12W/M	4000	neutral white	IP20	5/100	A++A
99LED983CW	C	LED-SMD2835	12W/M	6500	cold white	IP20	5/100	A++A

Luminous efficiency: 700 lm/m, 8mm, self adhesive, mark cut.



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



USB RGB LED STRIP AND CONTROLLER

99LED984RGB
99LEDDIMMER5V2



LED IP20 5V DC

USB RGB LED STRIP

Catalogue number	Product category	Model	LEDs (pcs/m)	Colour temp. (K)	Colour of light	Protection Rating	Packing/Box (pcs)	Energy class
99LED984RGB	C	LED-2835-RGB	30pcs/m	RGB	RGB	IP20	5/100	A++A

Driven by any devices with output 5V USB port- computer, desktop, laptop, TV, USB socket.

Width: 8mm, self adhesive, mark cut.



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

USB RGB LED STRIP

1043



IP20

CONTROLLER FOR LED STRIP 5V WITH REMOTE CONTROL

Catalogue number	Product category	Current (A)	Voltage (V)	Remote distance (m)	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99LEDDIMMER5V2	C	3x2A	5-24V DC	15	40	12	5	5/100	A++A

Remote controller battery: 3V: 1xCR2025- included




In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

LED STRIPS AND PROFILES



LED MODULES

- 99LEDMOD2430
- 99LEDMOD2440
- 99LEDMOD2460

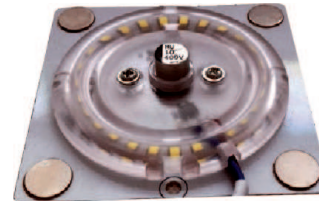

LED MODULES

- 99LEDMOD1230
- 99LEDMOD1240
- 99LEDMOD1260



L5050 LED MODULE

99LED360



LED MODULE



UNTIL SUPPLY
LAST

Catalogue number	Product category	Watt (W)	LEDs (pcs)	LED Type	Colour temp. (K)	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99LED360	F	0,72	3	SMD5050	5500	78	14	7.5	1/2000	A++A

Body: aluminium alloy | Light source: Epistar | LED recessed round spotlight COB. Easy installation due to handy clips.



LED MODULES EPSTAR

Catalogue number	Product category	Watt (W)	Lumen (lm)	Colour temp. (K)	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99LEDMOD1230	C	12	1140	3000	63	63	1/100	A++A
99LEDMOD1240	C	12	1140	4000	63	63	1/100	A++A
99LEDMOD1260	C	12	1140	6000	63	63	1/100	A++A
99LEDMOD2430	C	24	2280	3000	120	63	1/80	A++A
99LEDMOD2440	C	24	2280	4000	120	63	1/80	A++A
99LEDMOD2460	C	24	2280	6000	120	63	1/80	A++A

LED Chip: Epistar | Lens angle: 160° | Mounting: With magnet, for the lamps with iron plates, the modules have magnets that can be attached to the installation.

For the plastic lamps, the modules have double-sided conductive adhesive tape, which can be pasted and installed.

Application: Suitable for ceiling lamp, wall lamp, Bulkhead light etc.



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



RGBW BASE 120 + LENS
97LED120LRGB



BASE 120
97LED120WW
97LED120CW
97LED120RGB



RGBW BASE 65
97LED65RGB



RECHARGEABLE LED BASES

Catalogue number	Product category	Type	Battery type	LEDs (qty)	Colour temp. (K)	Diameter (mm)	Diameter1 (mm)	Height (mm)	Packing/Box (pcs)	Energy class
97LED65RGB	C	RGBW BASE 65	LI- 3.7V/ 800MAH	1+1	RGBW	85	68	65	1/50	A++A
97LED120LRGB	C	RGBW BASE 120 + LENS	LI- 3.7V/ 5200MAH	7+7	RGBW	120	95	58	1/36	A++A
97LED120WW	C	WW BASE 120	LI- 3.7V/ 5200MAH	12	3000	120	102	73	1/36	A++A
97LED120CW	C	CW BASE 120	LI- 3.7V/ 5200MAH	12	5500	120	102	73	1/36	A++A
97LED120RGB	C	RGBW BASE 120	LI- 3.7V/ 5200MAH	9+9	RGBW	120	102	73	1/36	A++A

Remote control



Charger




Input Voltage: 100-240VAC, 50/60Hz | Output Voltage: 5V 1A | Charging time: 6h | Discharging time: 10-12h

All LED bases are equipped with remote control and charger German type



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

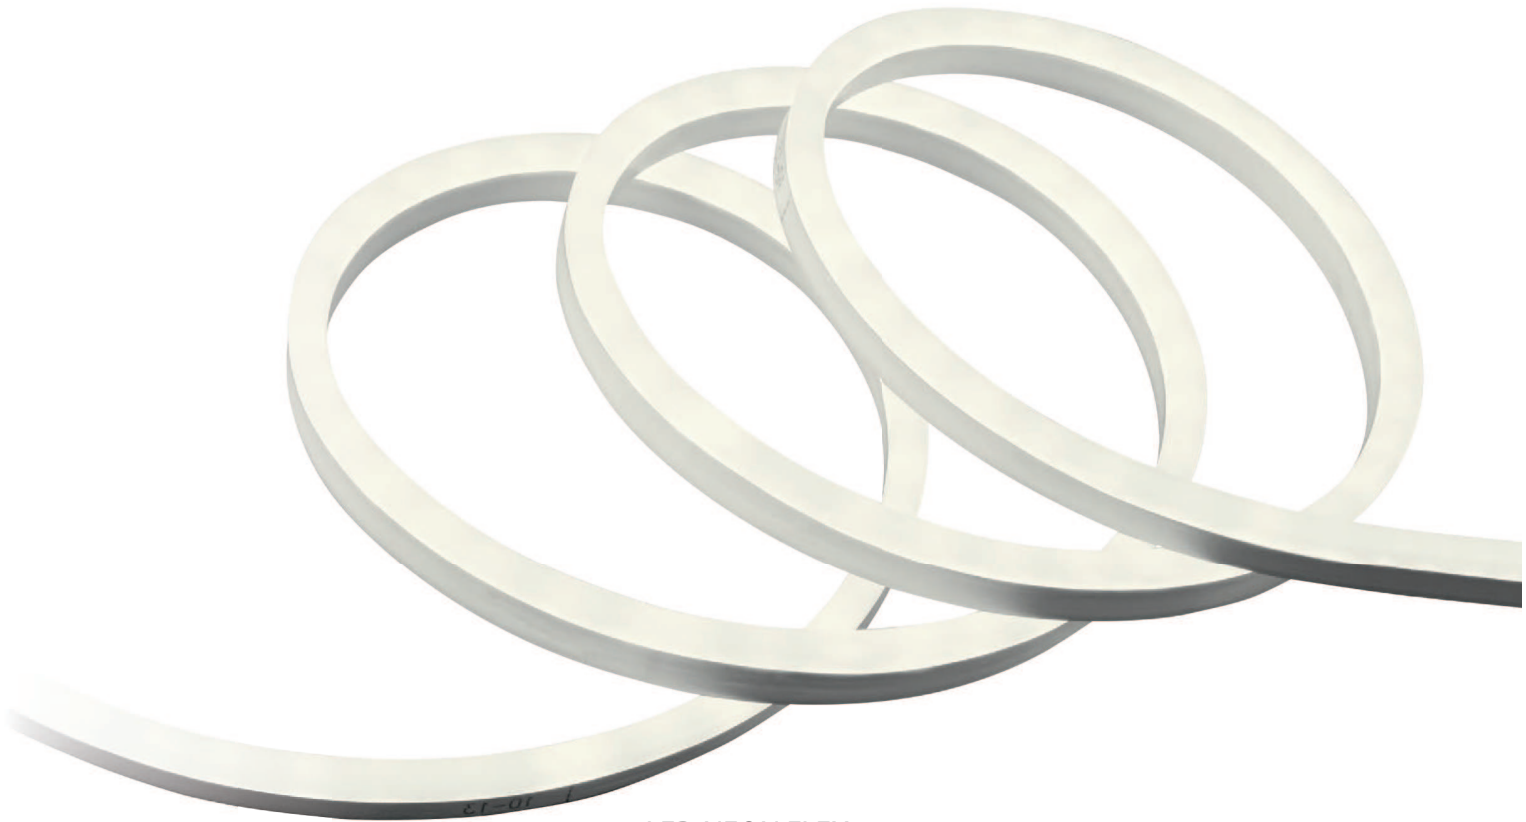

LED NEON FLEX


99LED950

99LED951



LED NEON FLEX

Catalogue number	Product category	Watts / meter	Colour temp. (K)	Colour of light	Protection rating	Packing (m)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99LED950	C	12W/M	2700-3000	warm white	IP 65	10	10	16	10/500	A++A
99LED951	C	12W/M	6000-6500	cold white	IP 65	10	10	16	10/500	A++A
99LED952	C	12W/M	-	pink	IP 65	10	10	16	10/500	A++A
99LED953	C	12W/M	380-440	violet	IP 65	10	10	16	10/500	A++A
99LED954	C	12W/M	520-525	green	IP 65	10	10	16	10/500	A++A
99LED955	C	12W/M	465-470	blue	IP 65	10	10	16	10/500	A++A
99LED956	C	12W/M	620-630	red	IP 65	10	10	16	10/500	A++A
99LED957	C	12W/M	587-592	yellow	IP 65	10	10	16	10/500	A++A
99LED958	C	12W/M	-	RGB	IP 65	10	10	19.5	10/500	A++A

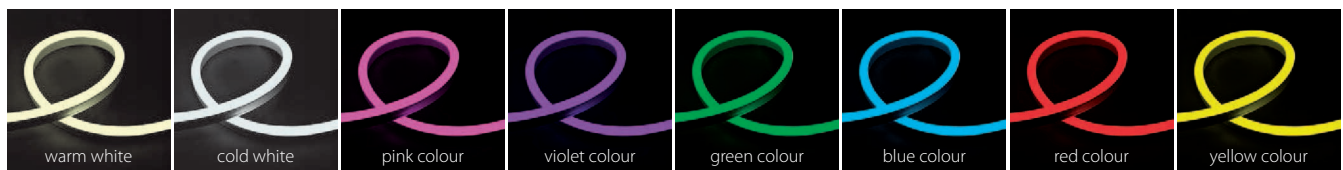

Luminous efficiency: 18-20 lm/LED, mark cut 1m.

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



CAPS FOR LED NEON FLEX

99ACC73



POWER CABLE FOR LED RGB NEON FLEX

99ACC77



FIXING BRACKET FOR LED NEON FLEX

99ACC72



POWER CABLE FOR LED NEON FLEX

99ACC76



CONNECTOR FOR RGB COLOR LED NEON FLEX

99ACC75



CONNECTOR FOR SINGLE COLOR LED NEON FLEX

99ACC74




ACCESSORIES FOR LED NEON FLEX



Catalogue number	Product category	Model	Packing/Box (pcs)
99ACC72	C	Fixing bracket for Led Neon Flex	0/500
99ACC73	C	Caps for Led Neon Flex	1/500
99ACC74	C	Connector for single color Led Neon Flex	0/500
99ACC75	C	Connector for RGB color Led Neon Flex	0/500
99ACC76	C	Power cable for Led Neon Flex	0/500
99ACC77	C	Power cable for Led RGB Neon Flex	0/500



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

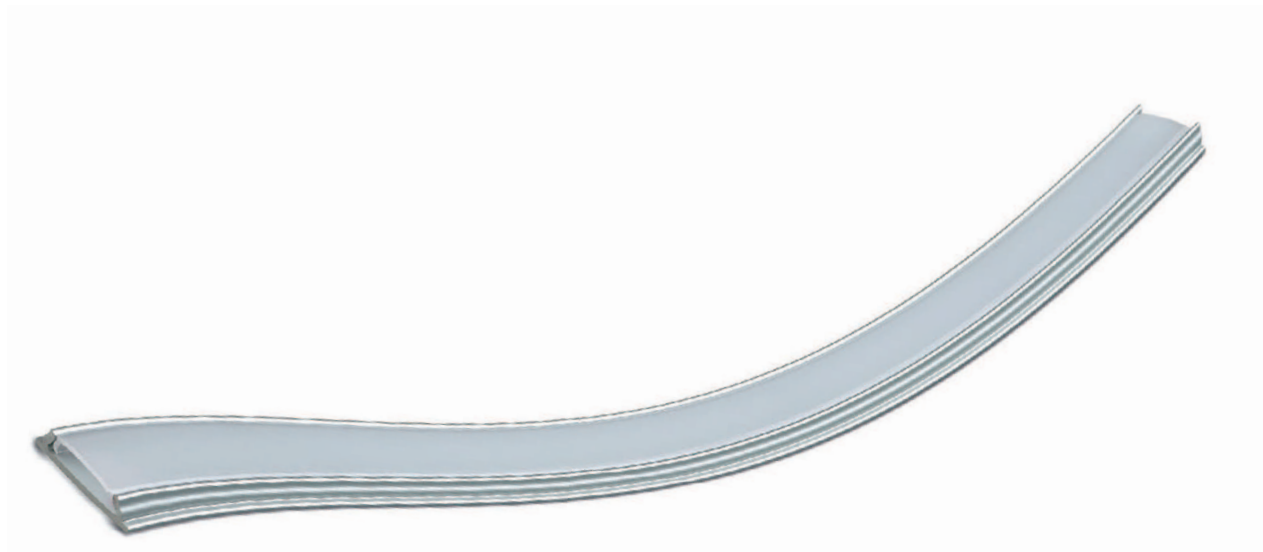

FLEXIBLE ALUMINIUM PROFILE



99ACC07FL



IP20

FLEXIBLE ALUMINIUM PROFILE FOR LED STRIPS & ACCESSORIES

Catalogue number	Product category	Model	Description	Length (m)	Dimension A (mm)	Dimension B (mm)	Dimension C (mm)	Packing/Box (pcs)
99ACC07FL	C	ELM6063/1-1000	LED profile	2	13.8	19	5	1/1
99ACC78	C	ELM6063/1-connector	Fixing bracket					1/1
99ACC51	C	Suspension wire	Suspension wire without console					1/1



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



DP61
99ACC61



DP62
99ACC62



DP63
99ACC63



DP64
99ACC64



DP65
99ACC65








IP20

LED PROFILES FOR DRYWALL

Catalogue number	Product category	Model	Description	Length (m)	Dimension A (mm)	Dimension B (mm)	Dimension C (mm)	Packing/Box (pcs)
99ACC61	C	DP61	Inside corner aluminum LED profile for recessed mounting in drywall	2	9.7	12.1	10	1/50
99ACC62	C	DP62	Outside corner aluminum LED profile for recessed mounting in drywall	2	9.7	-	10	1/20
99ACC63	C	DP63	Aluminum LED profile for recessed mounting in drywall	2	19.04	27.76	12.2	1/25
99ACC65	C	DP65	Aluminum LED profile for recessed mounting in drywall	2	28.58	36.91	12.2	1/21
99ACC64	C	DP64	Connectors for aluminum LED profiles DP63 and DP65	-	-	-	-	1/21

Frosted PC cover with high light transparency | Aluminium Extrusion 2mm with Acid Sand Oxidation treatment on the surface | No mechanical line




In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



DP67
99ACC67



DP66
99ACC66



DP70
99ACC70




DP68
99ACC68



DP69
99ACC69



OUTSIDE CLIP
99ACC71



SUSPENSION WIRE
99ACC54






IP20

LED PROFILES

Catalogue number	Product category	Model	Description	Length (m)	Dimension A (mm)	Dimension B (mm)	Dimension C (mm)	Packing/Box (pcs)
99ACC66	C	DP66	Base profile	2	40.1	50	35	1/32
99ACC67	C	DP67	Replaceable profile for mounting on DP66 or DP70	2	19.04	17.74	40	1/132
99ACC68	C	DP68	End cap	-	-	-	-	1/200
99ACC69	C	DP69	Connectors for aluminum LED profiles DP66 and DP70	-	-	-	-	1/50
99ACC70	C	DP70	Fixing bracket for aluminum LED profiles DP67	-	-	-	-	1/25
99ACC71	C	DP71	Outside Clip for suspension wire and LED profiles DP66 and DP70	-	-	-	-	1/50
99ACC54	C		Installation Suspension Wire for LED profile	-	-	-	-	1/1

Frosted PC cover with high light transparency | Aluminium Extrusion 2mm with Acid Sand Oxidation treatment on the surface | No mechanical line




In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.




ACC01 Silicone clips for LED strip.

99ACC01

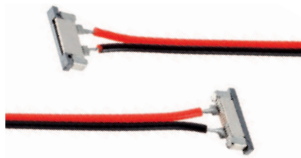

ACC02 One colour LED strip connector, 150mm cable

99ACC02

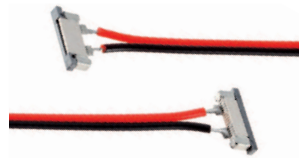

ACC021 CONNECTOR FOR 8mm ONE COLOR LED STRIP, 150mm cable

99ACC021



ACC02 One colour LED strip connector, 150mm cable

99ACC03



ACC05 One colour LED strip connector.

99ACC05



ACC051 CONNECTOR FOR 8mm ONE COLOR LED STRIP.

99ACC051



ACC06 RGB LED strip connector.

99ACC06



Female connector with cable 15cm, white

99ACC19



4pin connector with cable 20cm, white

99ACC20



FRONT CAPS for LED strip

SMD3528 IP65
99LED450



FRONT CAPS for LED strip

SMD5050 IP65
99LED452



FRONT CAPS for RGB LED strip

SMD5050 IP65
99LED454



END CAPS for LED strip

SMD3528 IP65
99LED451



END CAPS for LED strip

SMD5050 IP65
99LED453



END CAPS for RGB LED strip

SMD5050 IP65
99LED455



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ELM718/1

99ACC07
99ACC08



ELM718/2

99ACC11
99ACC12



ELM9012

99ACC14
99ACC15

PROFILES AND ACCESSOIRES FOR LED ST



PVC END CAP

99ACC16



FIXING BRACKET

99ACC17



PVC END CAP

99ACC13



PVC END CAP

99ACC09



FIXING BRACKET

99ACC10

IP20




PROFILES AND ACCESSOIRES FOR LED STRIP

Catalogue number	Product category	Model		Width (mm)	Height (mm)	Packing/Box (pcs)
99ACC07	C	ELM718/1-1000	Aluminium profile for LED strip with matt PVC cover-1m	15	6	1/50
99ACC08	C	ELM718/1-2000	Aluminium profile for LED strip with matt PVC cover-2m	15	6	1/50
99ACC09	C	ELM718/1-end cap	PVC end cap	-	-	1/400
99ACC10	C	ELM718/1-connector	Fixing bracket	-	-	1/1000
99ACC11	C	ELM718/2-1000	Aluminium profile for LED strip with matt PVC cover-1m	15	6	1/50
99ACC12	C	ELM718/2-2000	Aluminium profile for LED strip with matt PVC cover-2m	15	6	1/50
99ACC13	C	ELM718/2-end cap	PVC end cap	-	-	1/1000
99ACC14	C	ELM9012/2-1000	Aluminium profile for LED strip with matt PVC cover-1m	16	16	1/50
99ACC15	C	ELM9012/2-2000	Aluminium profile for LED strip with matt PVC cover-2m	16	16	1/50
99ACC16	C	ELM9012/2-end cap	PVC end cap	-	-	1/1000
99ACC17	C	ELM9012/1-connector	Fixing bracket	-	-	1/1500



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.


ELM6220/1
99ACC23




ELM6220/2
99ACC26



ELM950/1
99ACC28

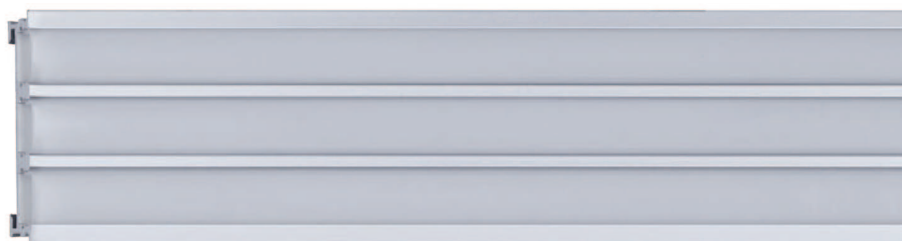

ELM950/2
99ACC31

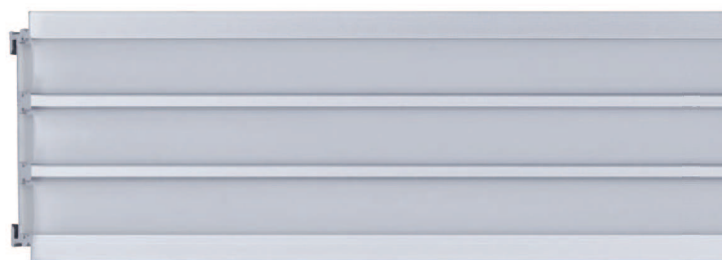

PVC END CAP

99ACC24

99ACC27



PVC END CAP

99ACC32

99ACC29



FIXING BRACKET

99ACC30



FIXING BRACKET

99ACC25



PROFILES AND ACCESSORIES

IP20

PROFILES AND ACCESSOIRES FOR LED STRIP

Catalogue number	Product category	Model		Width (mm)	Height (mm)	Packing/Box (pcs)
99ACC23	C	ELM6220/1-1000	Aluminium profile for LED strip with matt PVC cover-1m	23,8	6	1/50
99ACC24	C	ELM6220/1-end cap	PVC end cap	-	-	1/500
99ACC25	C	ELM6220/1-connector	Fixing bracket	-	-	400
99ACC26	C	ELM6220/2-1000	Aluminium profile for LED strip with matt PVC cover-1m	23,8	6	1/50
99ACC27	C	ELM6220/2-end cap	PVC end cap	-	-	1/500
99ACC31	C	ELM950/2-1000	Aluminium profile for LED strip with matt PVC cover-1m	49,2	6	1/1
99ACC32	C	ELM950/2-end cap	PVC end cap	-	-	1/500
99ACC28	C	ELM950/1-1000	Aluminium profile for LED strip with matt PVC cover-1m	56,6	6	1/20
99ACC29	C	ELM950/1-end cap	PVC end cap	-	-	1/500
99ACC30	C	ELM950/1-connector	Fixing bracket	-	-	1/150

1053

LED STRIPS AND PROFILES



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



**24 KEY
IR CONTROLLER**
99RGBCR3



**4 KEY
RF CONTROLLER**
99RGBCONTROL



**24 KEY
IR CONTROLLER**
99RGBCONTROL1



**RGBW 4 WAYS
CONTROLLER**
99RGB4W

IP20



CONTROLLERS FOR RGB/RGBW STRIPS

Catalogue number	Product category	Model	Current (A)	Voltage (V)	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)
99RGBCONTROL	C	RGB controller 7 stationary colours and 4 dynamic modes with regulation	4A (each channel)	12-24V DC	128	64	25	1/100
99RGB4W	C	RGBW 4 ways controller with 20 automatical changing modes to choose	4A (each channel)	12-24V DC	110	52	20	1/50
99RGBCR3	C	RGB controller 16 stationary colour and 4 dynamic modes with regulation	4A (each channel)	12-24V DC	128	64	25	1/50
99RGBCONTROL1	C	RGB controller 16 stationary colour and 4 dynamic modes with regulation	2A (each channel)	12V DC	60	35	25	1/100



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



Wireless Mini Single color controller
99LEDDIMMER1



Wireless Mini RGB controller
99LEDDIMMER2



RGB AMPLIFIER
99RGBAMPLIFIER



44 KEY IR CONTROLLER
99RGBCONTROL2

POWER SUPPLIES AND CONTROLS

IP20



POWER SUPPLIES AND CONTROLS

Catalogue number	Product category	Model	Current (A)	Voltage (V)	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)
99RGBCONTROL2	C	RGB controller 20 stationary colour and 6 dynamic modes with regulation and RGB mixer mode.	2A (each channel)	12V DC	60	35	25	1/50
99RGBAMPLIFIER	C	RGB AMPLIFIER	4A (each channel)	12-24V DC	107	65	25	1/100
99LEDDIMMER1	C	Wireless Mini Single color controller	5A	5-24V DC	40	12	5	1/250
99LEDDIMMER2	C	Wireless Mini RGB controller	3x2A	5-24V DC	40	12	5	1/250

99LEDDIMMER1 - 10-level Dimmer; Auto Save Function; Output power: 5V<30W; 12V<72W

99LEDDIMMER2 - Shortcuts: Directly switch to 100%, 80%, 60%, 40%, 20% or 10% of full brightness; Output power: 5V<60W; 12V<144W



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



48V MW VOLTAGE DRIVERS FOR
MAGNET TRACK LIGHT

99SETDCMW100/IP20
99SETDCMW200/IP20



IP20

48V DC

48V MW VOLTAGE DRIVERS FOR MAGNET TRACK LIGHT

Catalogue number	Product category	Model	Watt (W)	IP code	Voltage Uin / Uout	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)
99SETDCMW100/IP20	C	SETDC100	100	IP20	230V AC / 48V DC	159	97	38	1
99SETDCMW200/IP20	C	SETDC200	200	IP20	230V AC / 48V DC	215	115	50	1



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SETDC CONSTANT VOLTAGE DRIVERS

- 99SETDC12PVC
- 99SETDC24PVC



SETDC CONSTANT VOLTAGE DRIVERS

- 99SETDC15IP20
- 99SETDC36IP20
- 99SETDC60IP20
- 99SETDC100IP20
- 99SETDC150IP20
- 99SETDC200IP20
- 99SETDC250IP20
- 99SETDC360IP20



SETDC CONSTANT VOLTAGE DRIVERS

- 99SETDC30IP67
- 99SETDC60IP67
- 99SETDC100IP67
- 99SETDC150IP67
- 99SETDC200IP67



IP20

IP67

12V DC

SETDC CONSTANT ELMARK VOLTAGE DRIVERS FOR LED

Catalogue number	Product category	Model	Watt (W)	IP code	Voltage Uin / Uout	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)
99SETDC12PVC	C	SETDC12PVC	12	IP20	230V AC / 12V DC	90	48	34	1/50
99SETDC24PVC	C	SETDC24PVC	24	IP20	230V AC / 12V DC	115	48	34	1/100
99SETDC15IP20	C	SETDC15	15	IP20	230V AC / 12V DC	70	39	31	1/250
99SETDC36IP20	C	SETDC36	36	IP20	230V AC / 12V DC	85	58	38	1/100
99SETDC60IP20	C	SETDC60	60	IP20	230V AC / 12V DC	110	78	38	1/50
99SETDC100IP20	C	SEDC100	100	IP20	230V AC / 12V DC	159	98	38	1/24
99SETDC150IP20	C	SETDC150	150	IP20	230V AC / 12V DC	199	98	38	1/28
99SETDC200IP20	C	SETDC200	200	IP20	230V AC / 12V DC	200	110	50	1/24
99SETDC250IP20	C	SETDC250	250	IP20	230V AC / 12V DC	200	110	50	1/24
99SETDC360IP20	C	SETDC360	360	IP20	230V AC / 12V DC	200	110	50	1/24
99SETDC30IP67	C	SETDC30I	30	IP67	230V AC / 12V DC	200	30	20	1/60
99SETDC60IP67	C	SETDC60I	60	IP67	230V AC / 12V DC	178	68	34	1/20
99SETDC100IP67	C	SETDC100I	100	IP67	230V AC / 12V DC	250	72	45	1/10
99SETDC150IP67	C	SETDC150I	150	IP67	230V AC / 12V DC	250	128	60	1/10
99SETDC200IP67	C	SETDC200I	200	IP67	230V AC / 12V DC	200	120	53	1/5



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



XSET12DC CONSTANT STELLAR VOLTAGE DRIVERS

9XSETDC150IP20



XSET12DC CONSTANT STELLAR VOLTAGE DRIVERS

9XSETDC60IP20
9XSETDC120IP20

XSET12DCCONSTANTSTELLARVOLTAGEDRIVERSFORLED

1058

ACCESSORIES



IP20


12V DC

XSET12DC CONSTANT STELLAR VOLTAGE DRIVERS FOR LED

Catalogue number	Product category	Model	Watt (W)	IP code	Voltage Uin / Uout	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)
9XSETDC60IP20	C	XSETDC60	60	IP20	176/264V AC - 12V DC	150	40	33	1/100
9XSETDC120IP20	C	XSETDC120	120	IP20	176/264V AC - 12V DC	188	47	36	1/50
9XSETDC150IP20	C	XSETDC150	150	IP20	176/264V AC - 12V DC	199	98	42	1/28



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

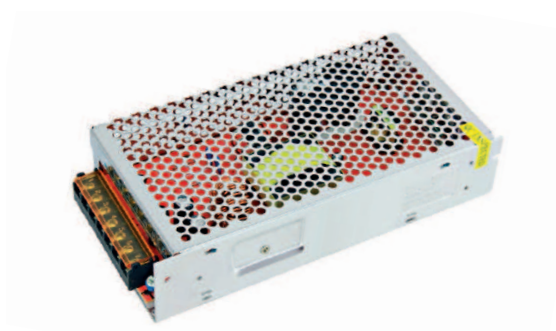

STELLAR SET24DC CONSTANT VOLTAGE DRIVERS

STELLAR SETDC 24V CONSTANT VOLTAGE DRIVERS IP20/66

1059

ACCESSORIES

IP20 **24V DC**



STELLAR SETDC 24V CONSTANT VOLTAGE DRIVERS IP20/66

Catalogue number	Product category	Model	Watt (W)	IP code	Voltage Uin / Uout	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)
99XSETDC6024IP20	C	XSET24DC60	60	20	AC180-240V - 24V DC	110	78	36	1/50
99XSETDC10024IP20	C	XSET24DC100	100	20	AC180-240V - 24V DC	130	98	42	1/50
99XSETDC15024IP20	C	XSET24DC150	150	20	AC180-240V - 24V DC	160	98	50	1/40




In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SET24DC CONSTANT VOLTAGE DRIVERS IP20

- 99SETDC2524IP20
- 99SETDC6024IP20
- 99SETDC10024IP20
- 99SETDC15024IP20

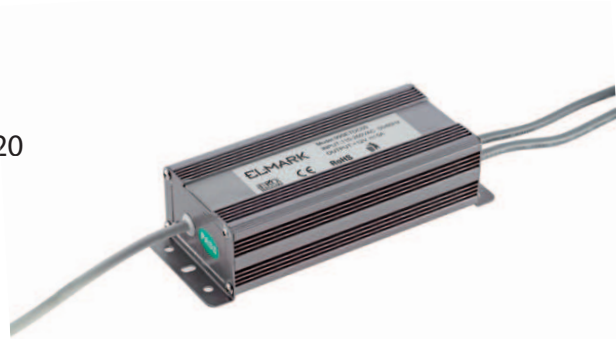

SET24DC CONSTANT VOLTAGE DRIVERS IP66

- 99SETDC6024IP66
- 99SETDC10024IP66
- 99SETDC15024IP66

SETDC 24V CONSTANT VOLTAGE DRIVERS IP20/66

1060



IP20

IP66

24V DC

SETDC 24V CONSTANT VOLTAGE DRIVERS IP20/66

Catalogue number	Product category	Model	Watt (W)	IP code	Voltage Uin / Uout	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)
99SETDC2524IP20	C	SET24DC25	25	20	AC180-240V - 24V DC	85	58	38	1/100
99SETDC6024IP20	C	SET24DC60	60	20	AC180-240V - 24V DC	104	82	30	1/90
99SETDC10024IP20	C	SET24DC100	100	20	AC180-240V - 24V DC	137	97	30	1/75
99SETDC15024IP20	C	SET24DC150	150	20	AC180-240V - 24V DC	164	97	30	1/45
99SETDC6024IP66	C	SET24DC60	60	66	AC100-240V - 24V DC	180	56	34	1/20
99SETDC10024IP66	C	SET24DC100	100	66	AC100-240V - 24V DC	210	72	42	1/20
99SETDC15024IP66	C	SET24DC150	150	66	AC100-240V - 24V DC	210	112	56	1/8


ACCESSORIES



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SETDC 12V / 24V CONSTANT VOLTAGE
DIMMABLE DRIVERS IP20

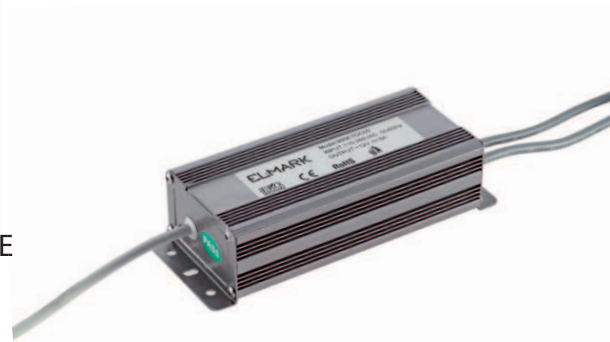

SETDC 12V / 24V CONSTANT VOLTAGE
DIMMABLE DRIVERS IP66



IP20 **IP66** **12V DC** 

SETDC CONSTANT VOLTAGE DIMMABLE DRIVERS

Catalogue number	Product category	Model	Watt (W)	Output Voltage (V DC)	IP code	Voltage Uin / Uout	Length (mm)	Width (mm)	Height (mm)	Packing/ Box (pcs)
99SETDC6012IP20D	C	SET12DC60D	60	12	20	AC180-240V - 12V DC	128	98	35	1/30
99SETDC10012IP20D	C	SET12DC100D	100	12	20	AC180-240V - 12V DC	160	98	38	1/25
99SETDC15012IP20D	C	SET12DC150D	150	12	20	AC180-240V - 12V DC	198	110	50	1/20
99SETDC6012IP66D	C	SET12DC60D	60	12	66	AC100-240V - 12V DC	210	70	40	1/30
99SETDC10012IP66D	C	SET12DC100D	100	12	66	AC100-240V - 12V DC	210	70	40	1/25



IP20 **IP66** **24V DC** 

SETDC CONSTANT VOLTAGE DIMMABLE DRIVERS

Catalogue number	Product category	Model	Watt (W)	Output Voltage (V DC)	IP code	Voltage Uin / Uout	Length (mm)	Width (mm)	Height (mm)	Packing/ Box (pcs)
99SETDC6024IP20D	C	SET24DC60D	60	24	20	AC180-240V - 24V DC	128	98	35	1/30
99SETDC10024IP20D	C	SET24DC100D	100	24	20	AC180-240V - 24V DC	160	98	38	1/25
99SETDC15024IP20D	C	SET24DC150D	150	24	20	AC180-240V - 24V DC	198	110	50	1/20
99SETDC6024IP66D	C	SET24DC60D	60	24	66	AC100-240V - 24V DC	210	70	40	1/30
99SETDC10024IP66D	C	SET24DC100D	100	24	66	AC100-240V - 24V DC	210	70	40	1/25

   **3+0** standard +extended **3** YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ELMARK POWER SUPPLIES FOR LED PANELS



SET 12V/24V
CONSTANT VOLTAGE DRIVERS IP67



IP20 **IP67** **12V DC** **24V DC**

ELMARK POWER SUPPLIES FOR LED PANELS / DRIVERS

Catalogue number	Product category	Dimmable	Watt (W)	Input voltage (V)	Output voltage (V)	Output current (mA)	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)
99DRIVERPN6	C	No	6W	220-240V	12-25V DC	300mA	68	33	22	1/200
99DRIVERPN12	C	No	12W	220-240V	24-50V DC	300mA	89	38	22	1/200
99DRIVERPN18	C	No	18W	220-240V	36-75V DC	300mA	89	38	22	1/200
99DRIVERPN24	C	No	24W	220-240V	50-84V DC	300mA	89	38	22	1/200
99DRIVERPN40	C	No	40W	220-240V	30-42V DC	1000mA	142	42	30	1/20
99DRIVERPN48D	C	Yes	48W	220-240V	30-42V DC	1050mA	140	48	30	1/20
99SETDC1224TIP67	C	No	24W	AC180-240V	12V DC		266	20	22	1/50
99SETDC1248TIP67	C	No	48W	AC180-240V	12V DC		285	20	22	1/50
99SETDC2424TIP67	C	No	24W	AC180-240V	24V DC		266	20	22	1/50
99SETDC2448TIP67	C	No	48W	AC180-240V	24V DC		285	20	22	1/50

* output DC female connector



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MAGNETIC BALLAST FOR COMPACT FLUORESCENT LAMPS (TC-D)

990153008



ELECTRONIC BALLAST FOR FLUORESCENT LAMPS



MAGNETIC BALLAST FOR FLUORESCENT LAMPS - TYPE T8

990153818

IP20



UNTIL SUPPLY LAST

POWER SUPPLIES

Catalogue number	Product category	Model	Watt (W)	Current (A)	cos φ	Uinput	Uoutput	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)
990153818	F	BALLAST 18W	1X18W	0,370	0.32	230VAC	230VAC	155	41	32	1/50
990153008	F	BALLAST	18	0,220	0.48	230VAC	230VAC	105	41	26	1/50
99EB0218	F	EB218	2X18	T8	-	-	-	274	27	27	1/50
99EB0418	F	EB418	4X18	T8	-	-	-	330	33	29	1/50
99EB0114	F	EB114	1X14	T5	-	-	-	274	27	27	1/50
99EB0214	F	EB214	2X14	T5	-	-	-	250	25	25	1/50
99EB0128	F	EB128	1X28	T5	-	-	-	274	27	27	1/50
99EB0228	F	EB228	2X28	T5	-	-	-	250	25	25	1/50
99EB0135	F	EB135	1X35	T5	-	-	-	320	30	27	1/50

-230V 50Hz

EEL= B2

CE

2+0
standard +extended

2

YEAR TOTAL WARRANTY



**POWER SUPPLY
for LED bulbs 12V**

- 99DRIVER12
- 99DRIVER18
- 99DRIVER24
- 99DRIVER36

POWER SUPPLIES

1064

ACCESSORIES

IP20



POWER SUPPLIES

Catalogue number	Product category	Model	Watt (W)	Current (A)	Uinput	Uoutput	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)
99DRIVER12	C	SETDC12	12	1	230VAC	12V DC	80	32	22	1/250
99DRIVER18	C	SETDC18	18	1,5	230VAC	12V DC	95	45	28	1/100
99DRIVER24	C	SETDC24	24	2	230VAC	12V DC	115	45	28	1/100
99DRIVER36	C	SETDC36	36	2	230VAC	12V DC	140	45	28	1/100



3+0
standard
+extended



3 YEAR TOTAL WARRANTY



**ELECTRONIC BALLAST FOR
FLUORESCENT LAMPS - TYPE PLC4P**

99EB0213PL
99EB0218PL



**MAGNETIC BALLAST STELLAR
FOR FL LAMP T8**

990118W
990136W



**MAGNETIC BALLAST STELLAR
FOR PLC2P LAMP**

9913142
9913143

POWER SUPPLIES

1065

ACCESSORIES

IP20



UNTIL SUPPLY
LAST

POWER SUPPLIES

Catalogue number	Product category	Model	Watt (W)	Lamp type	Voltage	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)
9913142	F	BALLAST	18	PLC2P	230V AC	155	42	28	1/1
9913143	F	BALLAST	36	PLC2P	230V AC	155	42	28	1/1
99EB0213PL	F	EB213PL	2X13W	PLC4P	230V AC	103	67	30	1/100
99EB0218PL	F	EB218PL	2X18W	PLC4P	230V AC	103	67	30	1/100
990118W	F	BALLAST	18	EST 3F-T8	230V AC	160	43	30	1/1
990136W	F	BALLAST	36	EST 3F-T8	230V AC	160	43	30	1/1

-230V 50Hz

EEL=B2

CE

2+0
standard
+extended

2

YEAR TOTAL
WARRANTY



LAMP HOLDER

99292



LAMP HOLDER E14

99296




LAMP HOLDER E40

99298



LAMP HOLDER E27

99294



LAMP HOLDER E27 with support

99295



LAMP HOLDER

99293

LAMP HOLDERS

1066

ACCESSORIES

IP20



LAMP HOLDERS

Catalogue number	Product category	Lamp category	Length of the cable:	Material	Diameter (mm)	Height (mm)	Length (mm)	Packing/Box (pcs)
99292	C	GU 10	140 mm	ceramic	27	16	-	1/1000
99293	C	G 4 / G 5.3 / GY 6.35	90 mm	ceramic	16	10	-	1/2000
99296	C	E 14	-	ceramic	33	20	44	1/400
99298	C	E 40	-	ceramic	56	23	72	1/100
99294	C	E 27	-	ceramic	42	-	48	1/400
99295	C	E 27	-	ceramic	-	-	48	1/400



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LAMP BASE

99199



LAMP BASE

99200



TWIN SOCKET LAMP HOLDER

99198



LAMP HOLDER ADAPTORS TO E27

192168



LAMP HOLDER ADAPTORS TO E27

192169



IP20

LAMP BASES / TWIN SOCKET LAMP HOLDER / ADAPTORS

Catalogue number	Product category	Type	Lamp	Rated current	Material	Diameter (mm)	Length (mm)	Section of power supply conductors	Packing/Box (pcs)
99199	C	straight	E27	4A	PET	63	40	0.5-2.5mm ²	1/250
99200	C	oblique	E27	4A	PET	78	38	0.5-2.5mm ²	1/250
99198	C	E27-2xE27	E27	4A	Iron + PBT	76	74	0.5-2.5mm ²	1/300
192168	C	E40/E27	E27	4A	iron/plastic	78	45	0.5-2.5mm ²	15/500
192169	C	G24/E27	E27	4A	PBT+ copper	78	50	0.5-2.5mm ²	25/300



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



HANGING LAMP HOLDER

99194



HANGING LAMP HOLDER

99195



HANGING LAMP HOLDER

99196



HANGING LAMP HOLDER

99197

HANGING LAMP HOLDERS

1068

ACCESSORIES

IP20



HANGING LAMP HOLDERS

Catalogue number	Product category	Type	Lamp	Material	Diameter (mm)	Length (mm)	Section of power supply conductors	Packing/Box (pcs)
99194	C	screwless	E14	plastic	44	56,3	0.5-2.5mm ²	1/500
99195	C	screwless	E27	plastic	55	62,5	0.5-2.5mm ²	1/200
99196	C	screw	E27	bakelite	38.5	55	0.5-2.5mm ²	1/250
99197	C	screw	E27	bakelite	38.5	55	0.5-2.5mm ²	1/200



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



CABLE CONNECTOR IP68

31072



TERMINAL BOX IP44

31071



TERMINAL BOX IP65

31070

IP44 **IP65** **IP68**



WATERPROOF TERMINAL CONNECTORS

Catalogue number	Product category	Type	Material	Voltage (V)	Rated current (A)	Wiring Capacity (mm ²)	Packing/Box (pcs)
31071	C	Terminal box IP44	Polycarbonate	450	6	0.5-4.0	1/500
31070	C	Terminal box IP65	Polypropylene	450	10	0.5-2.5	1/500
31072	C	Cable connector IP68	Anti UV nylon	250	≤30A	0.5-2.5	1/500





ST42
99DS104



ST41
99DS103



ST02A
99DS100



ST40
99DS402



ST11
99DS403

INFRARED MOTION SENSORS

1070

SENSORS

IP40



INFRARED MOTION SENSORS

Catalogue number	Product category	Type	Detection range	Rated load	Detection distance	Colour body	Installation height	Length (mm)	Diameter 1 (mm)	Diameter 2 (mm)	Packing/Box (pcs)
99DS402	C	ST40	360°	800W (110-130V/AC); 1200W (220-240V/AC)	max. 6m	white	-	-	-	-	1/100
99DS403	C	ST11	180°	500W (110-130V/AC) 800W (220-240V/AC)	max. 12m	white	-	-	-	-	1/50
99DS100	C	ST02A	160°	ESL/LED - 100W, IL - 500W	max. 9m	white	1 - 1.8m	80	48.5	24.7	1/100
99DS104	C	ST42	360°	ESL/LED - 300W, IL - 1200W	max.6m	white	2.2 - 4m	75,6	76	100	1/50
99DS103	C	ST41	360°	ESL/LED - 300W, IL - 1200W	max.6m	white	2.2 - 4m	75,6	61,5	76	1/50

Time-Delay: 10sec ± 3sec to 7min ± 2min (adjustable) | Ambient light: <3 - 2000lux (adjustable) | Detection motion speed: 0.6 - 1.5m/s



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



INFRARED MOTION SENSOR ST24

99DS109



TOUCHING SENSOR ST125

99DS115



MICROWAVE SENSOR ST701F

99DS400



INFRARED MOTION SENSOR ST07

99DS101
99DS102



INFRARED MOTION SENSOR ST05CA

99DS110

IP40



MICROWAVE / INFRARED / TOUCHING

Catalogue number	Product category	Detection range	Rated load	Detection distance	Time-Delay	Ambient Light	Detection motion speed	Length (mm)	Width (mm)	Height (mm)	Diameter (mm)	Packing/Box (pcs)
99DS115	C	touch	ESL/LED - 200W, IL - 500W	-	-	-	-	89.7	40.2	16.8	-	1/100
99DS400	C	180°/360°	ESL/LED - 200W, IL - 500W	max. 15m	10s to 12min	<3 - 2000LUX	-	58	40.5	25.5	-	1/100
99DS109	C	120°/360°	ESL/LED - 200W, IL - 800W	max. 6m	5s, 30s, 1,3,5,8min	10 - 2000LUX	0.6-1.5m/s	55.8	34	24.6	-	1/100
99DS101	C	360°	ESL/LED - 300W, IL - 1200W	max. 6m	10s to 7min	<3 - 2000LUX	0.6-1.5m/s	-	-	58	115	1/50
99DS102	C	360°	ESL/LED - 300W, IL - 1200W	max. 6m	10s to 7min	<3 - 2000LUX	0.6-1.5m/s	-	-	58	115	1/50
99DS110	C	360°	ESL/LED - 300W, IL - 800W	max. 6m	10s to 15min	<3 - 2000LUX	0.6-1.5m/s	-	-	24.9	102	1/50



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



INFRARED MOTION SENSOR ST10A
99DS107



INFRARED MOTION SENSOR ST15
99DS108



IP40

INFRARED MOTION SENSOR ST10A / ST15

Catalogue number	Product category	Type	Detection range	Rated load	Detection distance	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)
99DS107	C	ST10A	180°	ESL - 300W, IL - 1200W	5-12m	white	87,4	120	144	1/30
99DS108	C	ST15	180°	ESL/LED - 300W, IL - 1200W	max.12m	white	80	117,2	31,5	1/50

Time-Delay: 10sec ± 3sec to 7min ± 2min (adjustable) | Ambient light: <3 - 2000lux (adjustable) | Detection motion speed: 0.6 - 1.5m/s | Installation height: 2.2 - 4m



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LIGHT-CONTROL SENSOR ST303
99DS300



LIGHT-CONTROL SENSOR ST300
99DS404



LIGHT-CONTROL SENSOR ST302
99DS301



LIGHT-CONTROL SENSORS ST306
99DS405



LIGHT-CONTROL SENSOR ST308
99DS302

IP44 **IP65**



LIGHT-CONTROL SENSORS

Catalogue number	Product category	Type	Rated current	Colour body	Ambient light	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)
99DS404	C	ST300	10A	white	3-500LUX(adjustable) IP44	35	70	108,6	1/50
99DS300	C	ST303	25A	white	<5 - 50lux (adjustable) IP44	70,5	78,3	-	1/50
99DS301	C	ST302	10A	white	<5 - 50lux (adjustable) IP44	76,7	63	-	1/100
99DS405	C	ST306	6A	white	<5 - 15lux (adjustable) IP44	100	200	-	1/100
99DS302	C	ST308	20A	white	<2 - 100lux (adjustable) IP65	35	66	90	1/100

99DS404 - Timer Built-in from 1-9 hours



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

A large, illuminated white pepper-shaped LED furniture piece is the central focus, sitting on a stone patio. The pepper is glowing from within, with a dark red stem. In the background, a swimming pool is lit with a bright blue light. The surrounding garden is dark, with a warm yellow light illuminating a tree and a lounge chair visible in the distance.

LED FURNITURE & DESIGN



PEPPER
97PEPPER27/NE



RECHARGEABLE LAMP PEPPER

Catalogue number	Product category	Type	Light source colour temp (K)	Body colour	Glowing in	Energy class
97PEPPER27/NE	D	LED lamp	3000	Neutral	Warm White	A+ A++-A
97PEPPER64/NE	D	LED lamp	5500	Neutral	Cold White	A+ A++-A
97PEPPERRGB/NE	D	LED lamp	RGBW	Neutral	RGBW	A+ A++-A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.

Material: Resin | Shockproof | Frost and heat resistant | UV resistant | Light source: Rechargeable LED bases | Dimensions: DxH (mm): 650x710



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



OSLO
970SLO27/NE



RECHARGEABLE LAMP OSLO

1076

RECHARGEABLE LAMP OSLO

Catalogue number	Product category	Type	Light source colour temp (K)	Body colour	Glowing in	Energy class
970SLO27/NE	D	LED lamp	3000	Neutral	Warm White	A+ A++→A
970SLO64/NE	D	LED lamp	5500	Neutral	Cold White	A+ A++→A
970SLORGB/NE	D	LED lamp	RGBW	Neutral	RGBW	A+ A++→A

LED FURNITURE

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.


Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases | Dimensions: DxH (mm): 600x430




In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.





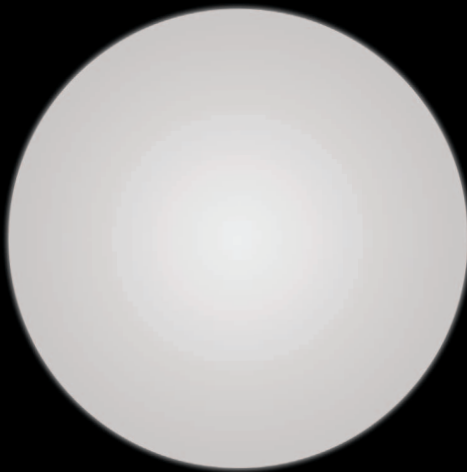

SPHERE

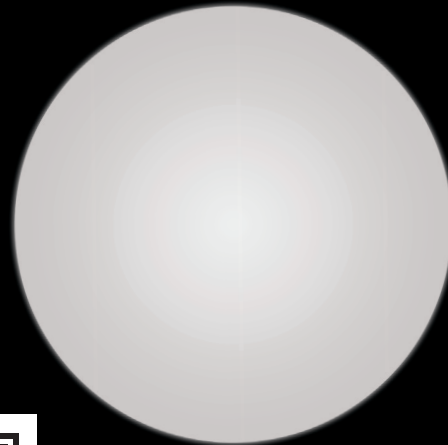

BALL

LED **IP54** **DIMMABLE**
RGBW



RECHARGEABLE LAMP BALL

Catalogue number TYPE 30	Product category	Catalogue number TYPE 60	Type	Light source colour temp. (K)	Body colour	Glowing in	Energy class
97BALL30RGB	D	97BALL60RGB	LED LAMP	RGBW	Neutral	RGBW	A+ A++→A


At our website www.elmarkholding.eu you would find a video clip showing each product lighted.

Material: LLDPE | All glowing products are equipped with remote control and charger German type | Light source: Rechargeable LED bases | Dimensions TYPE30: DxH(mm): 300x300; TYPE60: DxH (mm): 600x600



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

LED **IP65** **MADE IN ITALY** **DIMMABLE**
RGBW



RECHARGEABLE LAMP SPHERE

Catalogue number TYPE 30	Product category	Catalogue number TYPE 70	Type	Light source colour temp. (K)	Body colour	Glowing in	Energy class
97SPHERE3027/N	D	97SPHERE7027/N	LED LAMP	3000	Neutral	Warm White	A+ A++→A
97SPHERE3064/N	D	97SPHERE7064/N	LED LAMP	5500	Neutral	Cold White	A+ A++→A
97SPHERE30RGB/N	D	97SPHERE70RGB/N	LED LAMP	RGBW	Neutral	RGBW	A+ A++→A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.

Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases | Dimensions TYPE30: DxH(mm): 300x265; TYPE70: DxH (mm): 700x680



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.





JOUR
97JOUR27/NE

LED IP65 MADE IN ITALY DIMMABLE RGBW



RECHARGEABLE LAMP JOUR

Catalogue number	Product category	Type	Light source colour temp (K)	Body colour	Glowing in	Energy class
97JOUR27/NE	D	LED lamp	3000	Neutral	Warm White	A+ A++A
97JOUR64/NE	D	LED lamp	5500	Neutral	Cold White	A+ A++A
97JOURRGB/NE	D	LED lamp	RGBW	Neutral	RGBW	A+ A++A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.

Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases | Dimensions: LxWxH (mm): 300X300X350

RoHS CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.

RECHARGEABLE LAMP TOWER



TOWER
97TOWER27/NE

LED IP65 MADE IN ITALY DIMMABLE RGBW



RECHARGEABLE LAMP TOWER

Catalogue number	Product category	Type	Light source colour temp (K)	Body colour	Glowing in	Energy class
97TOWER27/NE	D	LED lamp	3000	Neutral	Warm White	A+ A++A
97TOWER64/NE	D	LED lamp	5500	Neutral	Cold White	A+ A++A
97TOWERRGB/NE	D	LED lamp	RGBW	Neutral	RGBW	A+ A++A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.

Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases | Dimensions: DxH: (mm): 330x1770

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.

1082

LED FURNITURE







FELICE
97FELICERGB/NE



RECHARGEABLE LAMP FELICE

Catalogue number	Product category	Type	Light source colour temp (K)	Body colour	Glowing in	Energy class
97FELICERGB/NE	D	LED lamp	RGBW	Neutral	RGBW	A+ A++ A

Rechargeable LED



Remote control



Charger




All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.

Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases | Dimensions: DxH: (mm): 450x1540



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.

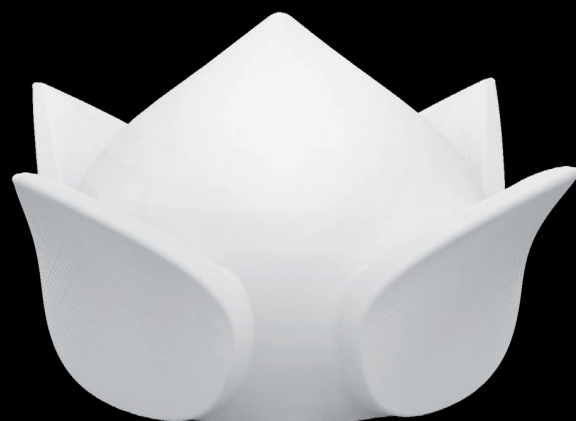

SHANGHAI
97SHANGHAI27/NE

RECHARGEABLE LAMP SHANGHAI



RECHARGEABLE LAMP SHANGHAI

Catalogue number	Product category	Type	Light source colour temp (K)	Body colour	Glowing in	Energy class
97SHANGHAI27/NE	D	LED lamp	3000	Neutral	Warm White	A+ A++ A
97SHANGHAI64/NE	D	LED lamp	5500	Neutral	Cold White	A+ A++ A
97SHANGHAIRGB/NE	D	LED lamp	RGBW	Neutral	RGBW	A+ A++ A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.

Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases | Dimensions: DxH (mm): 430x230

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.


1086

LED FURNITURE



BOCCA
97BOCCARGB/NE

RECHARGEABLE WALL LAMP BOCCA



RECHARGEABLE WALL LAMP BOCCA

Catalogue number	Product category	Type	Light source colour temp (K)	Body colour	Glowing in	Energy class
97BOCCARGB/NE	D	LED wall lamp	RGBW	Neutral	RGBW	A+ A++ A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.

Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases | Dimensions: LxWxH (mm): 400x85x400



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



ICE ROCK
97ICEROCK27/NE

RECHARGEABLE LAMP/CONTAINER ICE ROCK



LED IP65 MADE IN ITALY DIMMABLE RGBW

1088

RECHARGEABLE LAMP/CONTAINER ICE ROCK

Catalogue number	Product category	Type	Light source colour temp (K)	Body colour	Glowing in	Energy class
97ICEROCK27/NE	D	LED lamp/ container	3000	Neutral	Warm White	A+ A++→A
97ICEROCK64/NE	D	LED lamp/ container	5500	Neutral	Cold White	A+ A++→A
97ICEROCKRGB/NE	D	LED lamp/ container	RGBW	Neutral	RGBW	A+ A++→A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.

Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases | Dimensions: LxWxH: (mm): 580x430x500

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.

LED FURNITURE




GOSSET
Champagne
GOSSET

BELLAVISTA

GOSSET
Grand Cru
Rosé
CHAMPAGNE
REIMS - ITALIA



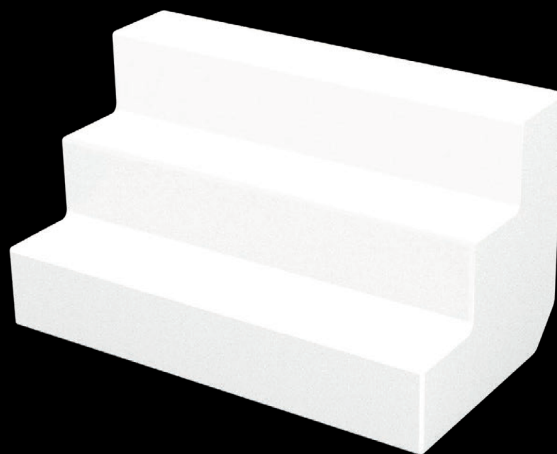

STAIRS
97STAIRS27/NE



RECHARGEABLE BOTTLES DISPLAY UNIT STAIRS

Catalogue number	Product category	Type	Light source colour temp (K)	Body colour	Glowing in	Energy class
97STAIRS27/NE	D	LED bottles display unit	3000	Neutral	Warm White	A+ A++ A
97STAIRS64/NE	D	LED bottles display unit	5500	Neutral	Cold White	A+ A++ A
97STAIRSRGB/NE	D	LED bottles display unit	RGBW	Neutral	RGBW	A+ A++ A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.

Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases | Dimensions: LxWxH (mm): 600X340X340


In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



MALLORCA WORKSTATION
CORNER
97MALLORCAC27/N



MALLORCA
WORKSTATION
97MALLORCA27/N



RECHARGEABLE BAR MALLORCA

Catalogue number WORKSTATION	Product category	Catalogue number CORNER	Light source colour temp. (K)	Body colour	Glowing in	Energy class
97MALLORCA27/N	D	97MALLORCAC27/N	3000	Neutral	Warm White	A+ A++A
97MALLORCA64/N	D	97MALLORCAC64/N	5500	Neutral	Cold White	A+ A++A
97MALLORCARGB/N	D	97MALLORCACRGB/N	RGBW	Neutral	RGBW	A+ A++A

Rechargeable LED



Remote control



Charger




All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.


Material: Resin | Shockproof | Frost and heat resistant | UV Resistant

Light source: Rechargeable LED bases

Dimensions WORKSTATION: LxWxH (mm): 1700x920x1100; CORNER WORKSTATION: LxWxH (mm): 1810x800x1100

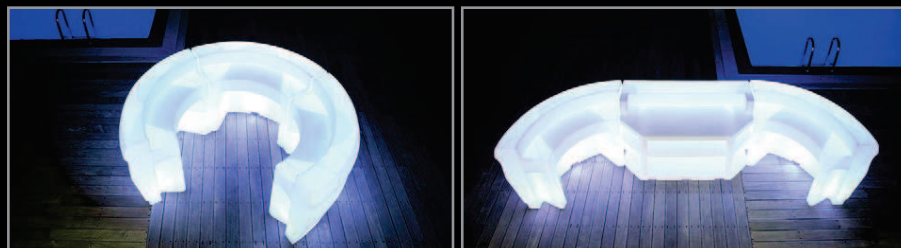


In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.

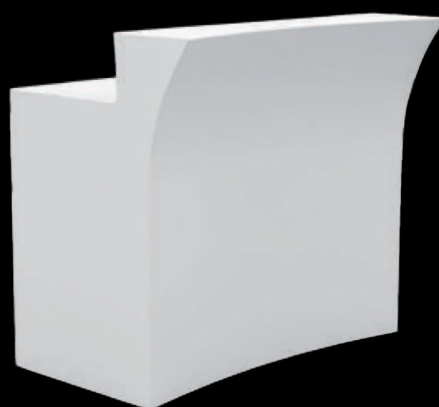

BALI
97BALIRGB/NE

RECHARGEABLE BAR BALI

1094



RECHARGEABLE BAR BALI

Catalogue number	Product category	Type	Light source colour temp (K)	Body colour	Glowing in	Energy class
97BALIRGB/NE	D	LED bar	RGBW	Neutral	RGBW	A+ A++ A

Rechargeable LED

Remote control

Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.

Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases | Dimensions: LxWxH (mm): 1200x1100x800



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.

LED FURNITURE








LAGOS
97LAGOS/BI

LAGOS

1097

LED FURNITURE



LAGOS

Catalogue number BAR STOOL - Without Light	Product category	Type	Light source colour temp. (K)	Body colour	Glowing in
97LAGOS/BI	D	Stool	Without	White	Not illuminated
97LAGOS/70	D	Stool	Without	Cherry	Not illuminated
97LAGOS/78	D	Stool	Without	Turtle-dove	Not illuminated
97LAGOS/84	D	Stool	Without	Anise	Not illuminated
97LAGOS/89	D	Stool	Without	Turquoise	Not illuminated

Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Dimensions: DxWxH (mm): 400x470x750



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



MALAGA
97MALAGA27/NE



1098

RECHARGEABLE TABLE MALAGA

Catalogue number	Product category	Type	Light source colour temp (K)	Body colour	Glowing in	Energy class
97MALAGA27/NE	D	LED table	3000	Neutral	Warm White	A+ A++→A
97MALAGA64/NE	D	LED table	5500	Neutral	Cold White	A+ A++→A
97MALAGARGB/NE	D	LED table	RGBW	Neutral	RGBW	A+ A++→A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.

Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases | Dimensions: DxH (mm): 670x1100 | PMMA included

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.




sing
icial

ores.
mundo
oteca...



CAFÉ

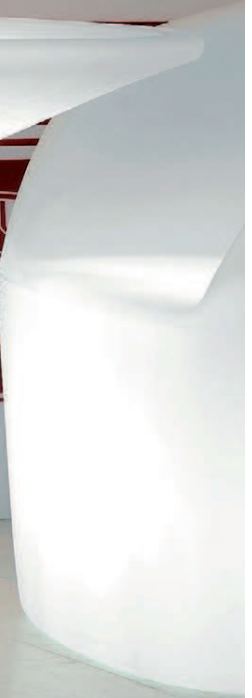



BERMUDA
97BERMUDARGB/NE



RECHARGEABLE TABLE BERMUDA

Catalogue number	Product category	Type	Light source colour temp (K)	Body colour	Glowing in	Energy class
97BERMUDARGB/NE	D	LED table	RGBW	Neutral	RGBW	A+ A++ A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.

Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases | Dimensions: DxH (mm): 800x740 | PMMA included



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



IBIZA
97IBIZARGB/NE

RECHARGEABLE TABLE IBIZA

1102



RECHARGEABLE TABLE IBIZA

Catalogue number	Product category	Type	Light source colour temp (K)	Body colour	Glowing in	Energy class
97IBIZARGB/NE	D	LED table	RGBW	Neutral	RGBW	A+ A++ A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.


Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases | Dimensions: DxH: (mm): 600x1140 | PMMA included



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.

LED FURNITURE



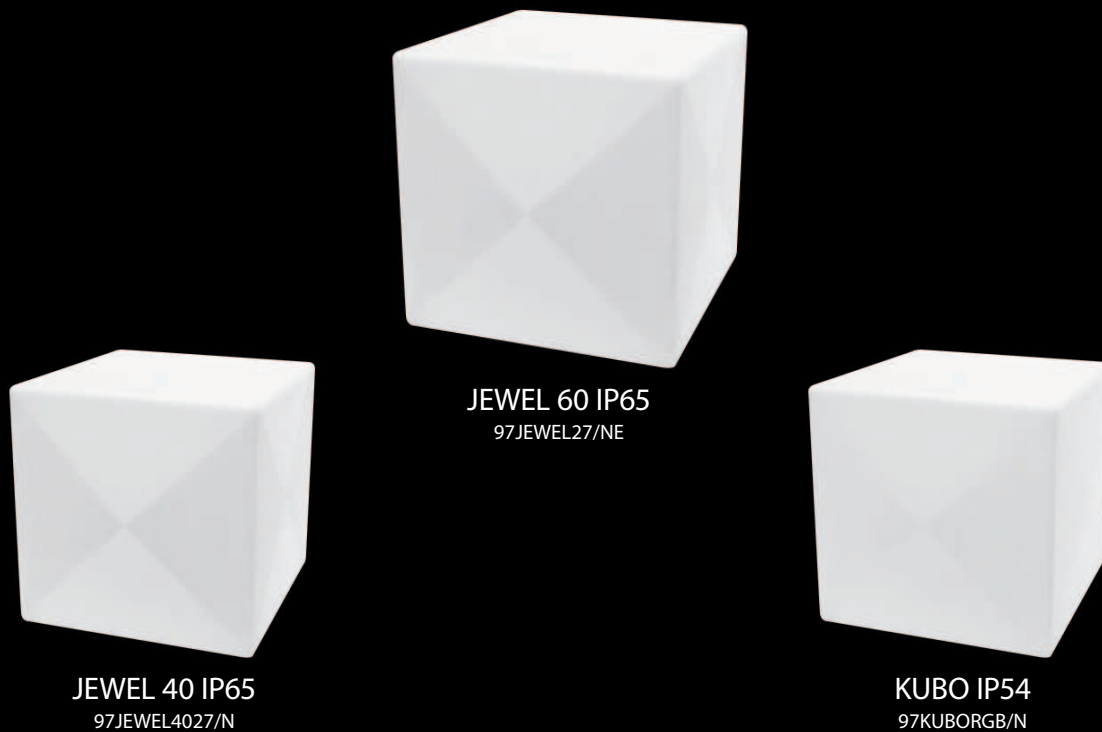

JEWEL 40 IP65
97JEWEL4027/N

JEWEL 60 IP65
97JEWEL27/NE

KUBO IP54
97KUBORGB/N



RECHARGEABLE TABLES JEWEL & KUBO*

Catalogue number TYPE JEWEL40	Product category	Catalogue number TYPE JEWEL60	Catalogue number TYPE KUBO	Type	Light source colour temp (K)	Body colour	Glowing in	Energy class
97JEWEL4027/NE	D	97JEWEL27/NE		LED table	3000	Neutral	Warm White	A+ A++A
97JEWEL4064/NE	D	97JEWEL64/NE		LED table	5500	Neutral	Cold White	A+ A++A
97JEWEL40RGB/NE	D	97JEWELRGB/NE	97KUBORGB/N	LED table	RGBW	Neutral	RGBW	A+ A++A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type


At our website www.elmarkholding.eu you would find a video clip showing each product lighted.


Material: JEWEL: Resin KUBO: LLDPE | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases
Dimensions LxWxH (mm): KUBO: 400x400x380; JEWEL40: 400x400x400; JEWEL60: 600x600x600

* Year Total Warranty: 2+0




In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.

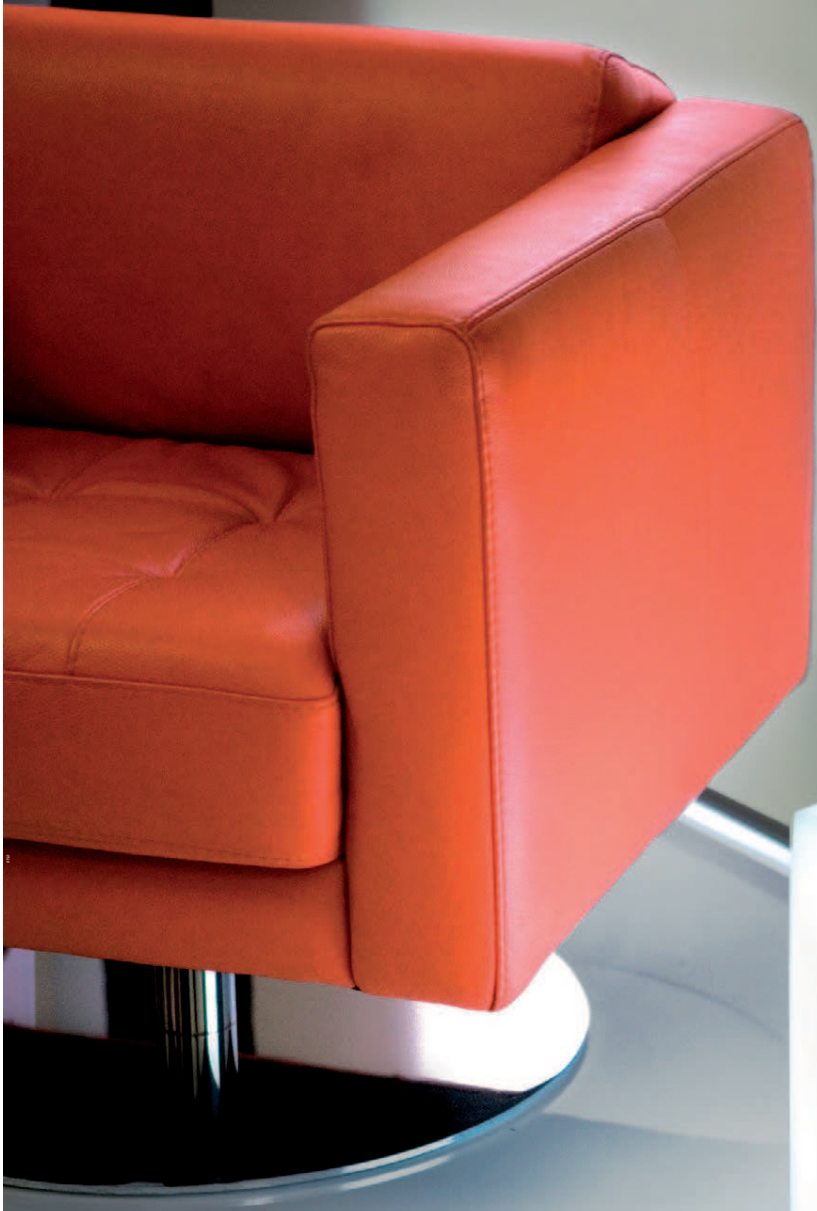

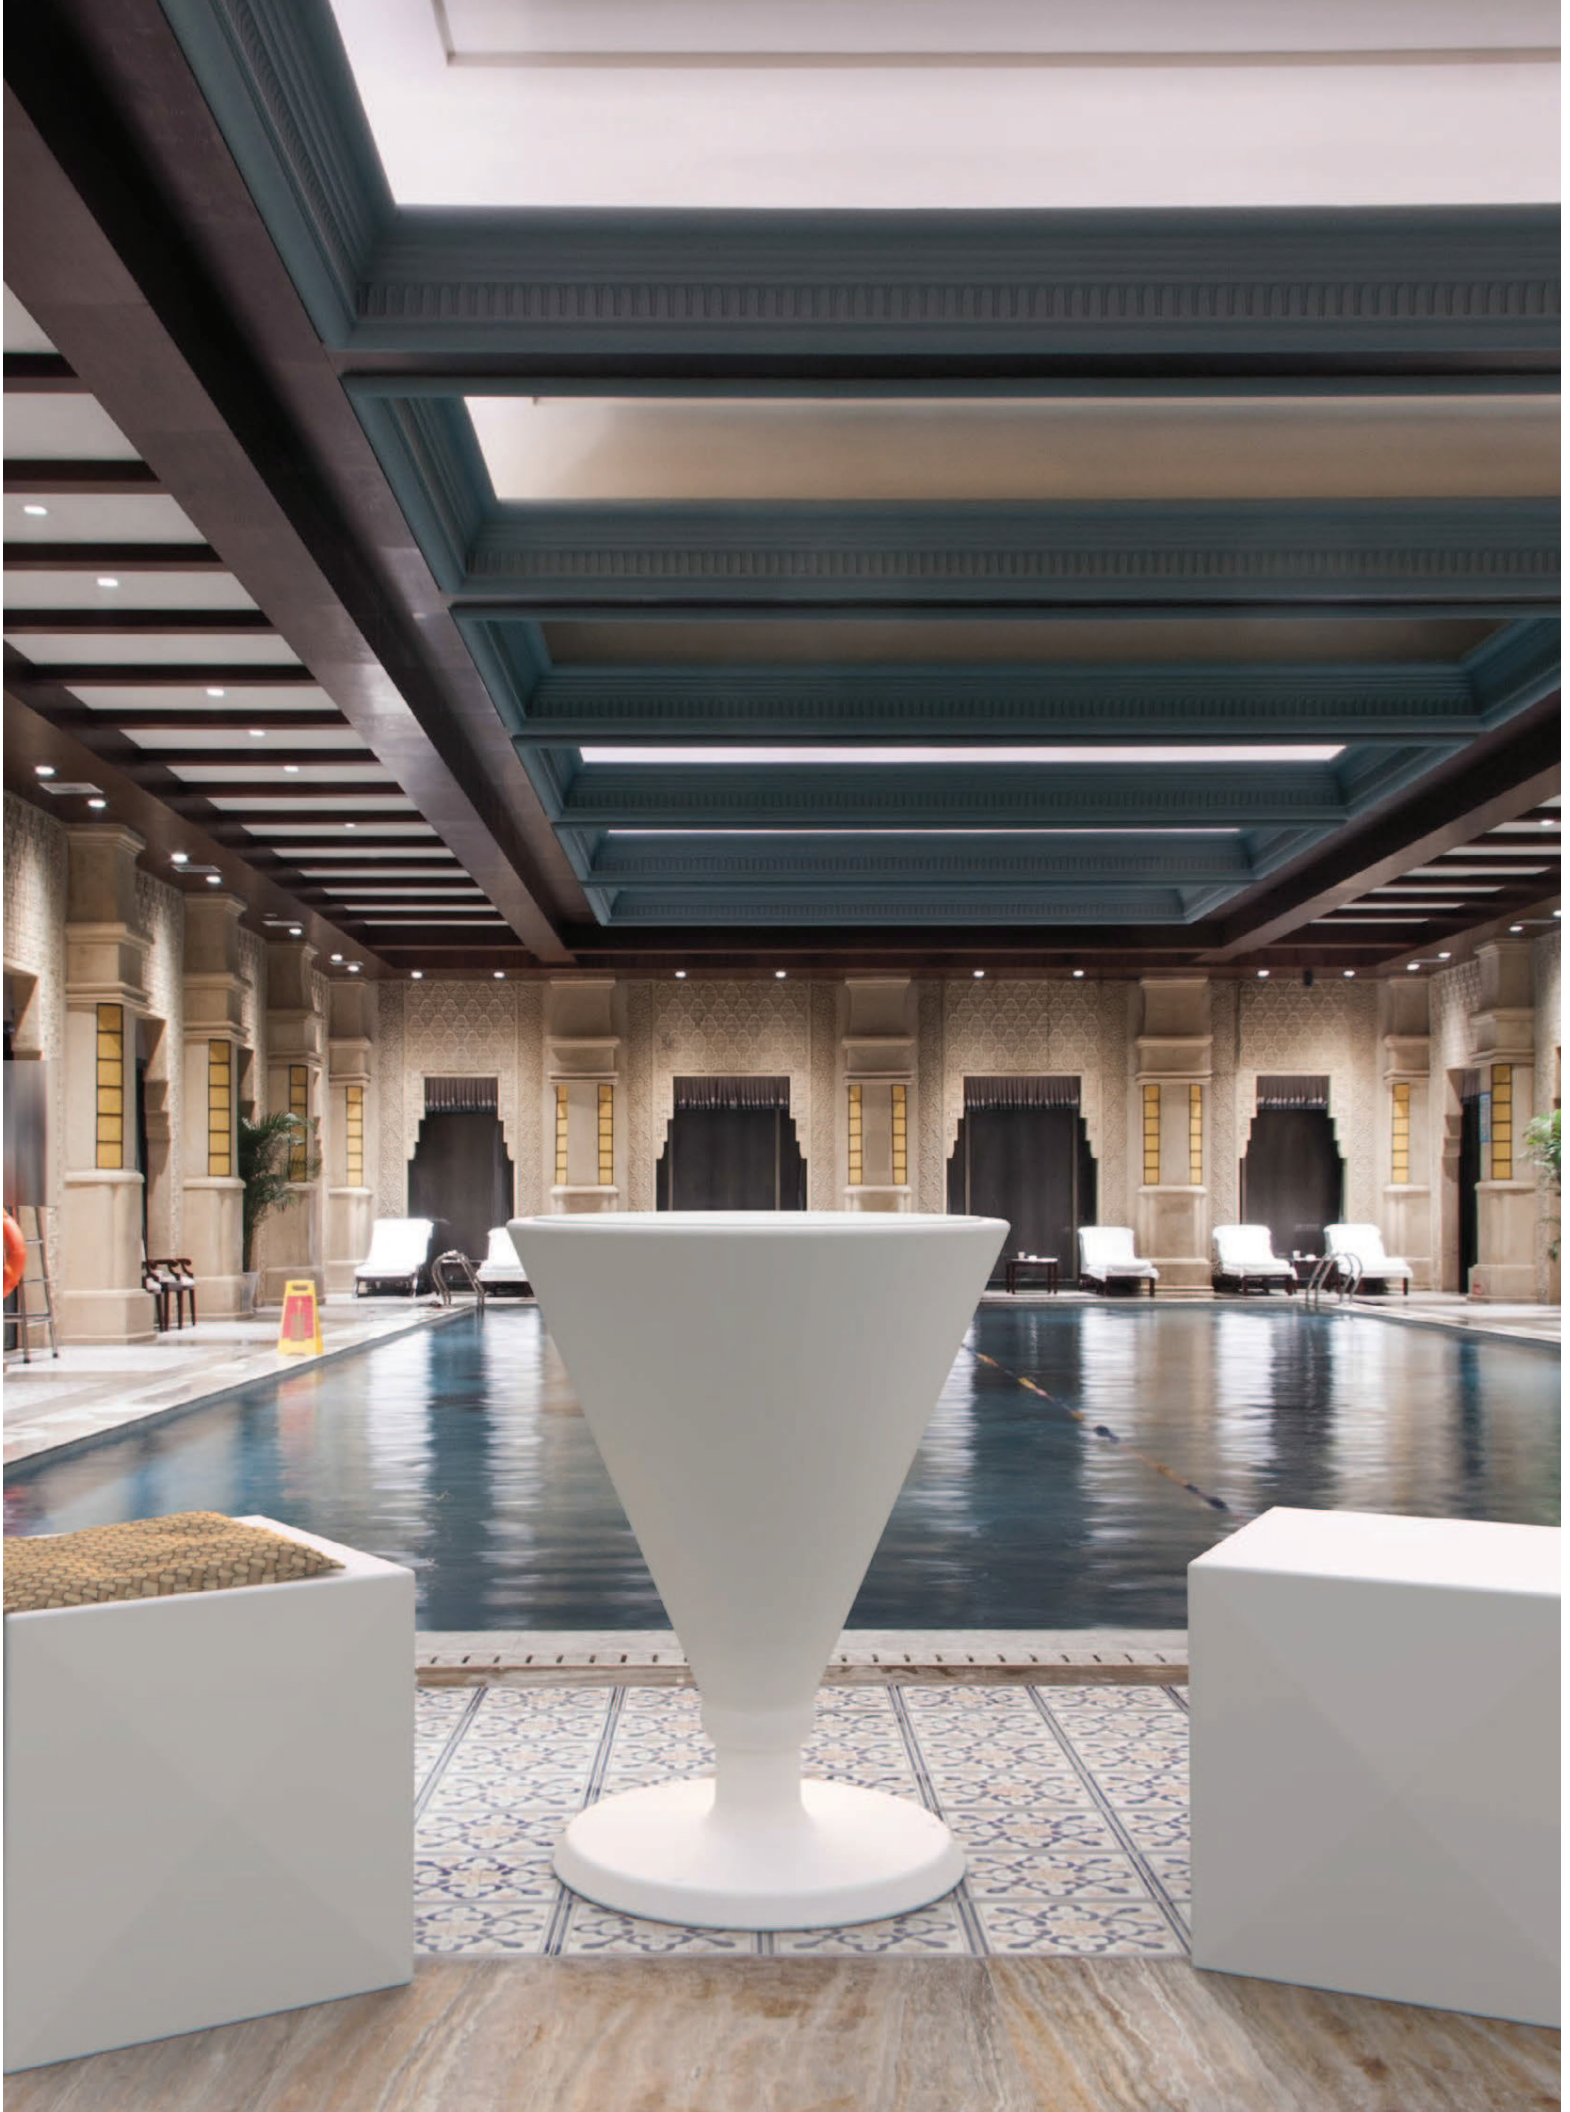



VARNA
97VARNARGB/NE



RECHARGEABLE TABLE VARNA

Catalogue number	Product category	Type	Light source colour temp (K)	Body colour	Glowing in	Energy class
97VARNARGB/NE	D	LED Table	RGBW	Neutral	RGBW	A+ A++ A

Rechargeable LED



Remote control



Charger




All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.

Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases | Dimensions: DxH (mm): 600x740



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.

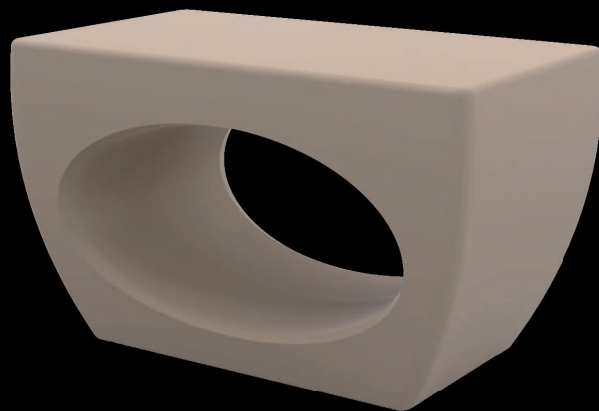


BORNEO
97BORNEO/BI

BORNEO

1108

LED FURNITURE



BORNEO

Catalogue number	Product category	Type	Light source colour temp (K)	Body colour	Glowing in
97BORNEO/BI	D	Table	Without	White	Not illuminated
97BORNEO/70	D	Table	Without	Cherry	Not illuminated
97BORNEO/78	D	Table	Without	Turtle-dove	Not illuminated
97BORNEO/84	D	Table	Without	Anise	Not illuminated
97BORNEO/89	D	Table	Without	Turquoise	Not illuminated

Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Dimensions: LxWxH (mm): 400x85x400



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.







SALERNO
97SALERNOS27/NE



SALERNO
97SALERNO27/NE



IP65



DIMMABLE
RGBW



RECHARGEABLE SOFA & ARMCHAIR SALERNO

Catalogue number SOFA	Product category	Catalogue number ARMCHAIR	Light source colour temp (K)	Body colour	Glowing in	Energy class
97SALERNOS27/NE	D	97SALERNO27/NE	3000	Neutral	Warm White	A ⁺ A ⁺⁺ →A
97SALERNOS64/NE	D	97SALERNO64/NE	5500	Neutral	Cold White	A ⁺ A ⁺⁺ →A
97SALERNOSRGB/NE	D	97SALERNORGB/NE	RGBW	Neutral	RGBW	A ⁺ A ⁺⁺ →A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.

Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases | Dimensions: LxWxH (mm): 1590x830x800



3+2
standard
+extended

5 YEAR TOTAL
WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



LISBOA
97LISBOA27/NE

RECHARGEABLE LED ARMCHAIR LISBOA

1112

LED FURNITURE








RECHARGEABLE LED ARMCHAIR LISBOA

Catalogue number	Product category	Type	Light source colour temp (K)	Body colour	Glowing in	Energy class
97LISBOA27/NE	D	LED Armchair	3000	Neutral	Warm White	A+ A++→A
97LISBOA64/NE	D	LED Armchair	5500	Neutral	Cold White	A+ A++→A
97LISBOARGB/NE	D	LED Armchair	RGBW	Neutral	RGBW	A+ A++→A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.

Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases | Dimensions: LxWxH (mm): 740X700X800






In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.







CANCUN
97CANCUN27/NE



RECHARGEABLE PYLON CANCUN

Catalogue number	Product category	Type	Light source colour temp (K)	Body colour	Glowing in	Energy class
97CANCUN27/NE	D	LED pylon	3000	Neutral	Warm White	A+ A++>A
97CANCUN64/NE	D	LED pylon	5500	Neutral	Cold White	A+ A++>A
97CANCUNRGB/NE	D	LED pylon	RGBW	Neutral	RGBW	A+ A++>A

Rechargeable LED



Remote control



Charger




All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.

Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases | Dimensions: DxH: (mm): 400X600



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.

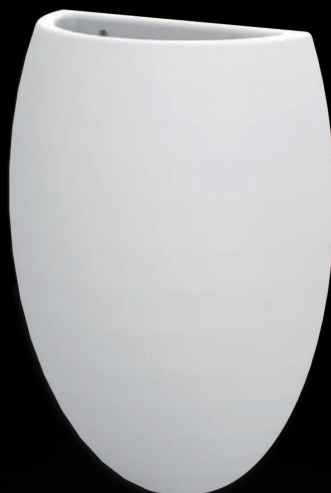

GENEVA
97GENEVA27/NE

RECHARGEABLE FLOWER POT GENEVA

1116

LED FURNITURE

LED IP65 MADE IN ITALY DIMMABLE RGBW



RECHARGEABLE FLOWER POT GENEVA

Catalogue number	Product category	Type	Light source colour temp (K)	Body colour	Glowing in	Energy class
97GENEVA27/NE	D	LED flower pot	3000	Neutral	Warm White	A+ A++→A
97GENEVA64/NE	D	LED flower pot	5500	Neutral	Cold White	A+ A++→A
97GENEVARGB/NE	D	LED flower pot	RGBW	Neutral	RGBW	A+ A++→A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.

Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases | Dimensions: DxH: (mm): 400X600

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.







NICE
97NICE10527/N



RECHARGEABLE FLOWER POT NICE

Catalogue number TYPE 65	Product category	Type	Light source colour temp. (K)	Body colour	Glowing in	Energy class
97NICE10527/N	D	LED flower pot	3000	Neutral	Warm White	A+ A++>A
97NICE10564/N	D	LED flower pot	5500	Neutral	Cold White	A+ A++>A
97NICE105RGB/N	D	LED flower pot	RGBW	Neutral	RGBW	A+ A++>A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.

Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Inside pot not included | Light source: Rechargeable LED bases | Dimensions : LxWxH (mm): 500x500x1050




In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.





SYDNEY
97SYDNEY27/N



RECHARGEABLE FLOWER POT SYDNEY

Catalogue number TYPE 65	Product category	Type	Light source colour temp. (K)	Body colour	Glowing in	Energy class
97SYDNEY27/N	D	LED flower pot	3000	Neutral	Warm White	A+ A++>A
97SYDNEY64/N	D	LED flower pot	5500	Neutral	Cold White	A+ A++>A
97SYDNEYRGB/N	D	LED flower pot	RGBW	Neutral	RGBW	A+ A++>A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.

Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Inside pot not included | Light source: Rechargeable LED bases | Dimensions DxH (mm): 510x1050



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.




BERN
97BERN27/N

RECHARGEABLE FLOWER POT BERN

1122

LED FURNITURE



RECHARGEABLE FLOWER POT BERN

Catalogue number TYPE 65	Product category	Type	Light source colour temp. (K)	Body colour	Glowing in	Energy class
97BERN27/N	D	LED flower pot	3000	Neutral	Warm White	A+ A++→A
97BERN64/N	D	LED flower pot	5500	Neutral	Cold White	A+ A++→A
97BERNRGB/N	D	LED flower pot	RGBW	Neutral	RGBW	A+ A++→A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.

Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Inside pot not included | Light source: Rechargeable LED bases | Dimensions LxWxH (mm): 500x500x480



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.







FLORENCE
97FLORENCE27/N



RECHARGEABLE FLOWER POT FLORENCE

Catalogue number TYPE 65	Product category	Type	Light source colour temp. (K)	Body colour	Glowing in	Energy class
97FLORENCE27/N	D	LED flower pot	3000	Neutral	Warm White	A+ A++>A
97FLORENCE64/N	D	LED flower pot	5500	Neutral	Cold White	A+ A++>A
97FLORENCERGB/N	D	LED flower pot	RGBW	Neutral	RGBW	A+ A++>A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.

Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Inside pot not included | Light source: Rechargeable LED bases | Dimensions DxH (mm): 650x700



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



SIENA
97SIENA27/NE



ELBA
97ELBA27/NE



RECHARGEABLE FLOWER POTS SIENA & ELBA

Catalogue number SIENA	Product category	Catalogue number ELBA	Type	Light source colour temp (K)	Body colour	Glowing in	Energy class
97SIENA27/NE	D	97ELBA27/NE	LED flower pot	3000	Neutral	Warm White	A+ A++A
97SIENA64/NE	D	97ELBA64/NE	LED flower pot	5500	Neutral	Cold White	A+ A++A
97SIENARGB/NE	D	97ELBARGB/NE	LED flower pot	RGBW	Neutral	RGBW	A+ A++A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.

Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases | Dimensions SIENA: LxWxH (mm): 740x780x610 | Dimensions ELBA: LxWxH (mm): 570x330x610



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.






LUGANO
97LUGANO27/NE



LUSON
97LUSON27/NE

RECHARGEABLE FLOWER POTS LUGANO & LUSON



RECHARGEABLE FLOWER POTS LUGANO & LUSON

Catalogue number	Product category	Catalogue number	Type	Light source	Body colour	Glowing in	Energy class
LUGANO		LUSON					
97LUGANO27/NE	D	97LUSON27/NE	LED flower pot	3000	Neutral	Warm White	A+ A++→A
97LUGANO64/NE	D	97LUSON64/NE	LED flower pot	5500	Neutral	Cold White	A+ A++→A
97LUGANORGB/NE	D	97LUSONRGB/NE	LED flower pot	RGBW	Neutral	RGBW	A+ A++→A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.

Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases | Dimensions LUSON: LxWxH (mm): 900x290x770 | Dimensions LUGANO: LxWxH (mm): 610x280x770



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



ENERGY EFFICIENCY LABELS

This lighting fixture is compatible with LED lamps from energy classes.

The information in brackets at the centre of the label indicates which lamps may be used for the luminaire. In this case, the product is only compatible with lamps with an energy efficiency rating of better than B.

If lamps are included with the luminaire, their energy classes are indicated at the bottom of the label.

This lighting fixture comes with LED lamp from energy class.

874/2012

This lighting fixture is compatible with lamps from energy classes.

The information in brackets at the centre of the label indicates which lamps (which EEL) may be used for the luminaire. In this case, the product is compatible with lamps with all energy efficiency ratings.

If lamps are included with the luminaire, their energy classes are indicated at the bottom of the label.

This lighting fixture comes with lamp from energy class.

874/2012

This lighting fixture contains built-in LED lamps from energy classes.

This label indicates that the luminaire is sold with built-in LED lamps that cannot be replaced by the consumer himself.

The lamps in the lighting fixture cannot be changed.

874/2012

This lighting fixture is compatible with lamps from energy classes.

This label indicates that no lamps are included with the luminaire. Consumers are free to choose their preferred lamp within the indicated energy classes.

874/2012

INDICATES, WHICH LAMPS MAY BE USED FOR THE LUMINAIRE.

1130

A⁺⁺→A

The product is compatible with LED boards with energy efficiency - A... A⁺⁺. The Luminaire contains highly efficient LED boards (cannot be replaced by the end consumer)

A⁺ A⁺⁺→A

The product is compatible with LED boards with an energy efficiency rating - A...A⁺⁺. The Luminaire contains highly efficient lamp A⁺.

A A⁺⁺→E

The product is compatible with lamps with an energy efficiency rating - E... A⁺⁺. The Luminaire contains highly efficient lamp A.

B A⁺⁺→B

The product is compatible with lamps with an energy efficiency rating - B... A⁺⁺. The Luminaire contains highly efficient lamp B.

A⁺⁺→B

The product is compatible with lamps with an energy efficiency rating - B... A⁺⁺.

A⁺⁺→C

The product is compatible with lamps with an energy efficiency rating - C... A⁺⁺.

A⁺⁺→D

The product is compatible with lamps with an energy efficiency rating - D... A⁺⁺.

A⁺⁺→E

The product is compatible with lamps with an energy efficiency rating - E... A⁺⁺.

A⁺⁺ A⁺ A

incl. efficient LED lamps

B C

incl. efficient fluorescent lamps

D E

incl. halogen lamps

HOW TO USE OUR CATALOGUE




VEGA

Catalogue number	Model	Watt (W)	Lamp	Whole fixture lumens (lm)	Colour temp. (K)	Socket	Colour body	Length (mm)	Width (mm)	Height (mm)	Energy class
989007LED	VEGA J-78	5.5	LED	440	4000	R7s	white	200	145	120	A+ A++
989010LED	VEGA J-118	7.5	LED	700	4000	R7s	white	250	210	230	A+ A++
989009LED	VEGA J-78	5.5	LED	440	4000	R7s	grey	200	145	120	A+ A++
989012LED	VEGA J-118	7.5	LED	700	4000	R7s	grey	260	210	230	A+ A++
989008LED	VEGA J-78	5.5	LED	440	4000	R7s	black	200	145	120	A+ A++
989011LED	VEGA J-118	7.5	LED	700	4000	R7s	black	250	210	230	A+ A++
989017LED	VEGA J-78 with sensor	5.5	LED	440	4000	R7s	white	210	145	120	A+ A++
989019LED	VEGA J-118 with sensor	7.5	LED	700	4000	R7s	white	260	210	230	A+ A++
989018LED	VEGA J-78 with sensor	5.5	LED	440	4000	R7s	grey	210	145	120	A+ A++

incl. highly efficient LED lamps from energy class A+
This luminaire can be used with lamps from the indicated energy classes.

ELMARK lighting



This lighting fixture is compatible with LED lamps from energy classes.

A++

A+

A

B

C

D

E


}

L

E

D

This lighting fixture comes with LED lamp from energy class. A+

874/2012 



LED PEAR

Catalogue number	Watt (W)	LED lamp lumens (lm)	Colour temp. (K)	Colour of light	Beam angle	Length (mm)	Diameter (mm)	Energy class
99LED588	12	960	4000	white	240°	127	67	A+
99LED587	12	960	2700	warm white	240°	127	67	A+
99LED582	12	960	4000	white	180°	127	67	A+
99LED581	12	960	2700	warm white	180°	127	67	A+
99LED721	15	1200	4000	white	180°	153	80	A+
99LED722	15	1200	2700	warm white	180°	153	80	A+

Energy efficiency labels

ENERGY LABEL Y U A IE IA

енергия · енергетика

ELMARK lighting

A++

A+

A

B

C

D

E

}

A+

XXX kWh/1000h

ENERGY LABEL Y U A IE IA

енергия · енергетика

ELMARK lighting

A++

A+

A

B

C

D

E

}

A+

XXX kWh/1000h

Supplier's name or trade mark
Supplier's model identifier

Energy efficiency class of the appliance

Coloured arrows are used to differentiate energy efficient from less energy efficient products: dark green indicates a highly efficient product and red a low efficiency product.

Annual energy consumption in kWh

SYMBOLS USED IN THE CATALOGUE

Protection class

The protection class indicates to what extent the lamp is protected against electric shock. All lamps in this catalogue are at least protected with the protection class 1 - a higher class is specified in the information box of the respective lamp.



protection class 1:
protective earthing



protection class 2:
protective insulation



protection class 3:
protective low voltage

Protection rating

The protection rating ensures the operational safety of luminaires. The first number specifies the extent of the protection against the ingress of foreign bodies; the second number identifies the humidity protection grade. All luminaires in this catalogue are at least protected with the rating IP20 – a higher rating is specified in the information box of the luminaire.

IP 20

IP 21

IP 30

IP 44

IP 54

IP 64

IP 65

IP 67

Beam angle

The beam angle describes the „light cone“ emitted by a directional illuminant. It corresponds to the angle at which the luminous intensity is 50% of the centre beam intensity. An illuminant is called directional if at least 80% of its light output is within a cone with an angle of 120°.

36°

60°

90°

120°

160°

180°

300°

120°
SENSOR

Average lifetime

The average lifetime of illuminants describes the time after which 50% of a number of illuminants has failed. For LED illuminants, the average lifetime is defined by a lumen maintenance of 70%.

30000h

Average lifetime

Colour rendering index

Colour rendering index (CRI) is a measure of a light source's ability to show object colours "realistically" or "naturally". Can take values from 0 to 100.

Ra>70

Ra>80

Ra≥80

Ra≥82

Dimmable

Light sources labelled as "dimmable" can be dimmed with a suitable commercially available dimmer. The dimmable range for LED might be restricted. If the sign is crossed the illuminant is not dimmable.



Dimmable



Non-dimmable

Warm-up time (60 %) (s)

Time for warming the lamp up to 60% of its full luminous flux (if the time is less than 1 second, it can be indicated as „instant full light“).



Number of switches

Number of commutations until the untimely failure of lamp.



Mercury content

The content of Mercury in the lamp. If there is Mercury, this is shown as follows <X.X mg.



SMD LED

SMD is a type of LED module that use Surface mount technology (SMT) to mount LED chips on printed circuit boards (PCB). SMD LED modules are widely used for backlighting, home illumination, shop-windows, advertising, automobile interior lighting, Christmas lights etc.

SMD

SMD 3014

SMD 3528

SMD 5050

COB LED

COB (Chips on Board), is a new technology of LED packaging for LED light engine. Multi LED chips are packaged together as one lighting module. When it light up, it looks like a lighting panel.

COB

COB BRACKET

Type of diode

High power LED

HIGH POWER LED - a certain number of single diodes with small power - usually 1W, connected in a specific way, and mounted in one body covered by optics (lens). They are used in light sources and lighting fixtures with small beam angle and high luminous intensity of diode

High power

LAMP BASE



E14



E27



E40



GU10



G4



GU5.3



G9



G13



G5




G12



R7s



Rx7s



G24d




















































G23







2G11

IMPORTANT: LED luminaires and lamps must not be connected in an electrical circuit, together with luminaires for discharge lamps

	EU directive compatibility mark		PLC LED lamp		Minimum distance from the illuminated object
	Mounting on the normal flammable base		PLC non - integrated compact fluorescent lamp 2 pin		Ground mounting
	Restriction of Hazardous Substances Directive		PLC non - integrated compact fluorescent lamp		Wall mounting
	Electromagnetic compatibility		Compact fluorescent lamp		Ceiling mounting
	Adapted for 230V power supply		GU10 LED lamp		Wall and ceiling mounting
	Adapted for 230V direct current power supply		GU10 halogen bulb		For outdoor use
	Adapted for 230V via suitable power supply (transformer/ballast/driver)		MR16 LED lamp		For indoor use
	Adapted for 12V power supply		MR-16 halogen bulb		For outdoor and indoor use
	Adapted for 12V direct current power supply		G-9 halogen bulb		Fixed fitting
	Adapted for 12V alternating current power supply		JC halogen bulb		Movable fitting
	Adapted for 12V alternating/direct current power supply		MH-7 metal halide lamp		Reel length
	Power supply frequency		MH-40 metal halide lamp		Triple rail terminal block 2.5mm ²
	Power supply (transformer/ballast/driver) included		T5 linear fluorescent lamp		Triple rail terminal block 2.5mm ²
	Power supply (transformer/ballast/driver) not included		T5 linear fluorescent lamp included in the product		Switch ON / OFF
	The plug is included in the set		T8 linear LED lamp		Do not touch with bare hands
	Light source power		T8 linear fluorescent lamp		
	Light source current		T8 linear fluorescent lamp included in the product		

COLOUR TEMPERATURE

KITCHEN & BATH	WORK SPACES	GARAGE & BASEMENT	CLOSET & LAUNDRY	ACTIVE SPACES
				
WARM		COOL		
3000K warm white colour warm colour tone	3500K natural white colour natural colour tone	4100K neutral white colour neutral colour tone	5000K sunshine colour cool colour tone	6500K daylight colour cold colour tone

LIGHTING

CLASSIC LIGHTING

FACADE AND GROUND LIGHTING


ELMARK
The Space of Lighting

SAMPLE BOARDS





1. Modern & Lux Lighting
Cat. number: 800510

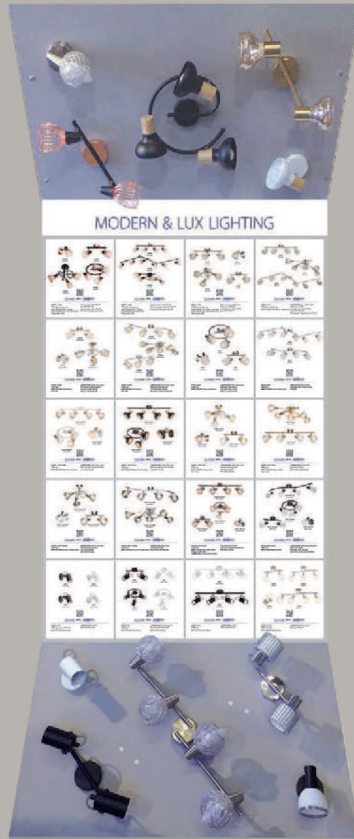

2. Modern & Lux Lighting
Cat. number: 800511



3. Design & Crystal Lighting
Cat. number: 800512



4. Design & Vintage Lighting
Cat. number: 800513



5. Vintage & Classic Lighting
Cat. number: 800514




6. Classic Lighting
Cat. number: 800515



TABLE, FLOOR & SPOT LIGHTING

7. Table, Floor & Spot
Cat. number: 800516

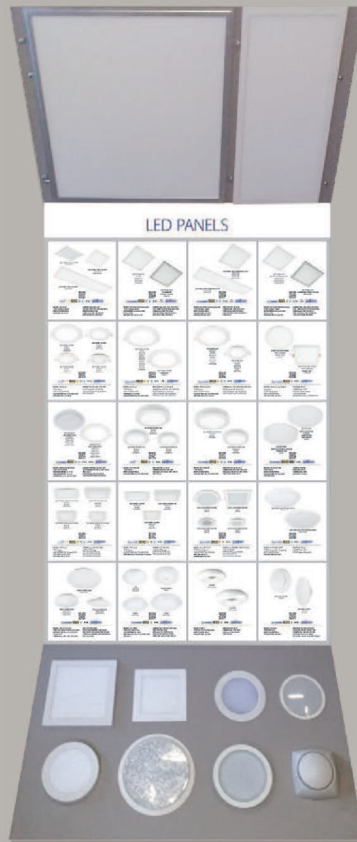

LED PANELS

8. LED Panels
Cat. number: 800517



SPOTLIGHTS

9. Spotlights
Cat. number: 800518



LUMINAIRES & BATHROOM

10. Luminaires & Bathroom
Cat. number: 800519



LED PROFILES & LED STRIPS

11. LED Profiles & LED Strips
Cat. number: 800520



GARDEN LIGHTING

12. Garden Lighting
Cat. number: 800521



13. Facade And Ground Lighting
Cat. number: 800522



14. Waterproof & Flood Lights
Cat. number: 800523



15. Industrial, Solar Lights & Sensors
Cat. number: 800524



16. LED Bulbs
Cat. number: 800525



17. LED Bulbs
Cat. number: 800526



18. Circuit breakers
Cat. number: 800527



19. Contactors & Protection Devices
Cat. number: 800528




20. Control & Protection
Cat. number: 800529



21. Monitoring & Control
Cat. number: 800530



22. Installation
Cat. number: 800531

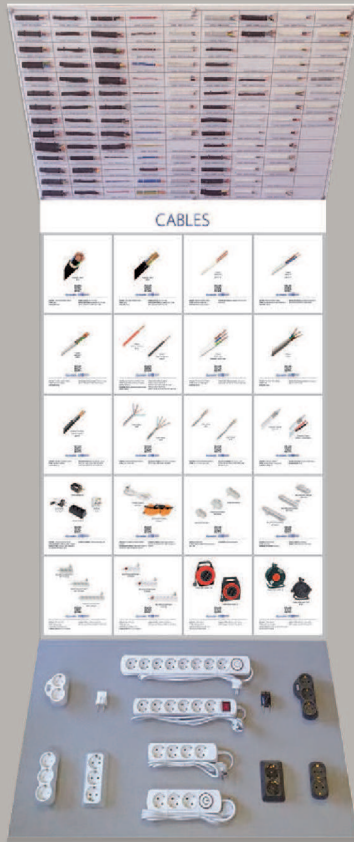


23. Cables
Cat. number: 800532



24. Cable Accessories
Cat. number: 800533




25. Cable Accessories & Tools
Cat. number: 800534

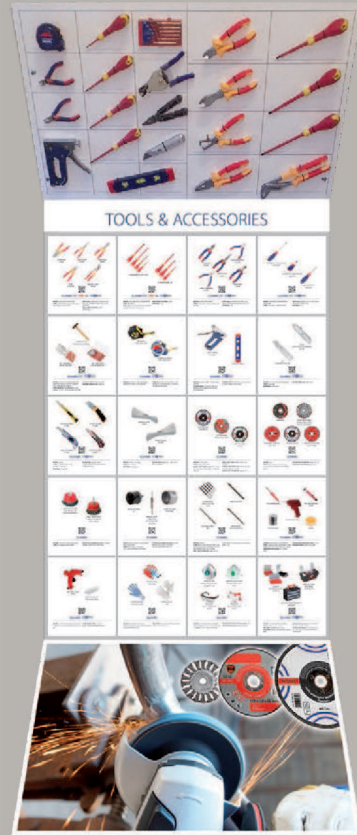

26. Tools & Accessories
Cat. number: 800535



27. Smart & Home Control
Cat. number: 800536

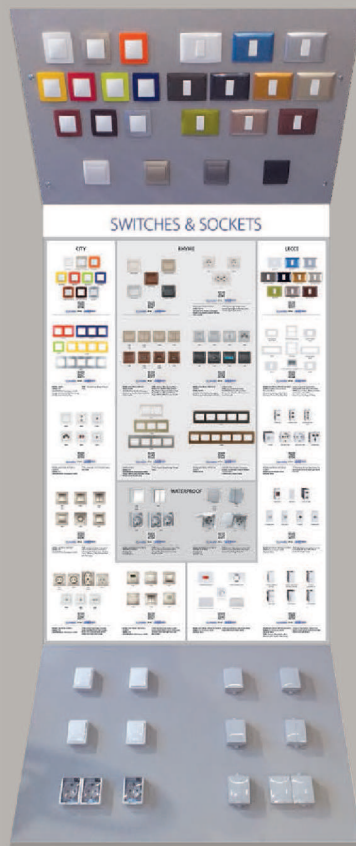

28. Switches & Sockets
Cat. number: 800537



29. Ventilation
Cat. number: 800539



30. Flashlights & Tools
Cat. number: 800541



31. LED Furniture
Cat. number: 800542

LIGHTING

CLASSIC LIGHTING

FACADE AND GROUND LIGHTING

ELMARK The Spirit of Electricity

MONITORING AND SECURITY



The display features a grid of product cards for various lighting fixtures. Each card includes a photograph of the fixture, a QR code, and technical specifications such as model number, wattage, and material. The fixtures shown include pendant lights, chandeliers, track lighting, and outdoor lighting. The counter area includes a computer monitor, a hand scanner, and a hand-held device. A small table in the foreground displays a brass lamp with a white shade and several black cylindrical objects.

ELMARK FRANCHISE

**OPEN YOUR OWN
ELECTRICAL STORE**

**ONLY
10,000€*
INVESTMENT**

* ELMARK reserves its right to determine its own franchising policy regarding each country.

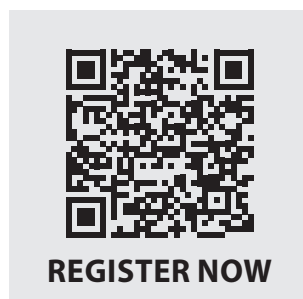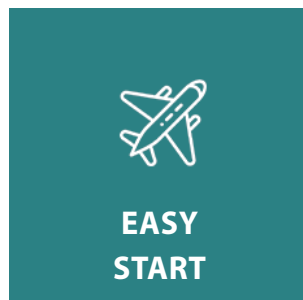

OUR RESPONSIBILITIES FUNDED BY ELMARK

- Design and equip your store
- Define product portfolio
- Manage inventory and availability
- Plan your stock orders
- Deliver your stock orders
- Advertise your store

YOUR RESPONSIBILITIES FUNDED BY YOU

- Choose and rent the property
- Hire and lead the store staff
- Attract, serve and retain clients

THE BENEFITS YOU GAIN:



TRAINING PROGRAM

Our training program is developed to transform you into a successful owner of your ELMARK store.

We provide PAPER / ONLINE / IN-STORE training that will cover all aspects of your business, up-to-date information about ELMARK, new products, the introduction of new sales techniques, trends in global and local trade.



TRAINING PROGRAM

As a member of ELMARK family you have a significant buying and negotiating power thus saving money on equipment, supplies and marketing activities



COMMERCIAL SUPPORT

It is your flying start, a successful store and business concept, store design, training, marketing support and what is more the exclusive opportunity to distribute ELMARK products across the defined territory at exclusive prices. The dedicated franchise manager will walk beside you, answer your questions, suggest proven beneficial practices, he will guide and protect you.



DESIGN & MERCHANDISING

We aim to provide a meaningful end-to-end customer experience and we regard the exterior and interior of our stores of great importance to the positive influence on our clients. The concept of the store aims to guarantee the effectiveness of ELMARK product presentation and decision making.

All ELMARK stores bear unified identity, easily recognized by our clients worldwide.

We provide full support in setting up your ELMARK store, funded by ELMARK.



"There is one rule that is common for the success across all markets around the world – to offer quality goods at balanced prices and to follow a consistent, straightforward and 'win-win' commercial policy"

Jelez Georgiev, CEO



MARKETING

We identify and understand our customers, their habits and motivation. You will benefit timely, innovative and attention-aware advertising campaigns that connect with customers and deepen their relationship with ELMARK brand and our products.



DISPLAY WORKSTATION

**DISPLAY ALL
ELMARK PRODUCTS**

*and latest marketing
campaigns*

GAIN MORE SALES

*and optimize your
day-to-day operations*

SCAN ANY QR CODE ON THE
CATALOGUE OR ON THE BOARD
WITH SAMPLES

CHECK AVAILABILITY
AND DELIVERY TERMS

ADD TO BASKET

LEARN ABOUT ALL CURRENT
ELMARK ADVERTISEMENTS



Cat. number: 800249

SIZE	Length (m)	Width (m)	Height (m)	Weight (kg)
	0,91	0,67	2	52

E-BUSINESS PLATFORM

LOWER OPERATING COSTS

FASTER ORDER FULFILLMENT

REACH NEW CUSTOMERS

A SEAMLESS PLATFORM

*from ordering, payment,
shipping and tracking*

TO 24/7 CUSTOMER SERVICE


and technical support



ELMARK[®] MOBILE APP

Buy online!

- ▶ *Be ahead of competition*
- ▶ *Easy and efficient ordering*
- ▶ *Better Customer Service*
- ▶ *Choice and Flexibility*

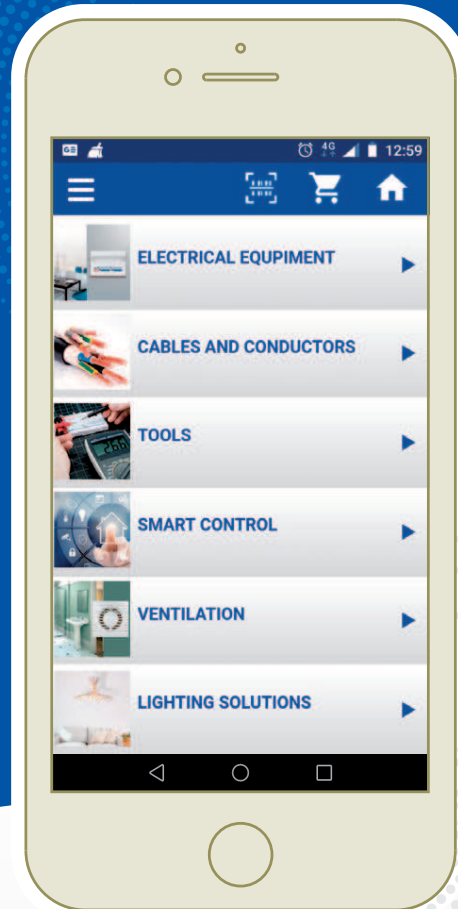

**ENJOY ALL ELMARK E-BUSINESS PLATFORM
FEATURES ON THE GO**

Install Application!



ELMARK[®]



Scan the QR code or visit any app store to download ELMARK App

www.elmarkholding.eu